



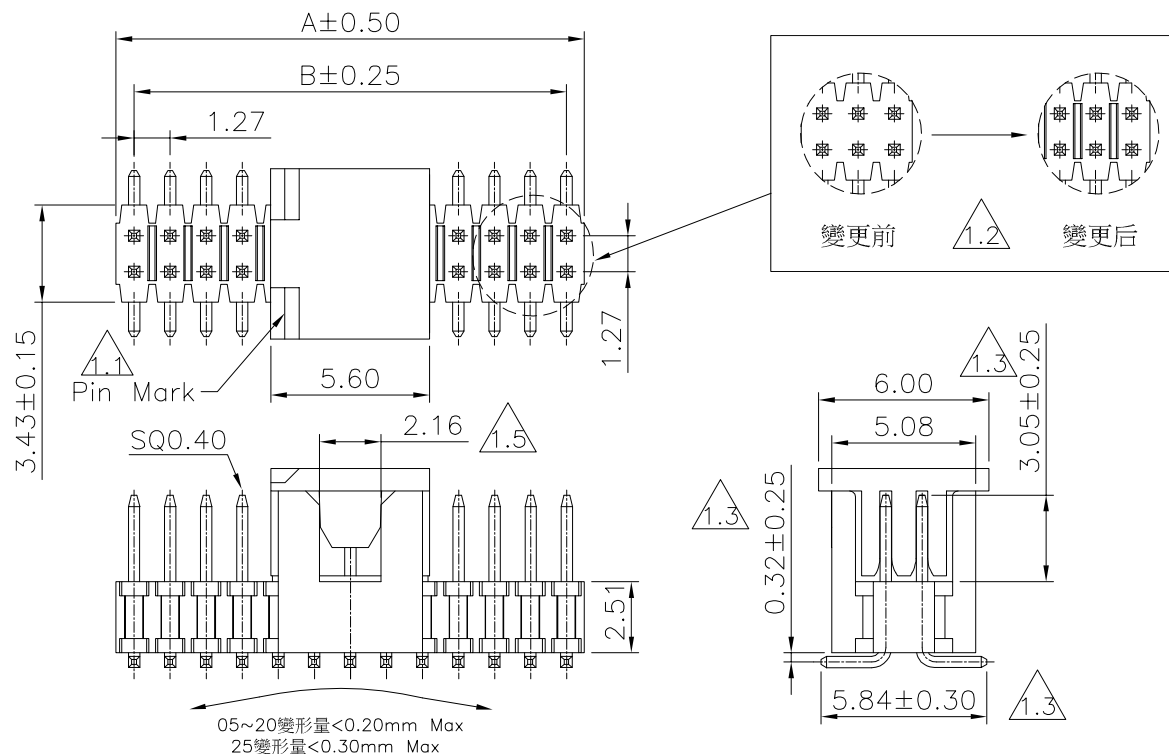

Specifications:
 Current Rating:1.0 Amp
 Voltage Rating:100V AC/DC
 Contact resistance:20m Ohm Max
 Insulator resistance:1000M ohm min.
 Withstanding Voltage:500V AC/Minute
 Operating Temperature Range:-40°~+105°C
 Material And Finish
 Insulator:Nylon6T UL94V-0
 Insulator Color:Black
 Contact:Brass
 Contact Plated:See Contact Plated Tab



NO.	A	B
2*05	6.35	5.08
2*08	10.16	8.89
2*10	12.70	11.43
2*12	15.24	13.97
2*13	16.51	15.24
2*17	21.59	20.32
2*20	25.40	24.13
2*25	31.75	30.48

Recommended PCB Layout

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ± 0.15
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PAK-V29X30C-2Xxx-LF

SERIES 180°SMT HIGH 2.92mm
 LEADFREE 2X05:10 WAY 2X25:50 WAY
 CAP CONTACT 3.05mm
 NON POST

DESCRIPTION: 1.27mm Pitch Pin Header, Dual Row, Vertical SMT Type