
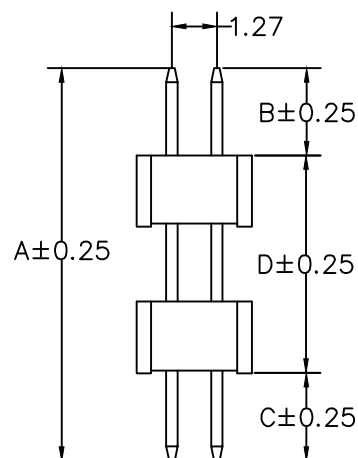


RECOMMENDED P.C.B LAYOUT

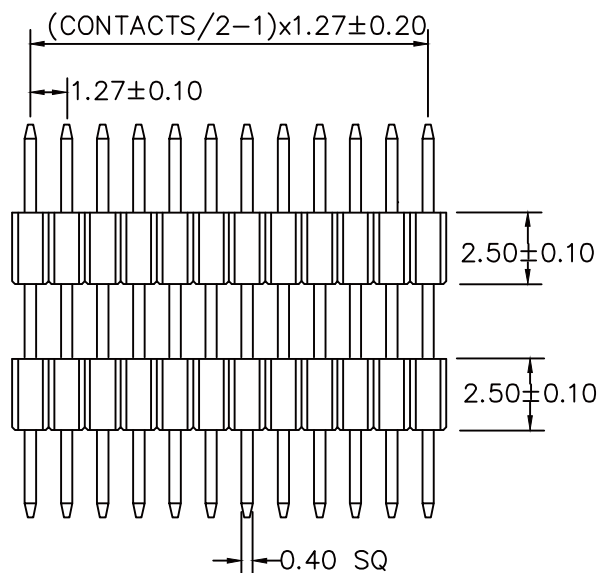

A: 21.50 mm B: 7.30 mm C: 1.30 mm D: 12.90 mm

## MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

## SPECIFICATION

CURRENT: 1A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 5000 MEGAOHMS MIN

DIELECTRIC STRENGTH : 1000 VAC MINON

| CONTACTS | 2X26 |
|----------|------|
| 2X2      | 2X27 |
| 2X3      | 2X28 |
| 2X4      | 2X29 |
| 2X5      | 2X30 |
| 2X6      | 2X31 |
| 2X7      | 2X32 |
| 2X8      | 2X33 |
| 2X9      | 2X34 |
| 2X10     | 2X35 |
| 2X11     | 2X36 |
| 2X12     | 2X37 |
| 2X13     | 2X38 |
| 2X14     | 2X39 |
| 2X15     | 2X40 |
| 2X16     | 2X41 |
| 2X17     | 2X42 |
| 2X18     | 2X43 |
| 2X19     | 2X44 |
| 2X20     | 2X45 |
| 2X21     | 2X46 |
| 2X22     | 2X47 |
| 2X23     | 2X48 |
| 2X24     | 2X49 |
| 2X25     | 2X50 |

## RoHS Compliant

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X, ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG ±

PPOJECTION

照片框

## ORDER INFORMATION

PAS-D2157313-2Xxx-LF

SERIES

LEADFREE

2X02:04WAY

2X50:100WAY

DIP180°

DIP 1.3mm

CONTACT 7.3mm

TOTAL 21.5mm

DESCRIPTION: