
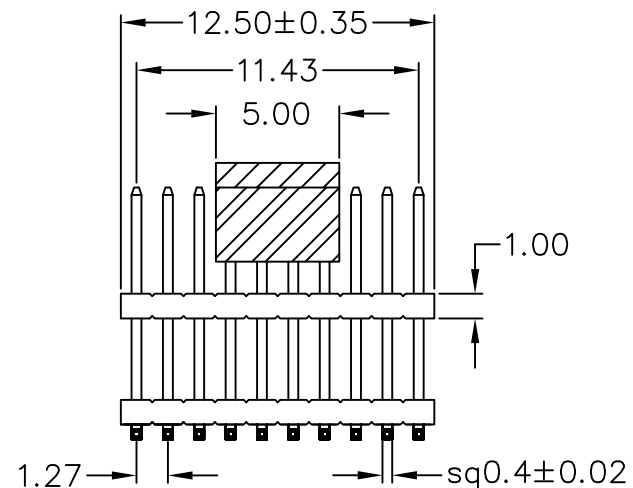
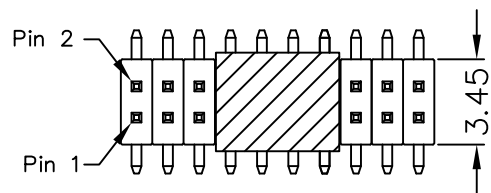


Recommended P.C.B Layout

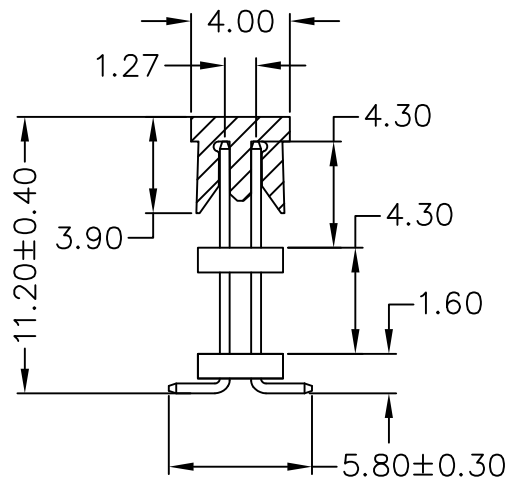

## MATERIAL

Contact Pin : Brass

## SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

## ORDER INFORMATION

PAS-V059X43C-2X10-LF

SERIES

180°SMT

CAP

NON POST

HIGH 5.9mm

CONTACT 4.3mm

20 WAY

LEADFREE

DESCRIPTION: