




APPLICATION AND FEATURES

1. Variable pin length, gold plated.
2. Mates with P.C.Board connectors

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: $-40^{\circ}\sim+105^{\circ}\text{C}$
 Max Processing Temp: 230° for 30 seconds
 Contact Material: Copper alloy
 Insulator Material: Polyester, UL 94V-0
 ©Standard: Nylon-6T

Finish: Gold plated
 ©Standard: Gold flash all over

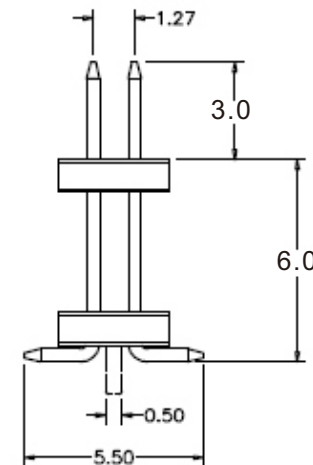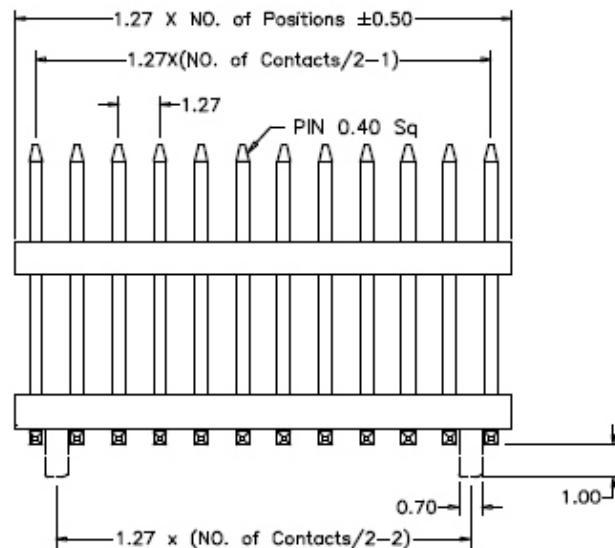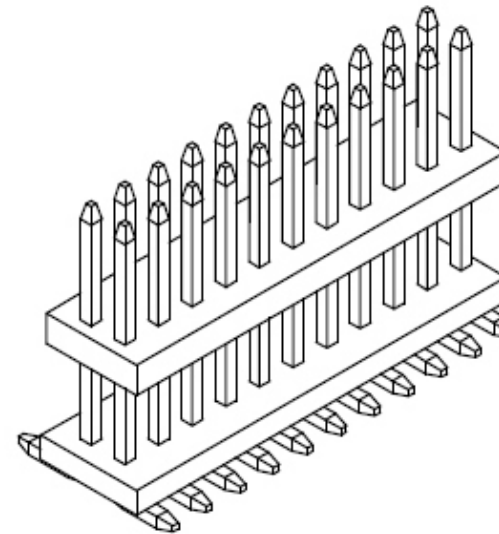

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ±
 .XX ±
 .XXX ±
 ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PAS-V060P30-2Xxx-LF
 SERIES 180°SMT
 LEADFREE
 2X02:04 WAY
 2X50:100 WAY
 CONTACT 4.3mm
 POST
 HIGH 5.9mm

DESCRIPTION: