


RECOMMENDED P.C.B LAYOUT

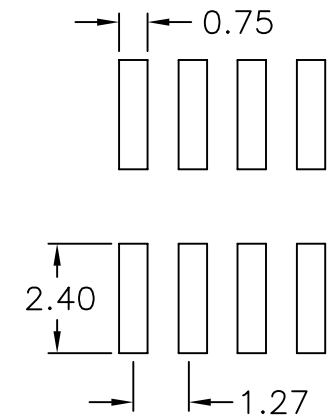

Specifications

Current Rating: 1Amp  
 Insulation Resistance: 5000Mega ohms Min.  
 Dielectric Withstanding: 600 VAC min  
 Contact Resistance: 30mΩ Max.  
 Operating Temperature: -55°C to +105°C

Materials

Contact Material: Copper Alloy  
 Insulation Material: Thermoplastic, UL 94V-0

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES  
 煜倫股份有限公司  
 www.morethanall.com

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT / mm SCALE 1 : 1  
 DATE  
 SIZE A4 PROJECTION

X ±  
 .X ± 0.38  
 .XX ± 0.25  
 .XXX ± 0.13  
 ANG ±

照片框

ORDER INFORMATION

PAS-V080X60-2Xxx-LF  
 SERIES  
 180°SMT  
 LEADFREE  
 2X02:04 WAY  
 2X50:100 WAY  
 CONTACT 6.0mm  
 NON POST  
 HIGH 8.0mm

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS SMT TYPE BASE 2.50H