
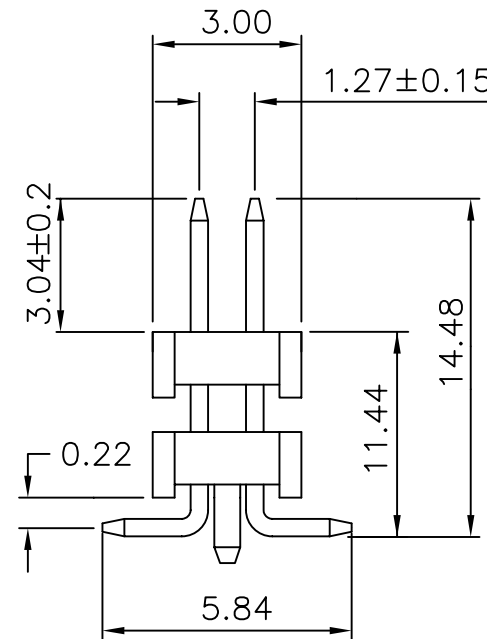


Specifications


Current Rating: 1Amp
 Insulation Resistance: 5000Mega ohms Min.
 Dielectric Withstanding: 600 VAC min
 Contact Resistance: 30mΩ Max.
 Operating Temperature: -55°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Thermoplastic, UL 94V-0

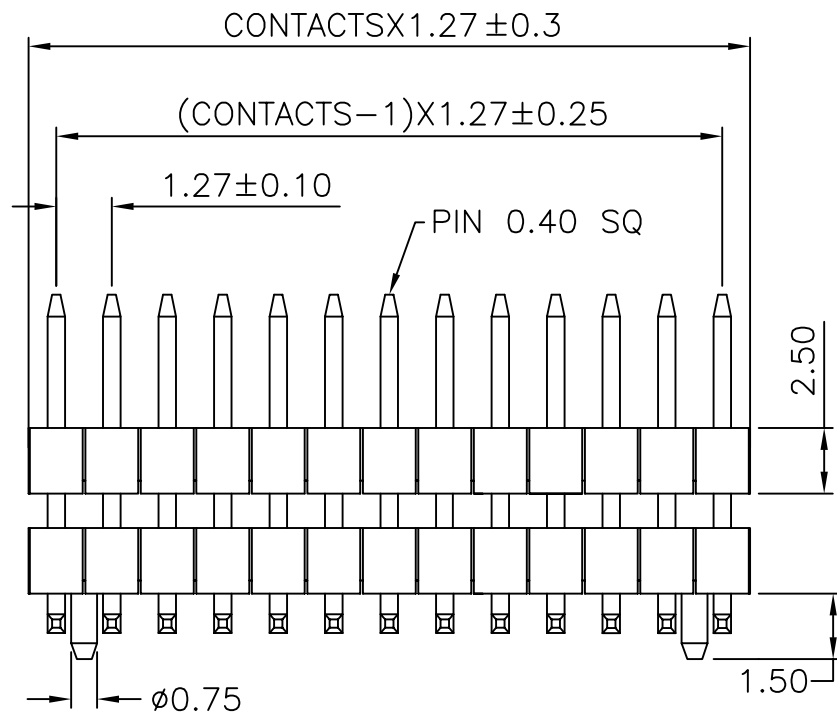

RECOMMENDED P.C.B LAYOUT

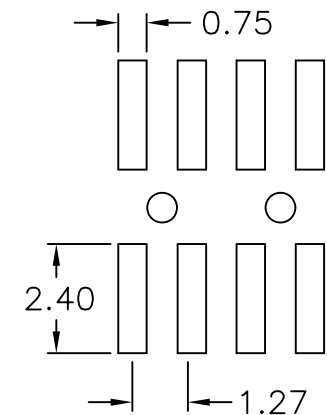

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±

P PROJECTION

照片框

ORDER INFORMATION

PAS-V114P30-2Xxx-LF
 SERIES | | | | LEADFREE
 180°SMT | | | | CONTACT 3.0mm
 POST
 HIGH 11.44mm

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS SMT TYPE BASE 2.50H

煜倫股份有限公司

www.morethanall.com