
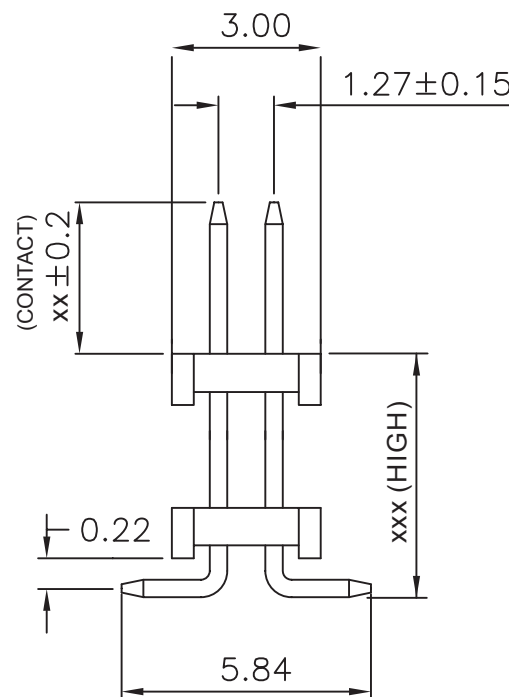
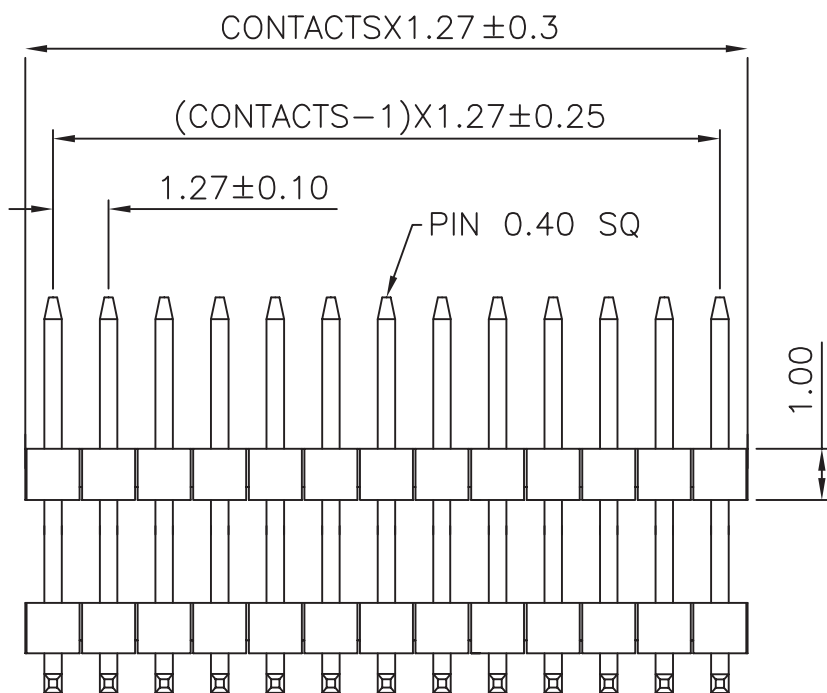


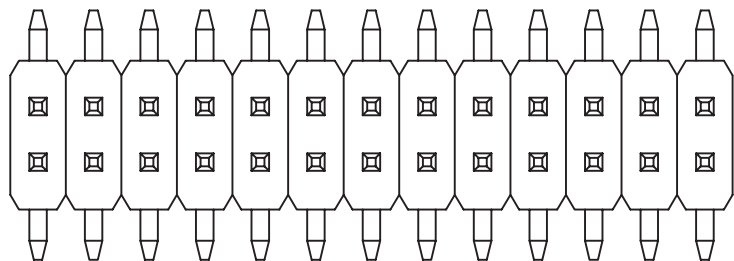

Specifications

Current Rating: 1Amp

Insulation Resistance: 5000Mega ohms Min.

Dielectric Withstanding: 600 VAC min

Contact Resistance: $30\text{m}\Omega$ Max.


Operating Temperature: -55°C to $+105^{\circ}\text{C}$

Materials

Contact Material: Copper Alloy

Insulation Material: Thermoplastic, UL 94V-0

RECOMMENDED P.C.B LAYOUT

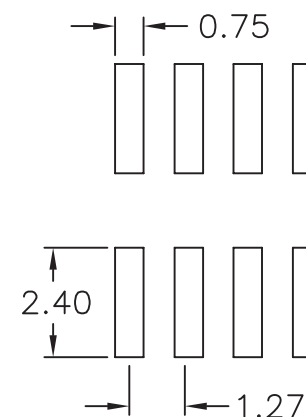

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4


TOLERANCES ARE

X, $\pm$
.X ± 0.38
.XX ± 0.25
.XXX ± 0.13
ANG $\pm$

P PROJECTION



ORDER INFORMATION

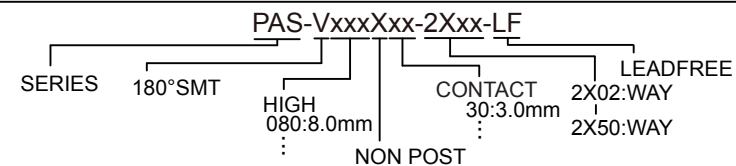

DESCRIPTION: 1.27 PIN HEADER DUAL ROWS SMT TYPE BASE 2.50H