


DETAIL ITEM "4"

P1	1	BLACK
	2	BROWN
	3	RED

WIRING TABLE

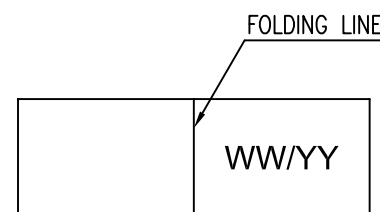

DETAIL ITEM "5"

NOTE : WW/YY, WW is Week, YY is Year
Example : 02/16-2015 is 08/15

Electronics Test :

1. Contact Resistance : 3 Ω Max.
2. 100% open & short test (set at 50 K Ω)
3. At DC = 300V , Insulation Resistance : 20 M Ω Min.
4. Test Condition : Temperature : 25 $\pm$ 5 $^{\circ}$ C , Humidity : 50% RH Max.

5	LABEL, 10.0mm x 30.0mm, WHITE (MARKING "WW/YY", BLACK)	1 PC
4	LABEL, 10.0mm x 30.0mm, WHITE (MARKING "WX-077", BLACK)	1 PC
3	SOCKET CONTACT	3 PCS
2	HOUSING, PA-H-03 2.00mm PITCH, WHITE	1 PC
1	CABLE, 24 AWG x 3C + A, UL 2464, BLACK	A/R
ITEM	DESCRIPTION	Q'TY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PAX1-030024R1A-F56N-LF

SERIES

03 WAY

24 AWG

1423mm

FEMALE

ALUMINUM FOIL

ROUND CABLE

LEADFREE

DESCRIPTION: CABLE ASSEMBLY