



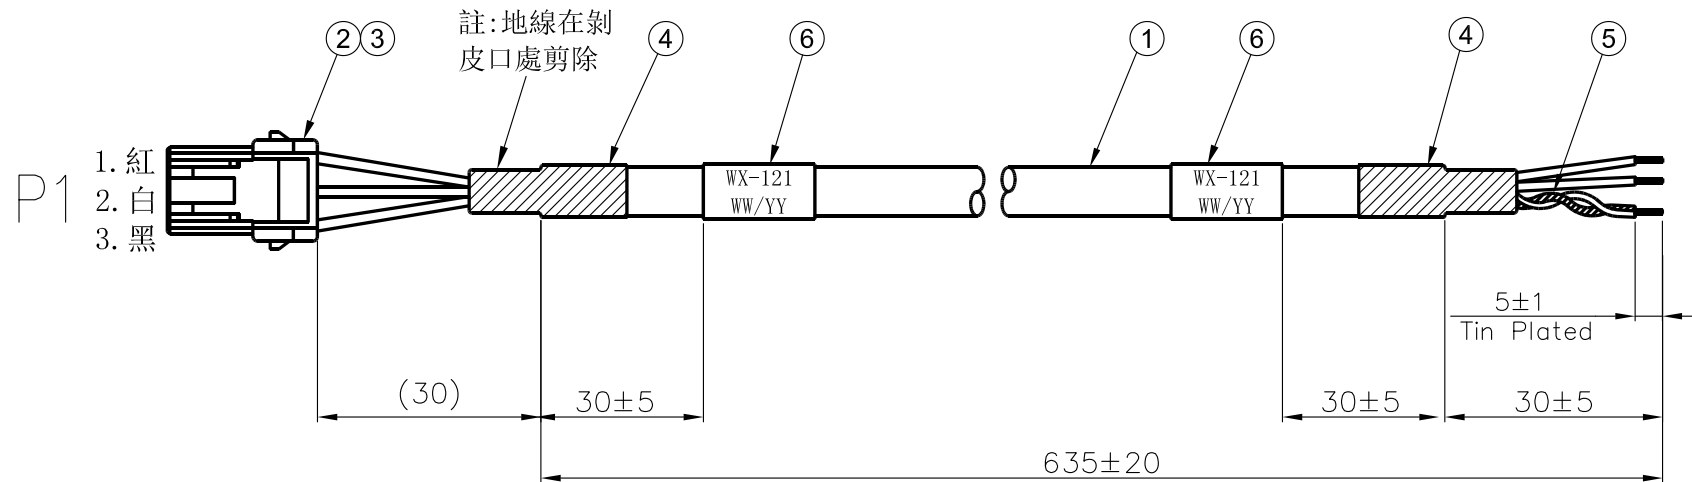

Electrical Properties

- 100% Test(Open Short Miss Wire)
- Contact Resistance: 2Ω Maximum
- Insulation Resistance: 20MΩ Minimum
- Hi-Pot: 300V 10ms

6	LABEL	LABEL WX-121 WW/YY	2PCS
5	H.S.T.	HT-TUBE,OD: 0.8mm,L=25mm	1PCS
4	H.S.T.	HT-TUBE,OD: 5.0mm,L=15mm	2PCS
3	TERMINAL	TERMINAL: Copper PA-T-24	3PCS
2	HOUSING	PITCH: 2.0mm 3POS HOUSING, PA-H-03	1PCS
1	CABLE	UL2464 24AWG*3C+A+D,GRAY,OD: 4.5mm,L=675mm	1PCS
ITEM	PARTS NAME	SPECIFICATION STANDARD	Q'TY



P1	Red	Open
1	White	Open
2	Black	Open
3	Drain	Open
NC		
	PIN	OUT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ±

PPOJECTION



ORDER INFORMATION

PAX1-030024R1AE-Fxxx-LF

SERIES

03 WAY

24 AWG

AL.FOIL+EARTH WIRE

ROUND CABLE

LEADFREE

25N:635mm

42N:107mm

FEMALE

DESCRIPTION:PH2.0mm 3P to Open(5.0) L=660mm UL2464#24x3C+A+D Gray OD4.5mm