
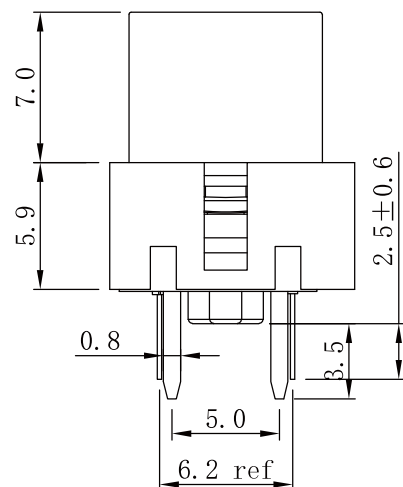
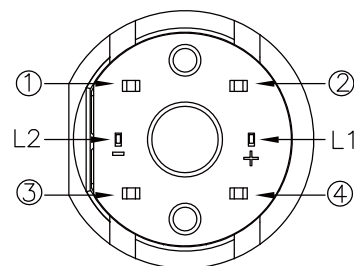
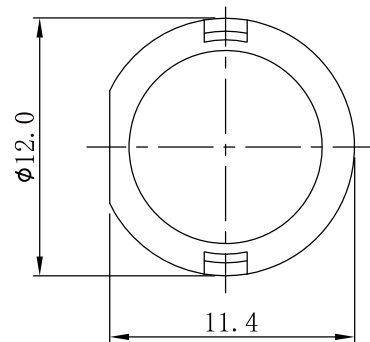
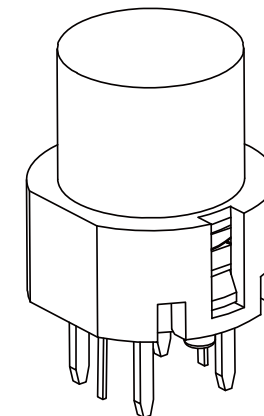


P.C.B.Layout



NOTES:

1. RATING: 35VDC 10mA
2. CONTACT RESISTANCE: 50mΩ Max
3. INSULATION RESISTANCE: 100MΩ 250VDC FOR 1MIN
4. DIELECTRIC STRENGTH: 250VAC (50/60Hz) FOR 1MIN
5. LIFE TEST: 50,000 CYCLES
6. OPERATION FORCE: 200 ± 80g
7. TRAVEL: 0.8 ± 0.5mm
8. TEMPERATUTE: -20° C ~ 70° C

LED COLOR								
RD	YL	GR	BL	WH	PG	YG	RG	RY
Red	Yellow	Green	Blue	White	Pure Green	Yellow Green	Red Green	Red Yellow

8	LED	GaAsP/GaP	1
7	SPRING	SUS	1
6	CONTACT	SUS	1
5	TERMINAL	H65 (C2680)	2
4	CONTACT	C5210	1
3	BUTTON	PC	1
2	MAST	PA66	1
1	CASE	PA66	1
ITEM	PART NAME	MATERIAL	QTY

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS. BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES ±0.20mm.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PBS09RL-D5970xx-200-LF

SERIES

LEADFREE

200g

RD: RED

RY: RED / YELLOW

HIGH 5.9+7.0mm

DIP 180°

DESCRIPTION: