
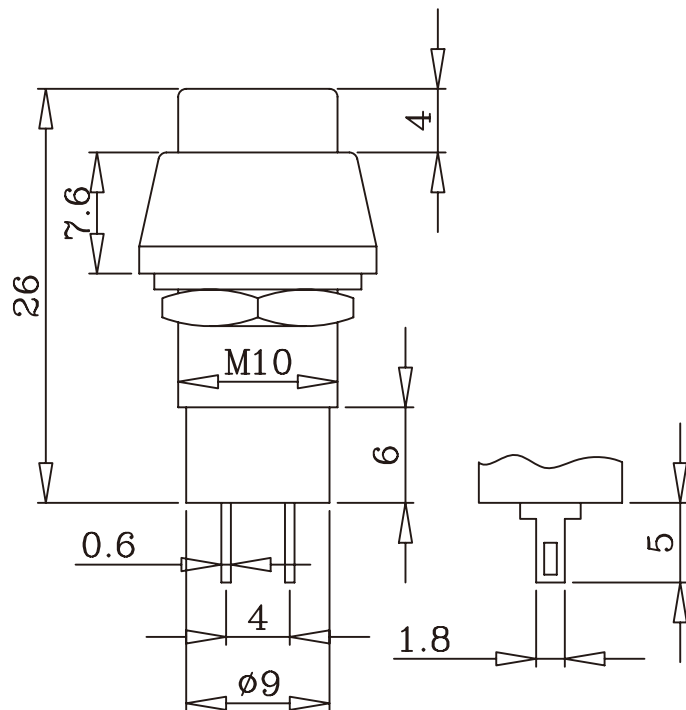


規格 SPECIFICATIONS

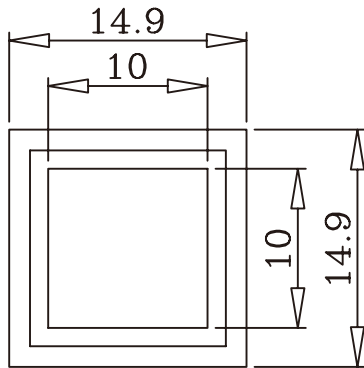

- 迴路
1.CIRCUIT : A: ON-OFF B:(ON)-OFF
- 額定
2.RATING : 1A 125VAC/250VAC
- 接觸電阻
3.CONTACT RESISTANCE : 30mΩ Max
- 絕緣電阻
4.INSULATION RESISTANCE : DC 500V 100MΩ Min
- 耐電壓
5.DIELECTRIC STRENGTH : AC 1000V 1 MINUTE
- 電子壽命
6.ELECTRICAL LIFE : 5000 CYCLE Min
- 機械壽命
7.MECHANICAL LIFE : 10,000 CYCLE Min
- 端子材料
8.TERMINAL MATERIAL : COPPER,ALLOY,(SILVER OR GOLD),PLATED
- 推力
9.PUSH FORCE : >0.3kg
- 按鈕顏色
10.BUTTON COLOR : RED,YELLOW,ORANGE,BLACK,GREEN

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

PBS10-SPBNWxx-1X02-LF

SERIES

LEADFREE

02 WAY

RD:RED YL:YELLOW OR:ORANGE

BK:BLACK GR:GREEN

SOLDER

NUT+WASHER

PANEL BACK

DESCRIPTION: PUSH BUTTON SWITCH

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±