


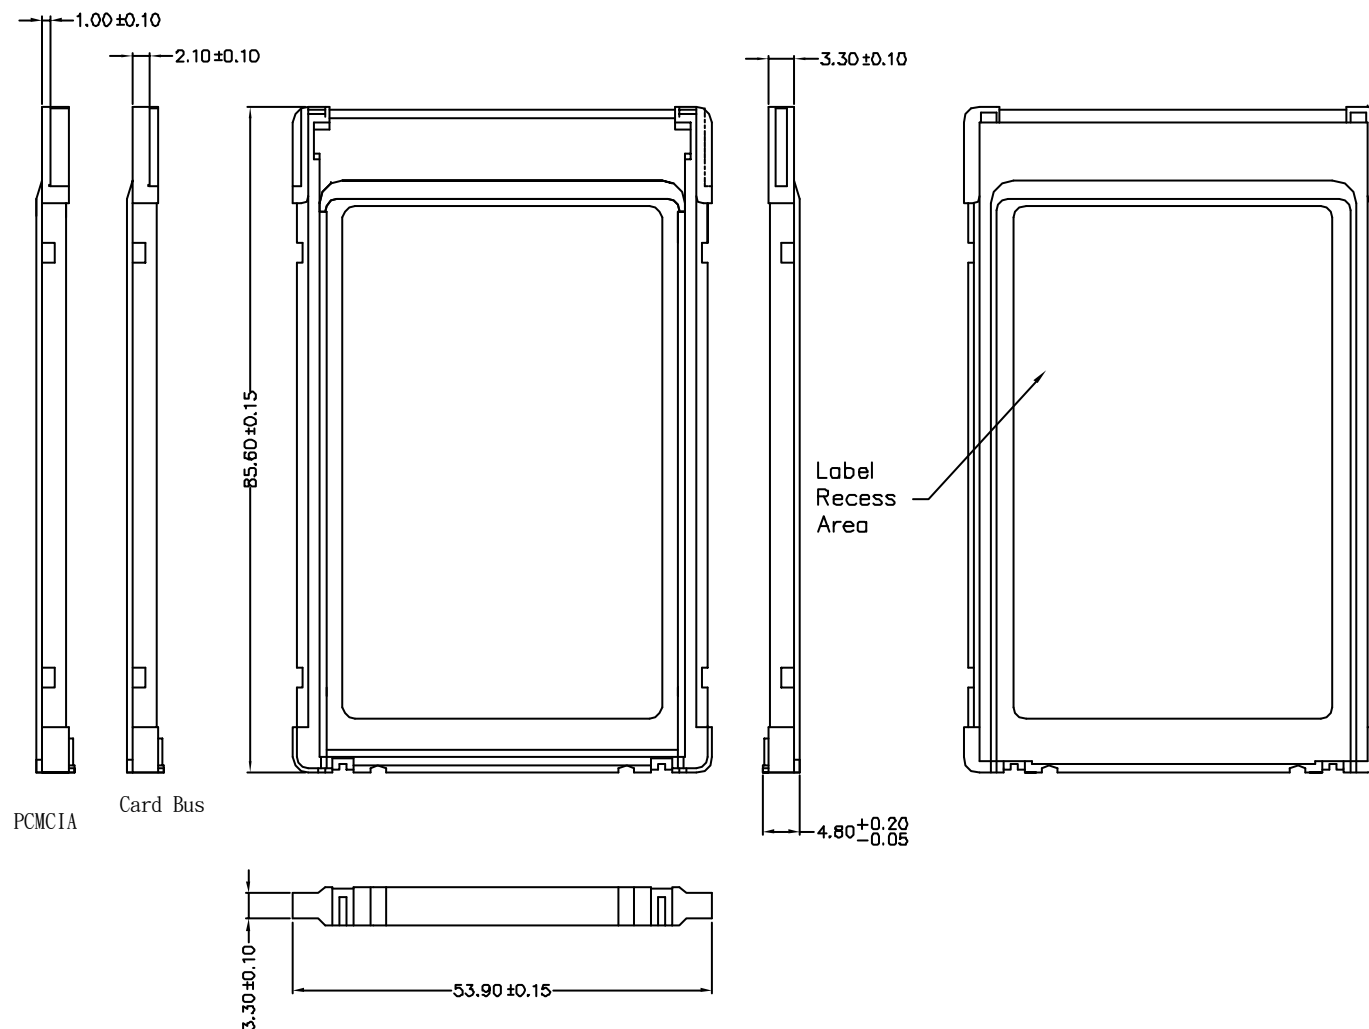

PCMCIA

Card Bus

Note

1. Material:
Metal - Stainless Steel
2. Plastic - Thermoplastic (UL 94V-0)
3. Plastic Color Tolerances: $\Delta E \leq 1.5$

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$


PPOJECTION

照片框

ORDER INFORMATION

PCC-CF04-68-LF
SERIES | T | LEADFREE
09WAY
0.4mm OFFSET
FRAME
CARD

DESCRIPTION: Lower Cover for PC card

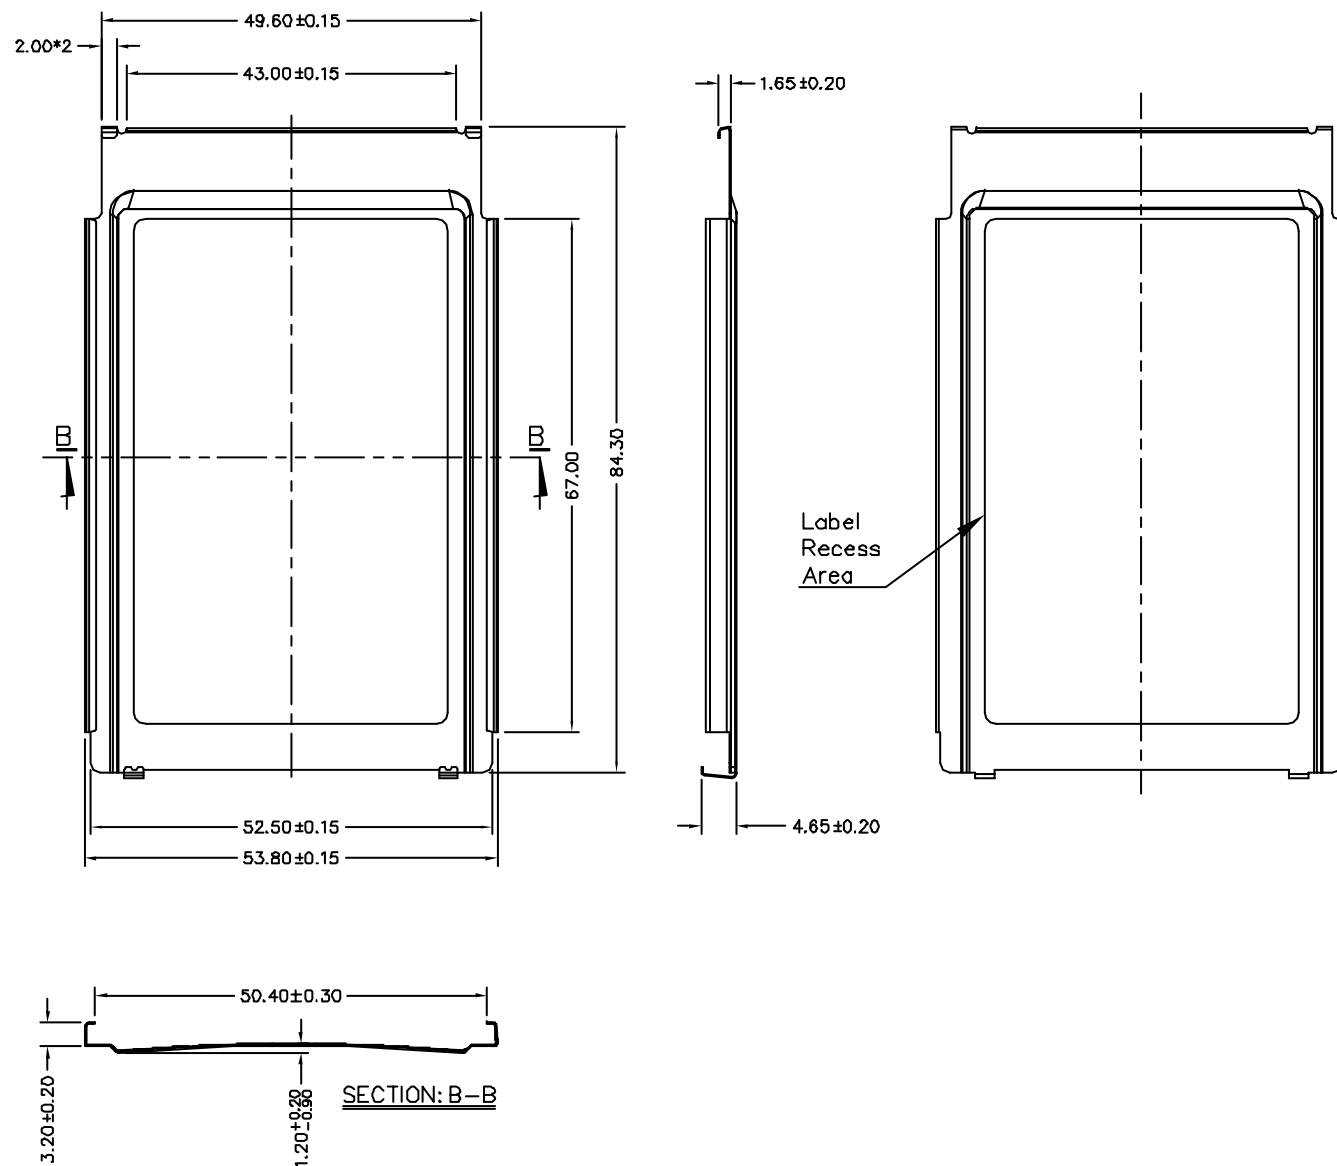

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PCC-CF04-68-LF

SERIES







LEADFREE

09WAY

0.4mm OFFSET

FRAME
CARD

DESCRIPTION: Top Cover for PC card

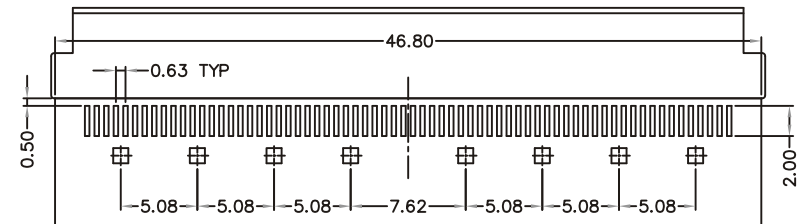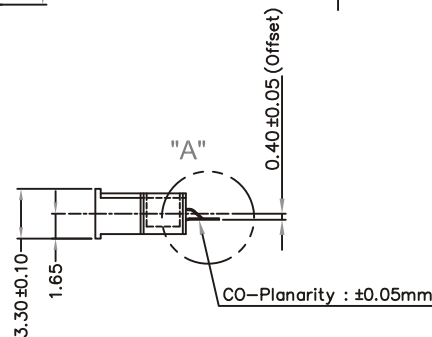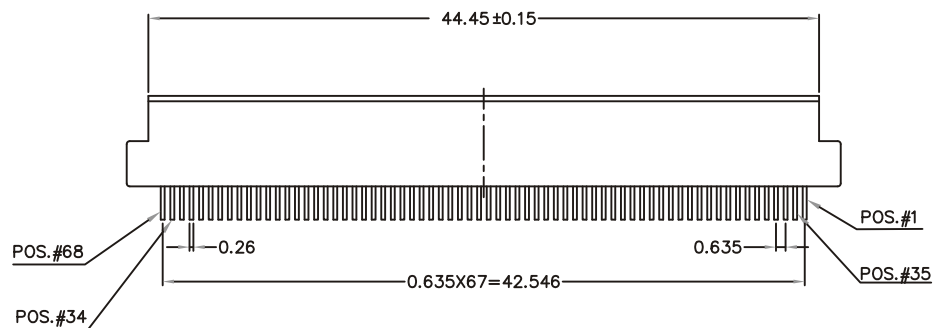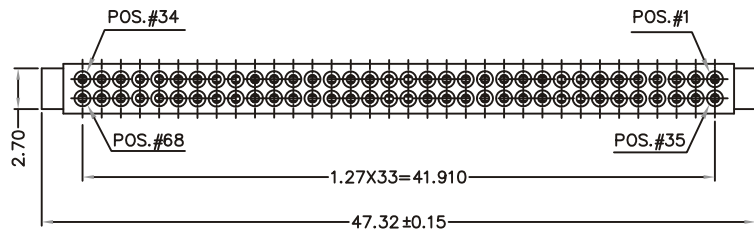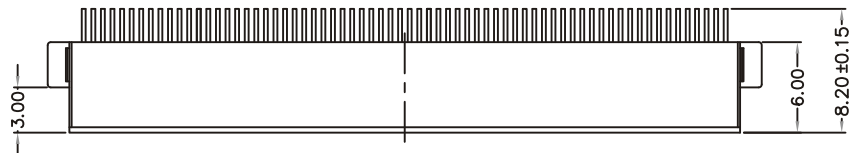

Recommend PCB Layout

Note

1.Material:

Contact—Copper Alloy
Grounding Plate—Copper Alloy
Housing— High Temp Thermoplastic
LCP (UL 94V-0)

2.Plating:

Underplate : 30u"(0.76um)Nickel
Solder Tails : 100u"(2.54um)Tin

3.Electrical:

Current Rating : 0.5A

Insulation Resistance : $>1 \times 10^9$ ohm at 500 Vdc
 $>1 \times 10^8$ ohm at 500 Vdc
after Environmental Conditioning

Withstanding Voltage : 500 Vrms at Sea Level

4.Environmental:

Temperature Rating : -10°C to +70°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCC-CF04-68-LF
SERIES | | LEADFREE
| | 09WAY
| | 0.4mm OFFSET
| | FRAME
| | CARD

DESCRIPTION: