


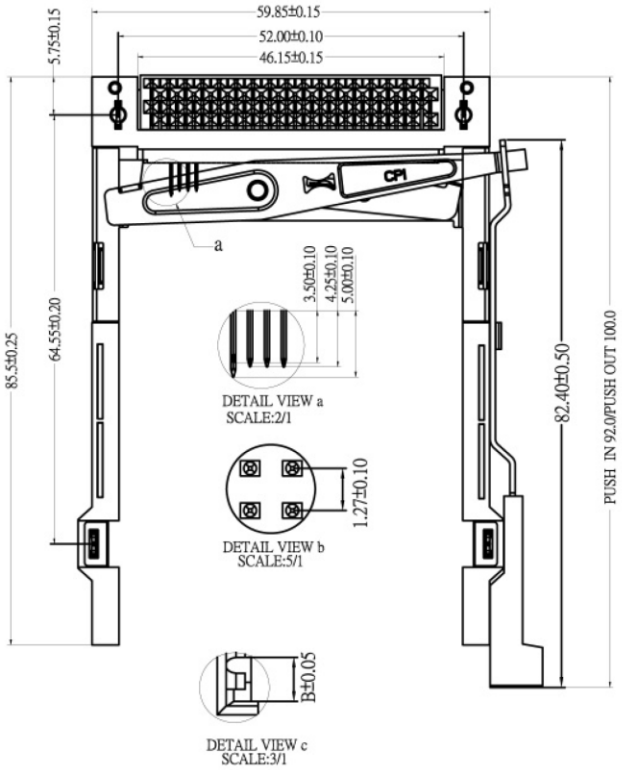


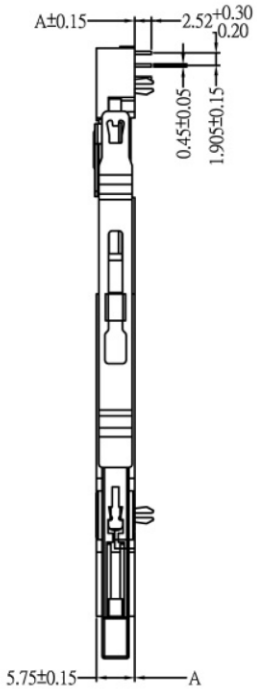

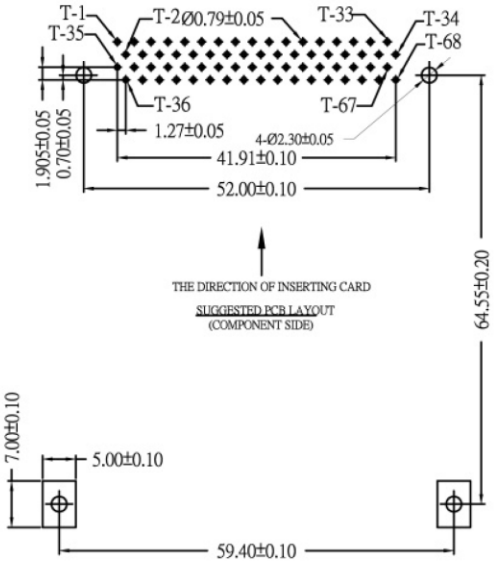

MATERIAL:
INSULATOR: PBT UL94V-0 BLACK
CONTACTS:COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL.
GUIDE/PUSH BUTTON: PBT,UL94V-0/STAINLESS STEEL

ELECTRICAL:
CURRENT RATING: 0.5A AC, DC
TEMPERATURE RANGE: -40˚C ~ +85˚C
INSULATION RESISTANCE:1000MΩ MIN.(500V DC)
CONTACT RESISTANCE: 40mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC/MINUTE

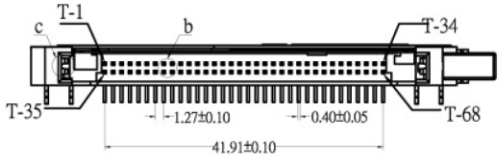

Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

Ordering Information

A \ B	DIM. B = 1.1 mm (0) Voltage 5V	DIM. B = 2.2 mm (V) Voltage 3.3V
(0) A = 0.0mm	PCC-PRL00V5ZRS-68	PCC-PRL00V3ZRS-68

RoHS Compliant

MORETHANALL PCB CONNECTORS Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PCC-PRL00VxZRS-68-LF

- SERIES
- MALE
- DIP 90°
- LONG RAIL
- STANDOFF 0.0mm
- CLIP
- V3:3.3V
- V5:5V
- RIGHT STRAIGHT
- 68WAY
- LEADFREE

DESCRIPTION: