
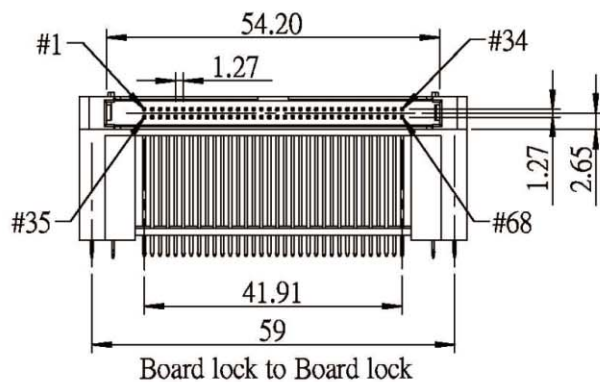
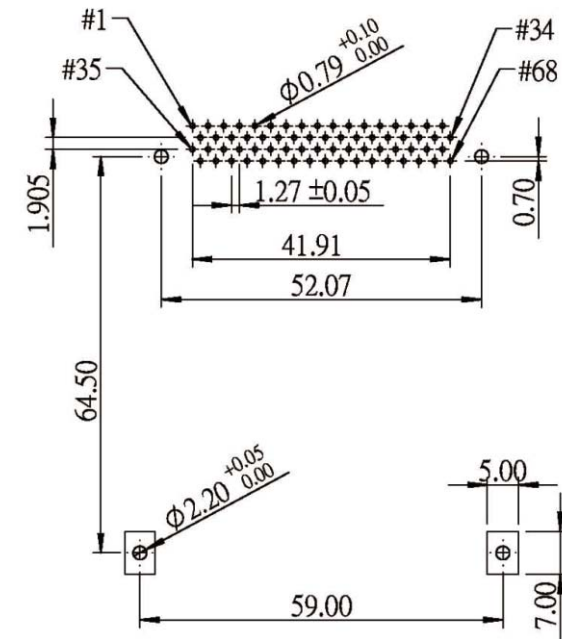

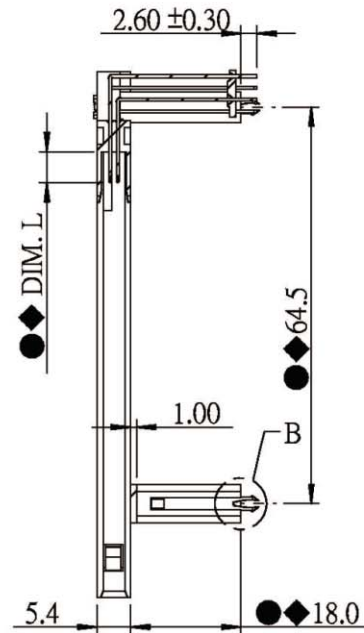


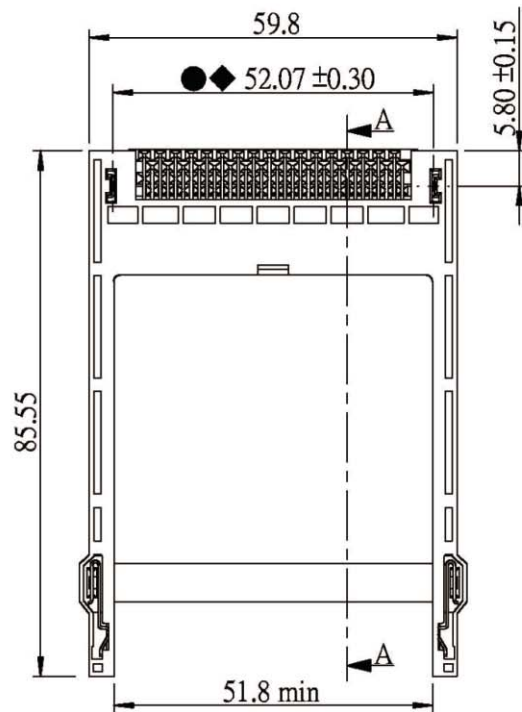

NOTE:

1. INSPECTION SYMBOL:

● : MANUFACTURER INSPECTION

◆ : Q.C INSPECTION

2. PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.

TABLE 1

3. VOLTAGE 3.3V

PCB LAYOUT : COMPONENT SIDE
PCB THK. 1.60±0.10

PIN TYPE	DIM. L ±0.20	PIN NUMBER
DETECT	3.50 mm	36 , 67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	1, 17, 34, 35, 51, 68

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

PCC-PRL180V3-68-LF

SERIES | | | | LEADFREE
MALE | | | | 68WAY
| | | | 3.3V
| | | | STANDOFF 18.0mm
| | | | LONG RAIL
| | | | DIP 90°

DESCRIPTION: