



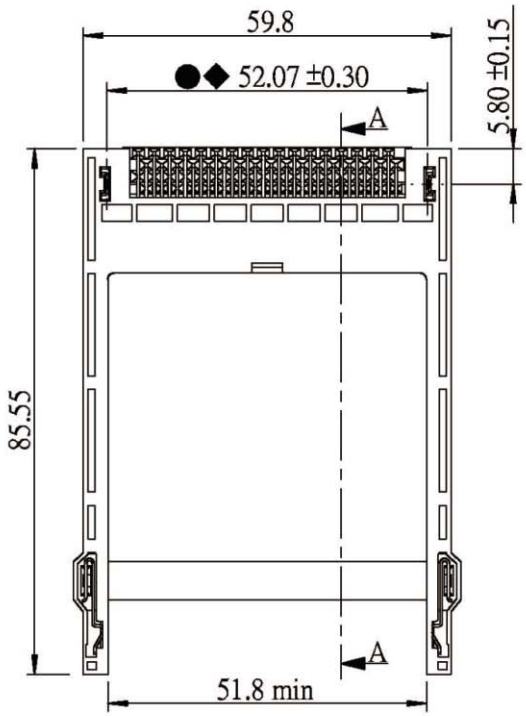


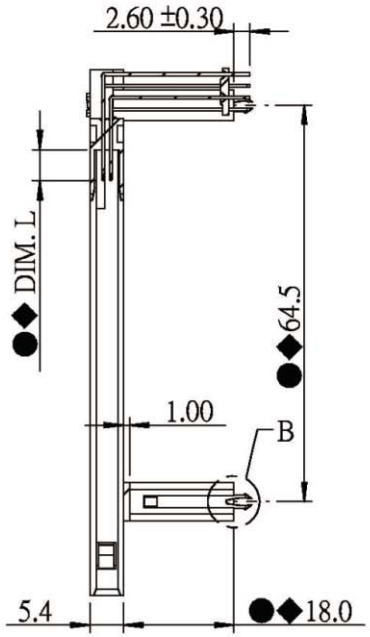



B (2 : 1)

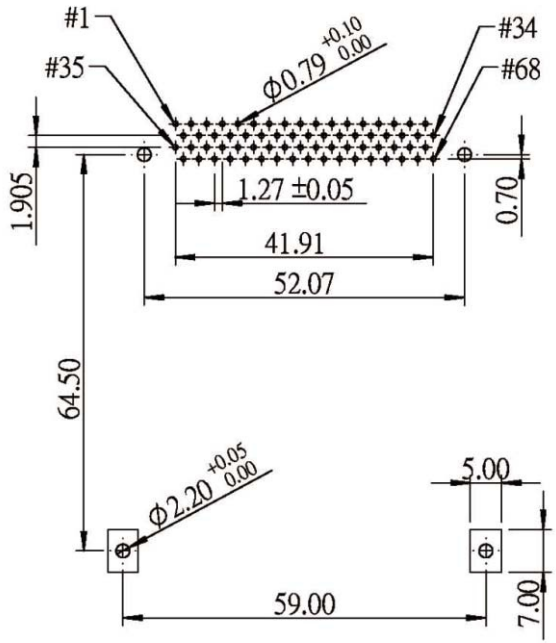

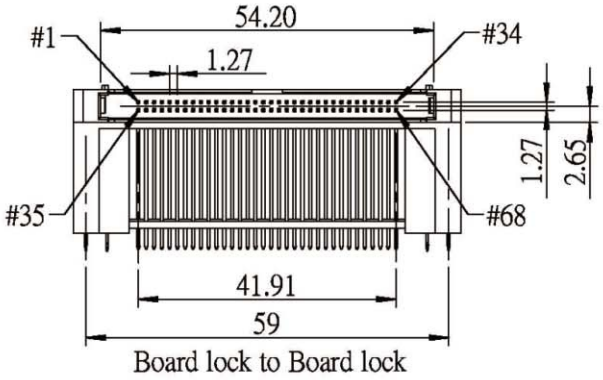

Board lock to Board lock

NOTE:
1. INSPECTION SYMBOL:
   ● : MANUFACTURER INSPECTION
   ◆ : Q.C INSPECTION
2. PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.
   TABLE 1
3. VOLTAGE 3.3V

PCB LAYOUT : COMPONENT SIDE
PCB THK. 1.60 ±0.10

PIN TYPE	DIM. L ±0.20	PIN NUMBER
DETECT	3.50 mm	36 , 67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	1, 17, 34, 35, 51, 68

RoHS Compliant

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE
X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°



ORDER INFORMATION

PCC-PRL180V3Z-68-LF
SERIES
MALE
DIP 90°
LONG RAIL
STANDOFF 18.0mm
3.3V
CLIP
68 WAY
LEADFREE

DESCRIPTION: