

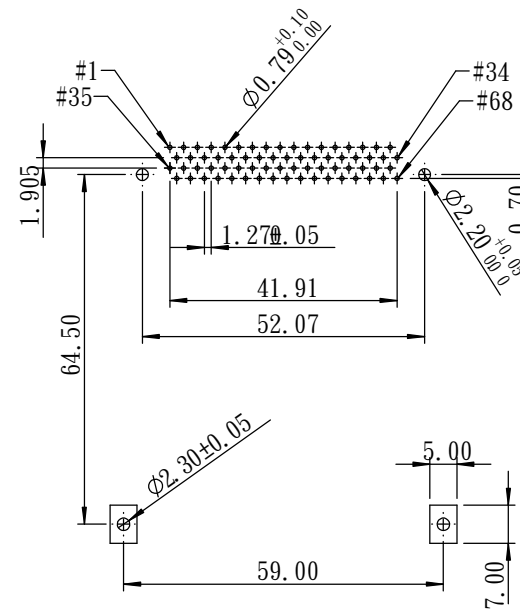
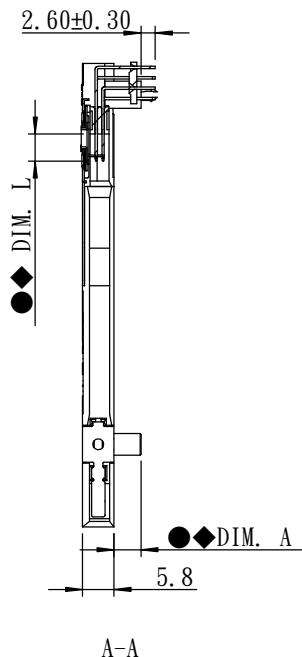


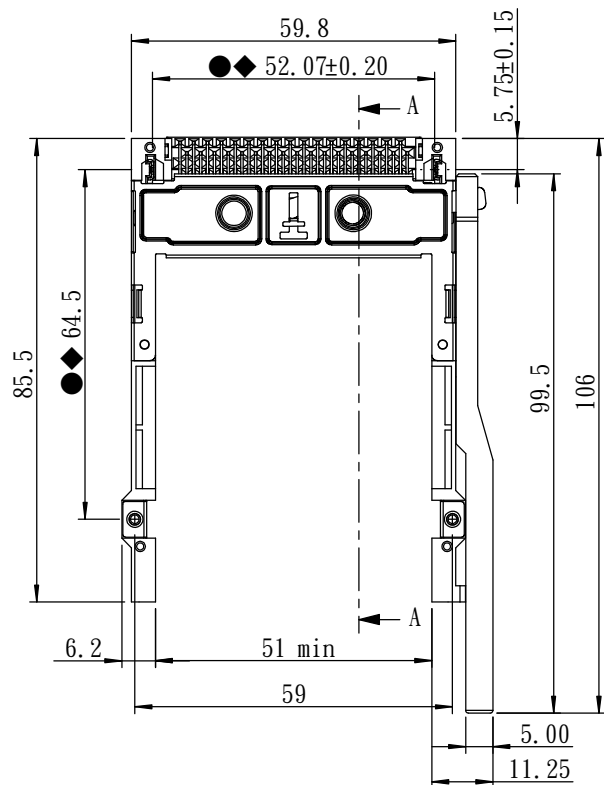

PCB LAYOUT : COMPONENT SIDE
PCB THK. 1.60±0.10

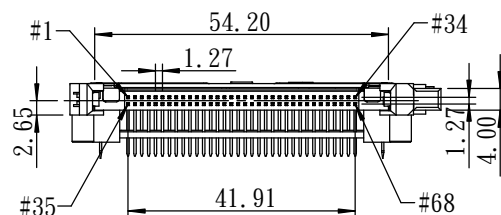

NOTE:

1. INSPECTION SYMBOL:

● : MANUFACTURER INSPECTION

◆ : Q.C INSPECTION

2. PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.

TABLE 1

3. VOLTAGE 3.3V

4. HSF CONCAFT LEVEL 1

PIN TYPE	DIM. L ±0.20	PIN NUMBER
DETECT	3.50 mm	36 , 67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	1, 17, 34, 35, 51, 68

PART NO.	DIM. A ±0.20
PCC-PRL50V3RS-68	5.00

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCC-PRL50V3RS-68-LF

SERIES MALE DIP 90°
LEADFREE 68WAY
RIGHT STRAIGHT
3.3V
STANDOFF 5.0mm
LONG RAIL

DESCRIPTION: PCMCIA ASSEMBLY