

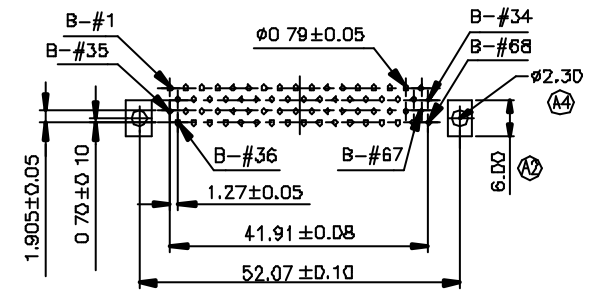



A-A' SECTION


| TYPE    | CONTACT NO.      | L    |
|---------|------------------|------|
| DETECT  | 36 ,67           | 3 5  |
| GENERAL | OTHERS           | 4 25 |
| POWER   | 1,17,34,35,51,68 | 5.0  |

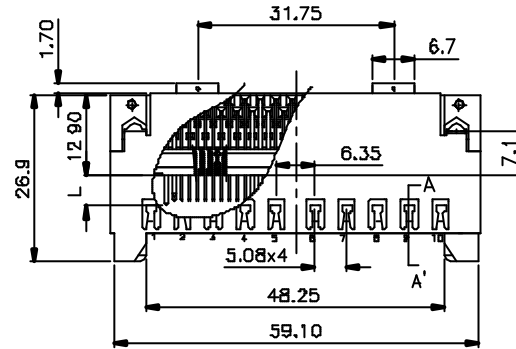



P.C.Board Layout



A VIEW  
S=2/1  
FOR 3.3 V



A VIEW  
S=2/1  
FOR 5.0 V

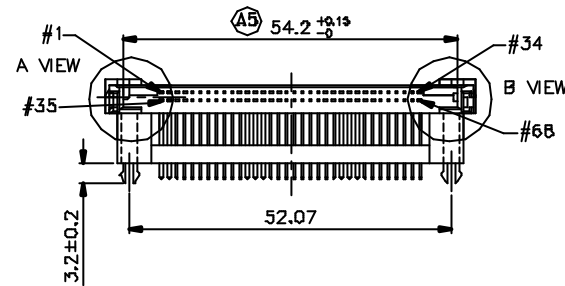

B VIEW  
S=2/1

| H  | Dimension |
|----|-----------|
| 00 | 0.00mm    |
| 20 | 2.00mm    |
| 28 | 2.80mm    |
| 40 | 4.00mm    |
| 50 | 5.00mm    |
| 60 | 6.00mm    |
| 22 | 2.20mm    |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

照片框

ORDER INFORMATION

PCC-PRNxxVxM-68-LF

SERIES

MALE

DIP 90°

SMALL RAIL

LEADFREE

68 WAY

METAL

V3:3.3V

V5:5.0V

20.28.40.50.80.22 mm HIGH

DESCRIPTION: PCMCIA CONNECTOR SHORT TYPE