
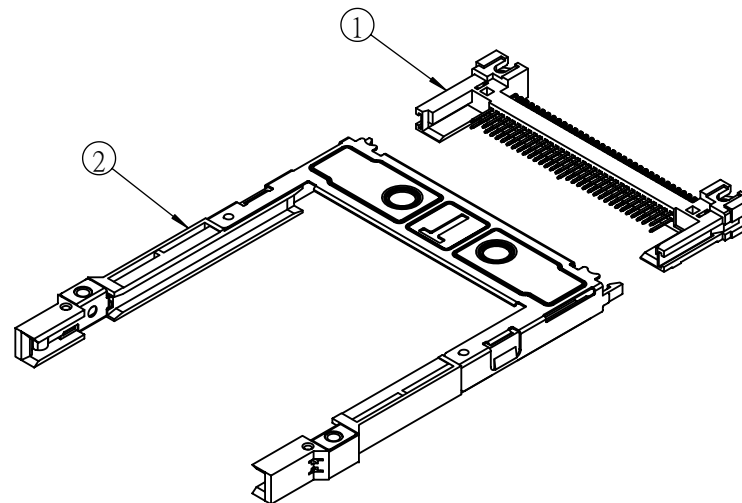
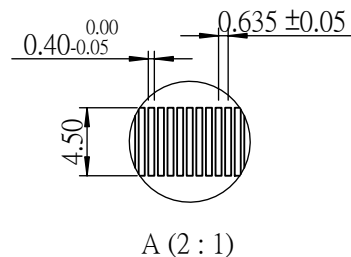


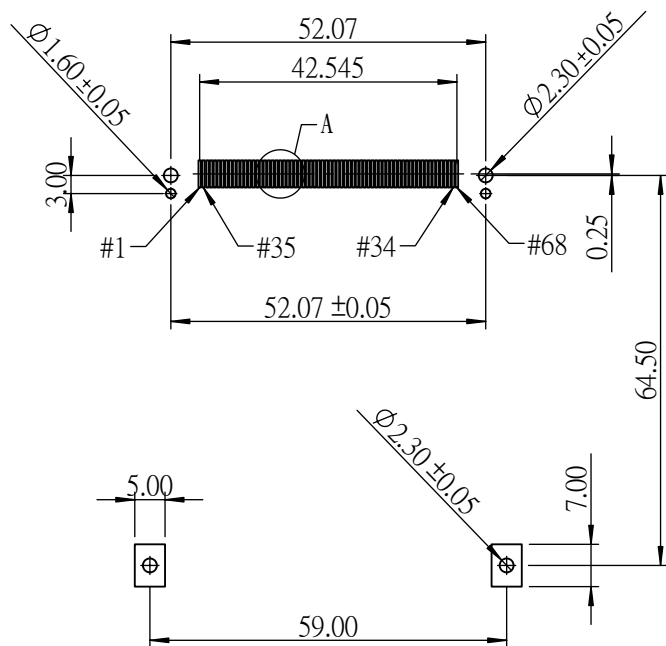

PCB LAYOUT : COMPONENT SIDE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±



PPOJECTION

照片框

ORDER INFORMATION

PCC-PWL00V5-68-LF
SERIES MALE 5.0V STAND OFF 0.0mm LONG RAIL 90°SMT
LEADFREE 68WAY

DESCRIPTION:

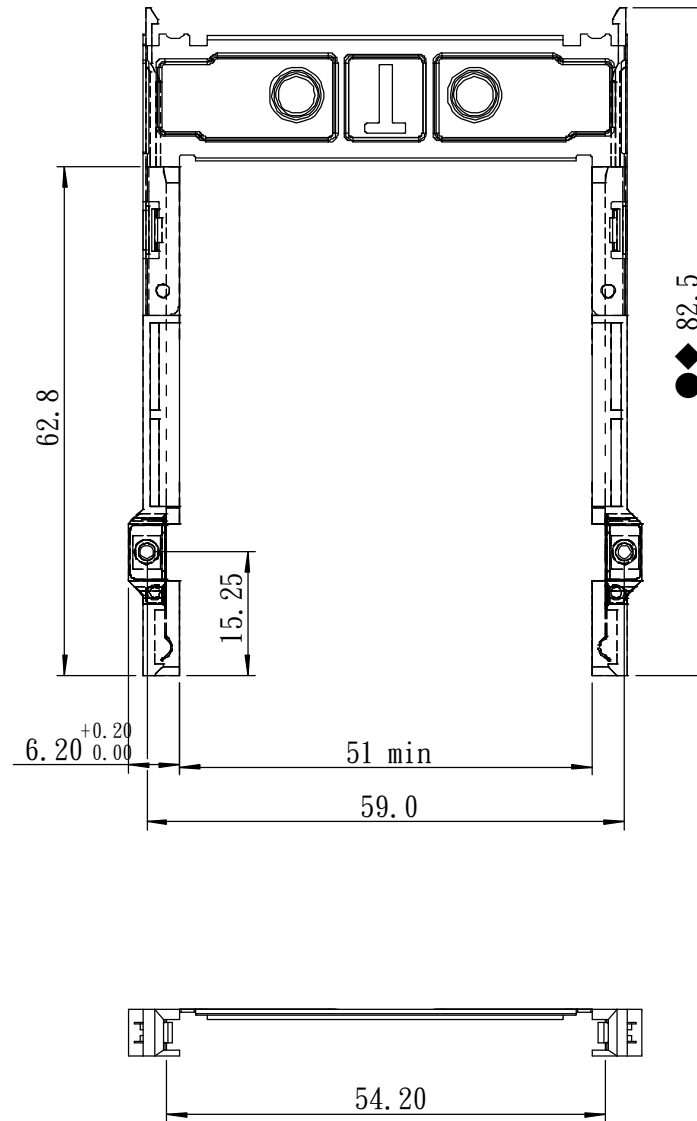

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION







ORDER INFORMATION

PCC-PWL00V5-68-LF
SERIES MALE 5.0V STAND OFF 0.0mm LONG RAIL 90°SMT LEADFREE 68WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION:

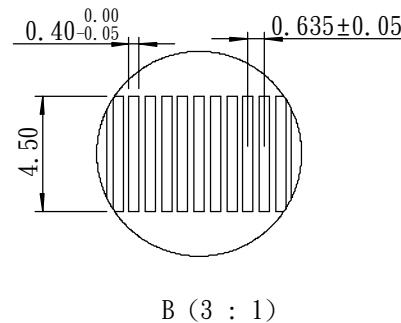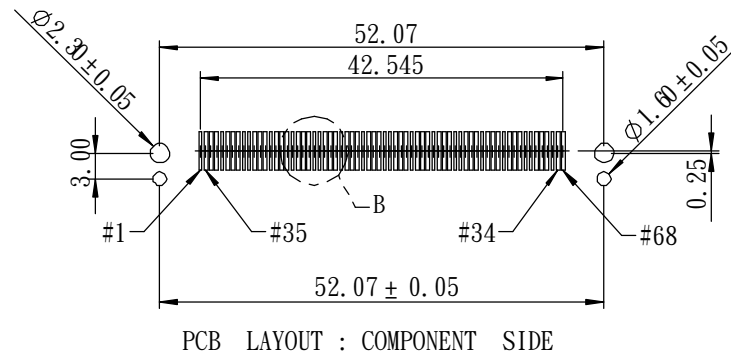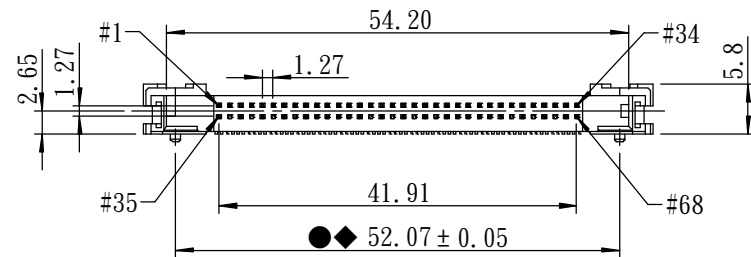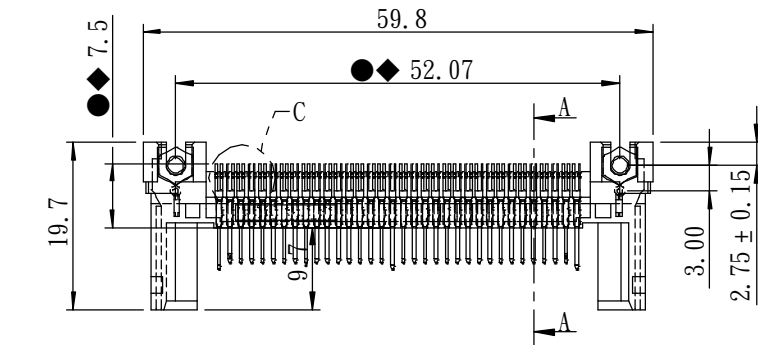

NOTE:

1. SOLDER TAIL TO BE WITHIN 0.05 UPWARD AND 0.2 DOWNWARD FROM Z-DATUM PLACE, AND COPLANALITY OF SOLDER TAILS TO BE WITHIN 0.12. MEASUREMENT POINT IS SOLDER TAIL'S TIP.
2. INSPECTION SYMBOL:
 ● : MANUFACTURER INSPECTION
 ◆ : Q.C INSPECTION
3. PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.

PIN TYPE	DIM. L ±0.20	PIN NUMBER
DETECT	3.50 mm	36 , 67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	1, 17, 34, 35, 51, 68

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PCC-PWL00V5-68-LF
 SERIES MALE 5.0V STAND OFF 0.0mm LONG RAIL 90°SMT
 LEADFREE 68WAY

DESCRIPTION: