

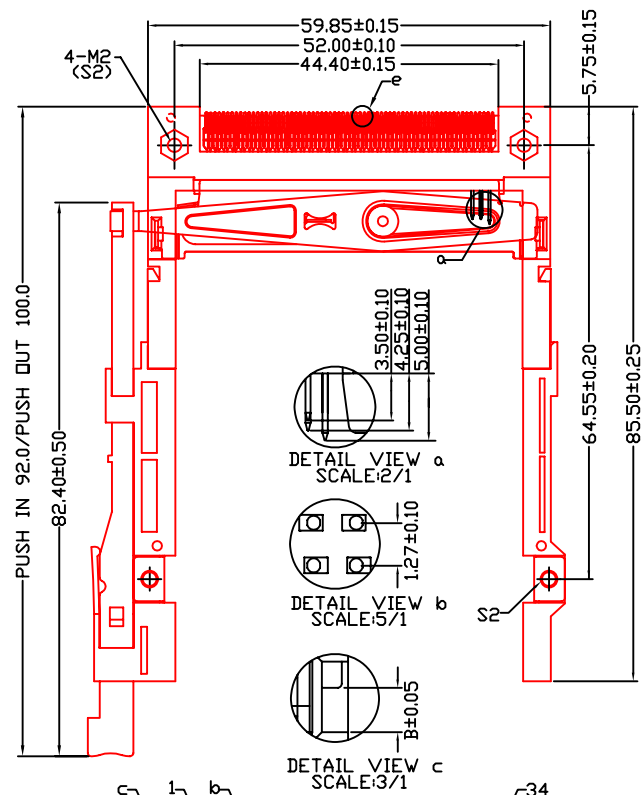


THE DIRECTION OF INSERTING CARD
RECOMMENDED UPPER BOARD PCB LAYOUT

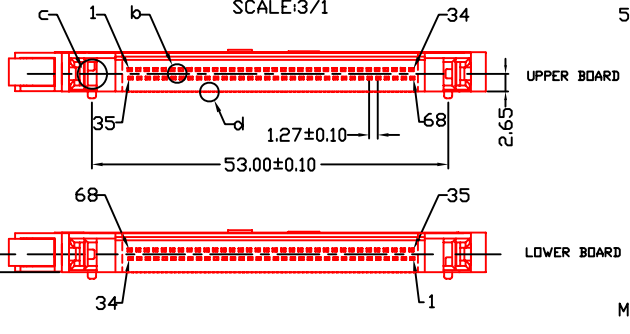

Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

B	1.1MM	2.2MM
voltage	5V	3.3V



MATERIAL :
INSULATOR : LCP ,UL94V-0
COLOR : BLACK
CONTACT : BRASS
GUIDE/PUSH BUTTON: PBT,UL94V-0

PLATING :
CONTACT AREA : GOLD FLASH,5U" GOLD,
15U" GOLD
UNDER PLATING : NICKEL OVERALL
SOLDER TAIL AREA : TIN

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE
SIZE A4 PPROJECTION

X, ±
.X ± 0.05
.XX ± 0.01
.XXX ± 0.002
ANG ±

照片框

ORDER INFORMATION

PCC-PWL00VxLS-68-LF
SERIES LEADFREE
68WAY
LEFT STRAIGHT
MALE V3:3.3V
90°SMT V5:5.0V
LONG RAIL STAND OFF 0.0mm

DESCRIPTION:PCMCIA 68PIN HEADER SMT TYPE WITH EJECTION BAR

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com