
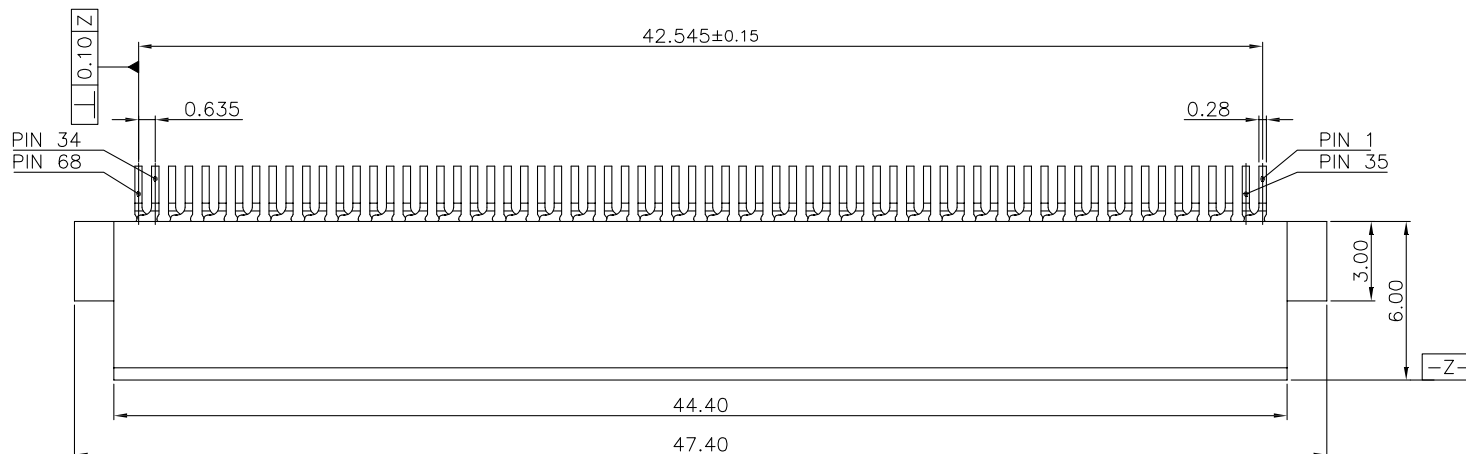


- NOTES:
- MATERIAL:
 - HOUSING: THERMOPLASTIC; COLOR IN BLACK, UL94V-0 RATED.
 - CONTACT AND GROUNDING LUG: HIGH PERFORMANCE COPPER ALLOY. THICKNESS=0.10mm.
 - CONTACT FINISH: UNDERPLATING NICKEL 50u" OVERALL. SELECTED GOLD ON CONTACT AREA. (SEE TABLE A) SELECTED LEAD FREE TIN 120u" ON SOLDER TAIL.
 - PACKING: SEE TABLE A.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.40

.X ± 0.30

.XX ± 0.15

.XXX ±

ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

PCC-SWA00-68-LF

SERIES
LEADFREE
68WAY
OFFSET 0.0mm
A TYPE
90°SMT
FEMALE

DESCRIPTION: