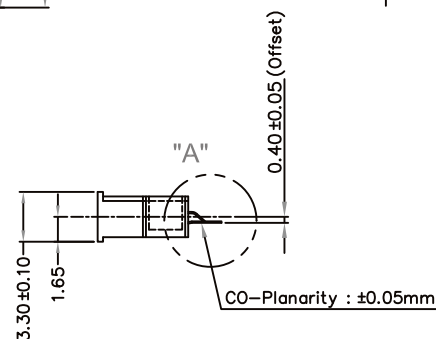
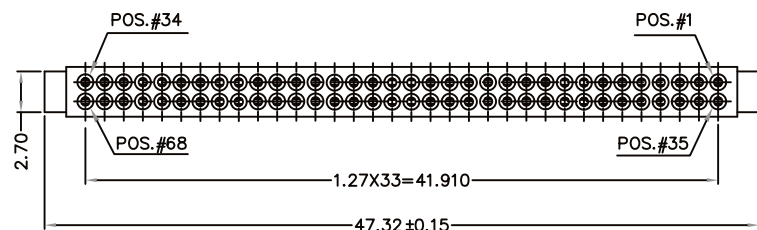
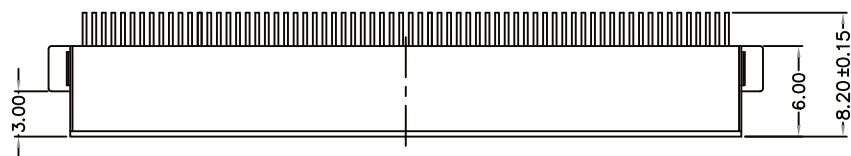


Recommend PCB Layout

Note

1.Material:

Contact—Copper Alloy
Grounding Plate—Copper Alloy
Housing— High Temp Thermoplastic
LCP (UL 94V-0)

2.Plating:

Underplate : 30u"(0.76um)Nickel
Solder Tails : 100u"(2.54um)Tin

3.Electrical:

Current Rating : 0.5A

Insulation Resistance : $>1 \times 10^9$ ohm at 500 Vdc


$>1 \times 10^8$ ohm at 500 Vdc

after Enviromental Conditioning


Withstanding Voltage : 500 Vrms at Sea Level

4.Enviromental:

Temperature Rating : -10°C to +70°C



DETAIL "A"
S=5:1

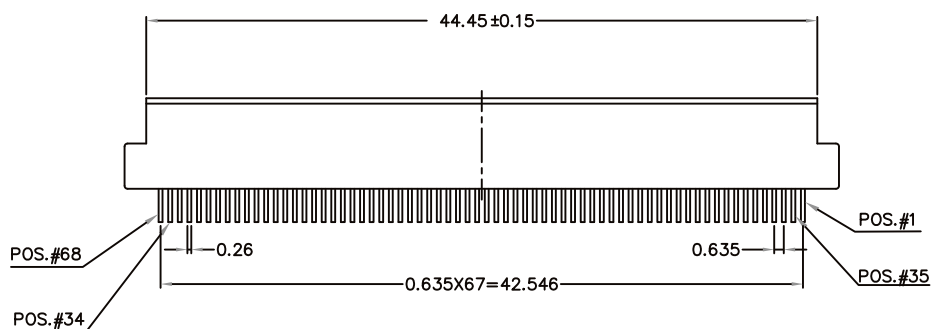

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

TOLERANCES ARE

X, ±
.X, ±
.XX, ±
.XXX, ±
ANG, ±

PPOJECTION



ORDER INFORMATION

PCC-SWA04-68-LF

SERIES | | | | LEADFREE
68WAY
OFFSET 0.4mm
A TYPE
90°SMT
FEMALE

DESCRIPTION: PC Card 68 pin connect