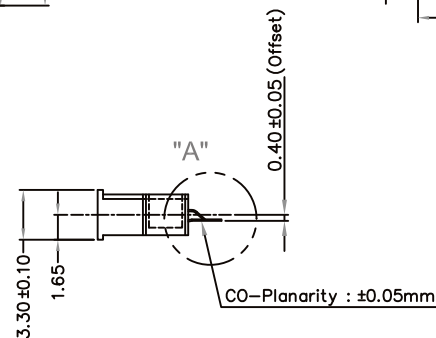
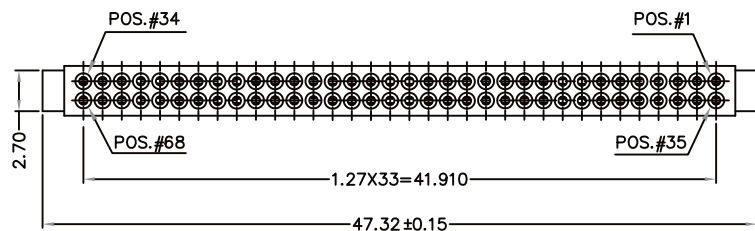
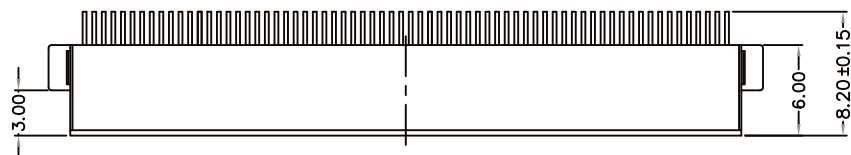


Recommend PCB Layout

Note

1.Material:

Contact—Copper Alloy
Grounding Plate—Copper Alloy
Housing— High Temp Thermoplastic
LCP (UL 94V-0)

2.Plating:

Underplate : 30u"(0.76um)Nickel
Solder Tails : 100u"(2.54um)Tin

3.Electrical:

Current Rating : 0.5A

Insulation Resistance : $>1 \times 10^9$ ohm at 500 Vdc


$>1 \times 10^8$ ohm at 500 Vdc

after Enviromental Conditioning


Withstanding Voltage : 500 Vrms at Sea Level

4.Enviromental:

Temperature Rating : -10°C to +70°C



DETAIL "A"
S=5:1

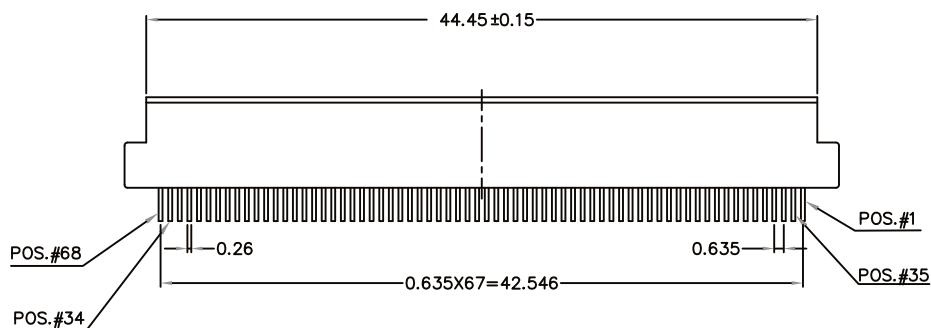

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION





ORDER INFORMATION

PCC-SWA04M-68-LF

SERIES | | | | LEADFREE
68WAY
METAL
OFFSET 0.4mm
FEMALE | A TYPE
90°SMT

DESCRIPTION: PC Card 68 pin connect

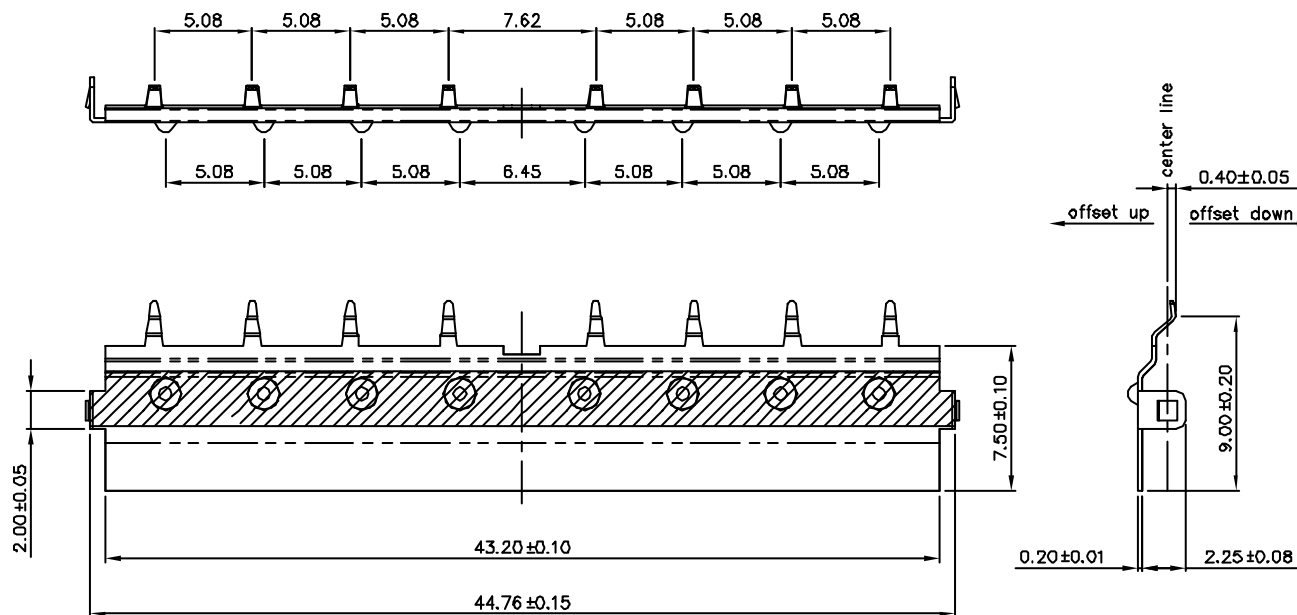

Note

1.Material:

Metal- Copper Alloy

2.Plating:

Underplate : 50u"(1.25um) Nickel

Solder Tails : 100u"(2.54um) Tin without leac

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±


.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

PCC-SWA04M-68-LF
SERIES | | | | LEADFREE
68WAY
METAL
OFFSET 0.4mm
FEMALE | A TYPE
90°SMT

DESCRIPTION: Card Bus Clip