



RECOMMENDED P.C.B LAYOUT

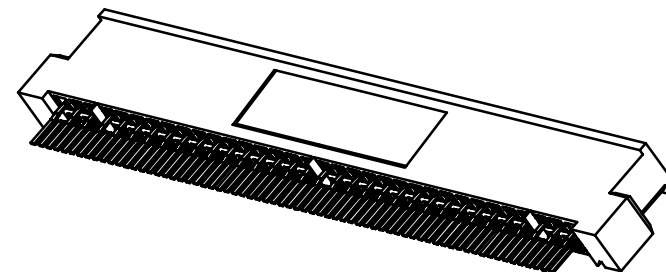

NOTES :

- 1.ELECTRICAL :
VOLTAGE : 100V
CURRENT : 0.5A
CONTACT RESISTANCE : 40M Ω MAX
DIELECTRIC WITHSTANDING : 500V AC
INSULATION RESISTANCE : 1000M Ω MIN
- 2.MECHANICAL :
CONTACT RETENTION TO HOUSING : 4.9N MIN
MATING FORCE : 39.2N MAX
UNMATING FORCE : 6.67N MIN
DURABILITY : 10,000 CYCLES
- 3.MATERIAL :
INSULATOR : LCP
COLOR : BLACK
CONTACT : PHOSPHOR BRONZE
- 4.PLATING :
CONTACT AREA : GOLD OVER NICKEL
SOLDER TAIL AREA : TIN OR GOLD

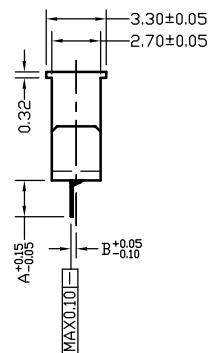

附表一

尺寸 代碼	DIM A	DIM B
03	2.00	0.30
04	2.20	0.40

附表二

代碼	電鍍方式
A	純錫半金
B	全金
D	霧錫半金
E	錫銅半金

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.20
.XX $\pm$ 0.10
.XXX $\pm$
ANG $\pm$

PPOJECTION

ORDER INFORMATION

PCC-SWaxx-68-LF

SERIES
LEADFREE
68WAY
03: OFFSET 0.3mm
04: OFFSET 0.4mm
FEMALE
A TYPE
90°SMT

DESCRIPTION: PC母座SMT式大耳有擋片上插式孔無接地槽偏移XX針長XX成品(邊0.32)