

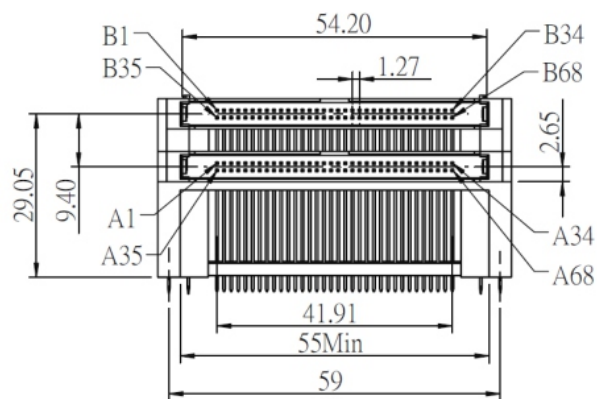

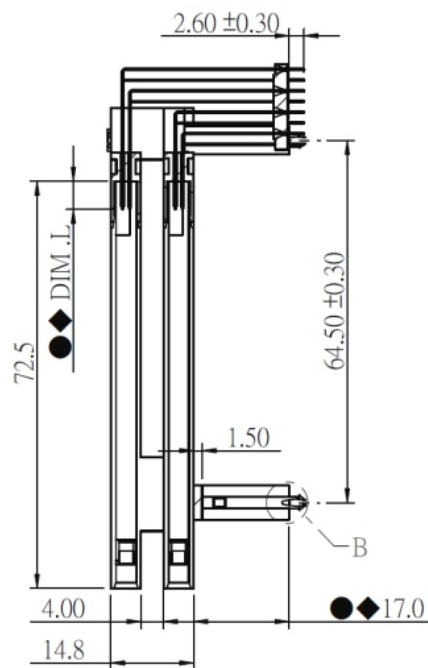


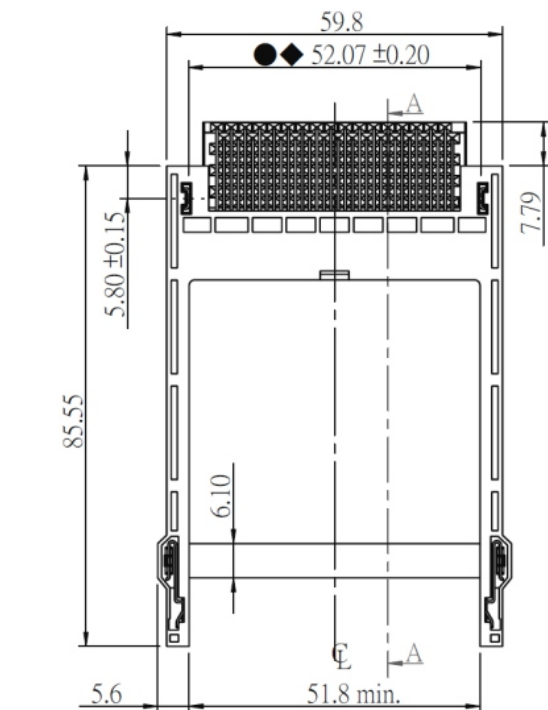

A-A

PIN TYPE	DIM. L ± 0.20	PIN NUMBER
DETECT	3.50 mm	A36,A67,B36,B67
GENERAL	4.25 mm	THE REST
POWER	5.00 mm	A1,A17,A34,A35,A51,A68 B1,B17,B34,B35,B51,B68

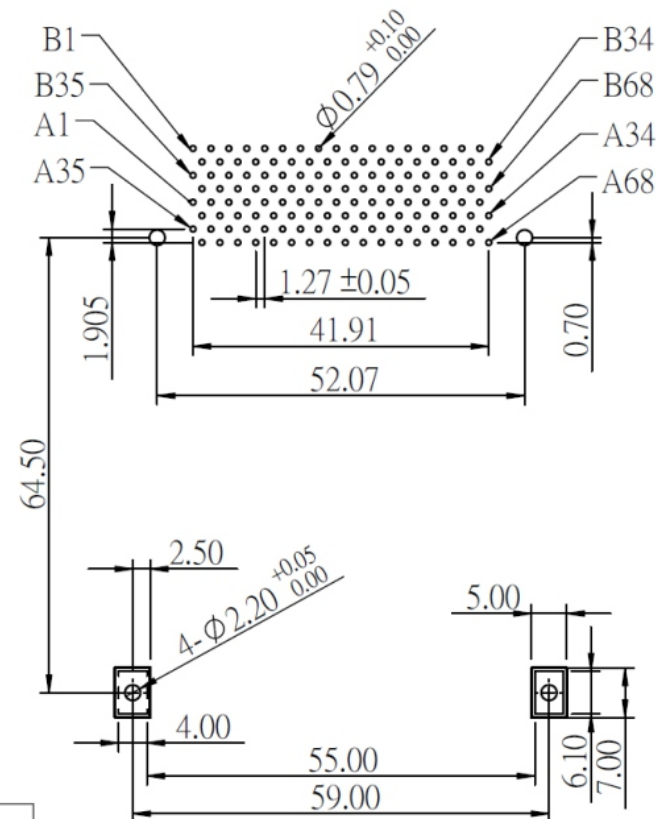

PCB LAYOUT

- NOTE:
- INSPECTION SYMBOL:
 ● : MANUFACTURER INSPECTION
 ◆ : Q.C INSPECTION
 - VOLTAGE 5V
 - PLEASE REFER TO TABLE 1 FOR TERMINAL LENGTH.
TABLE 1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.20

.XX ± 0.10

.XXX ± 0.05

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PCCB1-PRL170V5-68-LF

SERIES | | | | LEADFREE
MALE | | | | 68WAY
5.0V
STANDOFF 17.0mm
LONG RAIL
DIP 90°

DESCRIPTION: