

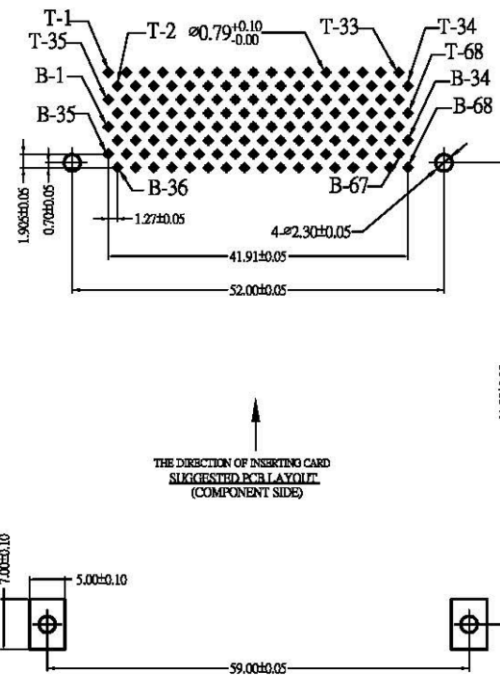
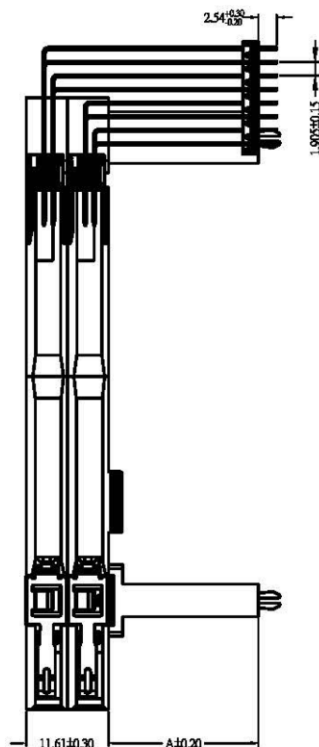
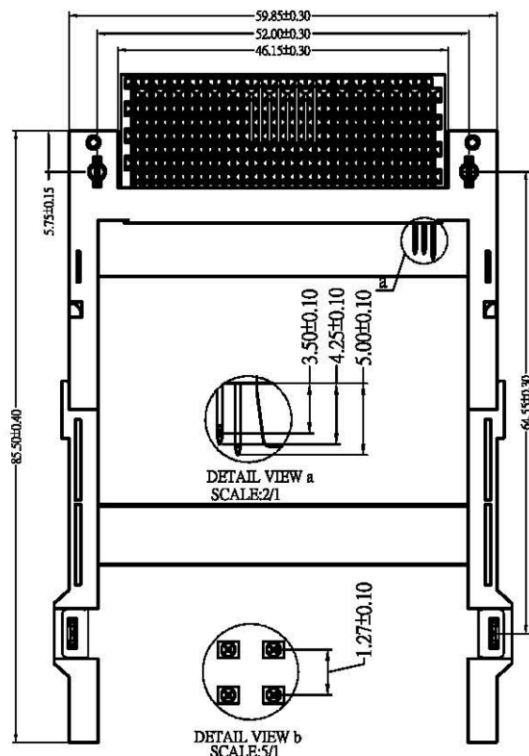




MATERIAL:
INSULATOR: PBT UL94V-0 BLACK
CONTACTS: COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL.
GUIDE: PBT, UL94V-0

ELECTRICAL:
CURRENT RATING: 0.5A AC, DC
TEMPERATURE RANGE: -20°C ~ +60°C
INSULATION RESISTANCE: 1000MΩ MIN. (500V DC)
CONTACT RESISTANCE: 40mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC/MINUTE

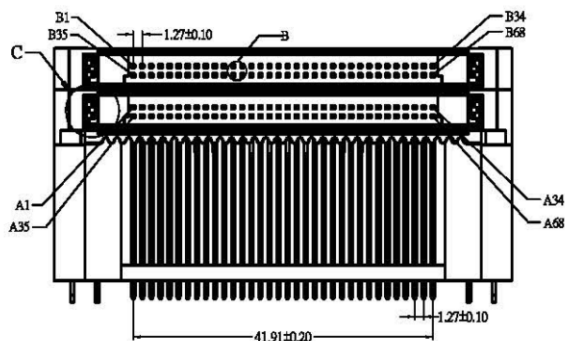

Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

Ordering Information

	B	DIM. B = 1.1 mm (V) Voltage 5V	DIM. B = 2.2 mm (V) Voltage 3.3V
A			
(C) A=21.0mm	PCCB1-PRL210V5-68	PCCB1-PRL210V3-68	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X, ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PCCB1-PRL210Vx-68-LF

SERIES

LEADFREE

MALE
DIP 90°

68WAY
V3:3.3V
V5:5.0V
STANDOFF 21.0mm
LONG RAIL

DESCRIPTION: PC68公座雙層無推杆墊高21.0卡槽2.2/1.1前後2.3魚叉孔H型支架有上下支撐片成品