
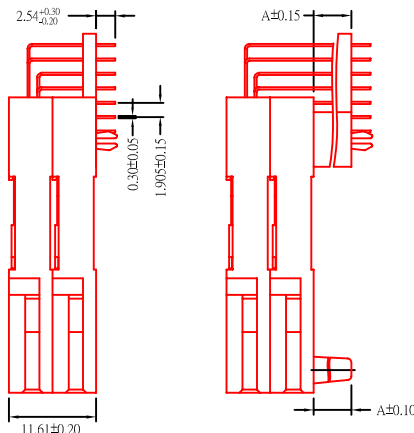
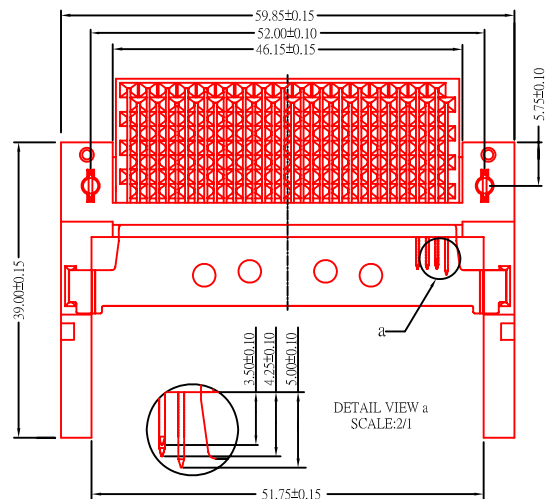


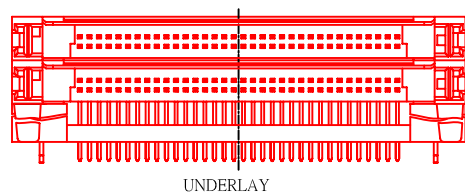


THE DIRECTION OF INSERTING CARD
SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

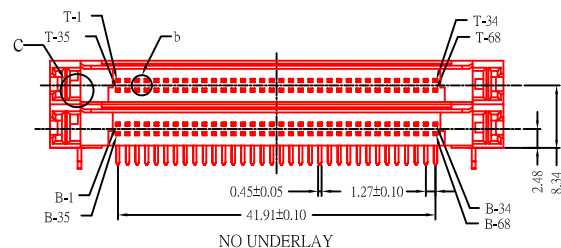

Pin Type	Interface Dim.	Pin No.
Detect	3.50 mm	36, 67
General	4.25 mm	all other pins
Power	5.00 mm	1, 17, 34, 35, 51, 68

MATERIAL:
INSULATOR:PBT,UL94V-0,BLACK.
CONTACTS:COPPER ALLOY,
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL.
GUIDE: PBT,UL94V-0,BLACK,

ELECTRICAL:
CURRENT RATING: 0.5A AC, DC
TEMPERATURE RANGE: -40°C ~ +85°C
INSULATION RESISTANCE:1000MΩ MIN(500V DC)
CONTACT RESISTANCE: 40mΩ MAX.
WITHSTANDING VOLTAGE: 500V AC/MINUTE

Ordering Information

B \ A	DIM. B = 1.1 mm (0) Voltage 5V	DIM. B = 2.2 mm (V) Voltage 3.3V
(0) A = 0.0 mm	PCCB1-PR00V5Z-68	PCCB1-PR00V3Z-68
(E) A = 2.0 mm	PCCB1-PR20V5Z-68	PCCB1-PR20V3Z-68
(G) A = 2.2 mm	PCCB1-PR22V5Z-68	PCCB1-PR22V3Z-68
(F) A = 3.0 mm	PCCB1-PR30V5Z-68	PCCB1-PR30V3Z-68
(H) A = 4.0 mm	PCCB1-PR40V5Z-68	PCCB1-PR40V3Z-68
(J) A = 5.0 mm	PCCB1-PR50V5Z-68	PCCB1-PR50V3Z-68

RoHS Compliant

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

PCCB1-PRxxVxZ-68-LF

SERIES
MALE
DIP 90°
CLIP
V3:3.3V
V5:5.0V
LEADFREE
68 WAY
00.20.22.30.40.50mm HIGH

DESCRIPTION: PC公座雙層無支架墊高XX卡 槽1.1/2.2前2.3魚叉孔後帶塑膠墊高柱成品

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com