
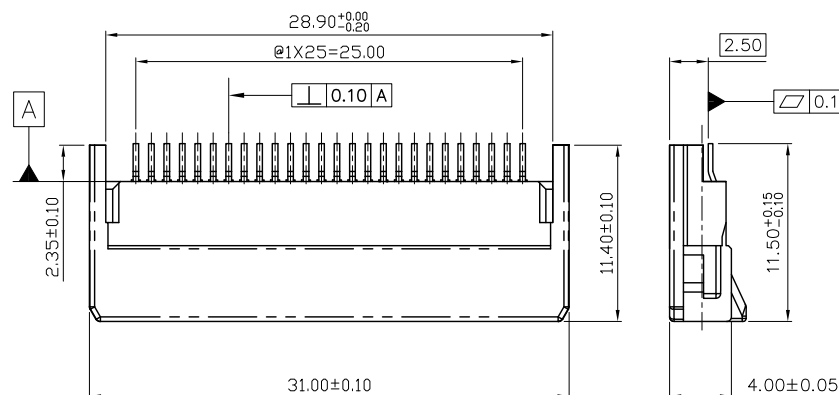
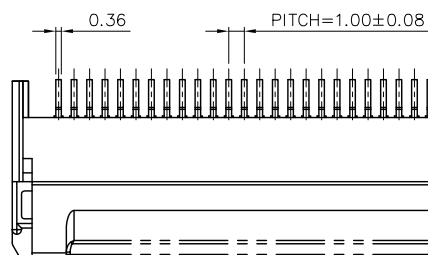
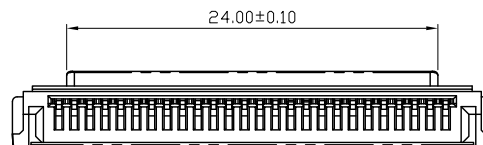


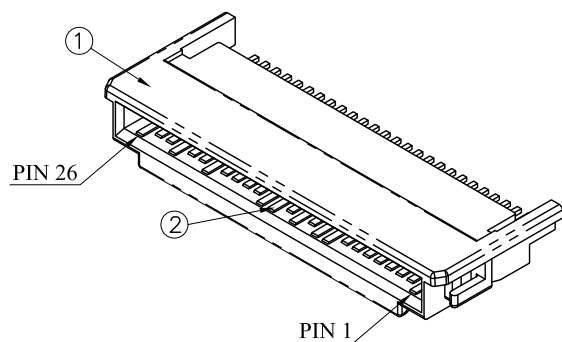

- Electrical character:
1. Insertion loss(IL)
1.7 dB max up to 3.125 GHz ;
≤ -5.5 dB up to 6GHz.
 2. Return loss(RL)
≤-10 dB up to 3.125 GHz ;
≤ -5 dB up to 6GHz.
 3. Crosstalk(NEXT)
-32 dB max up to 3.125 GHz ;
≤ -26 dB at 6GHz.
 4. Current rating
0.75A per pin minimum.
 5. Contact Resistance(LLCR)
Initial : 40 mΩ max.
Final(after stress) : 55mΩ max.
 6. Withstanding voltage
No shorting or other damages
after 500Vrms AC for 1 minute.

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.12
.XX ± 0.08
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PCE-CF54-26MH-LF

SERIES



LEADFREE

26 WAY TO MINI HDMI

WIDTH 53.95mm

CARD FRAME

DESCRIPTION: 26 pin female connector for Express card

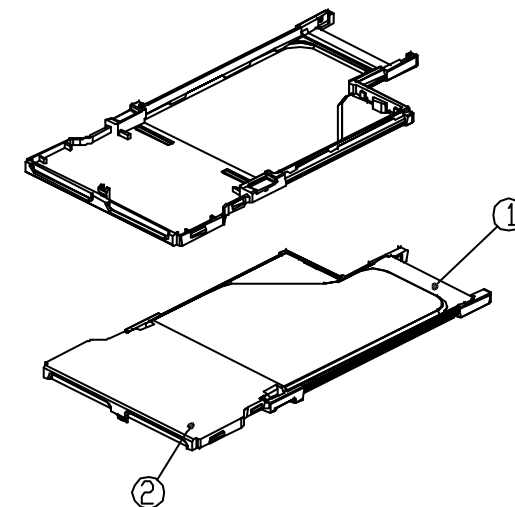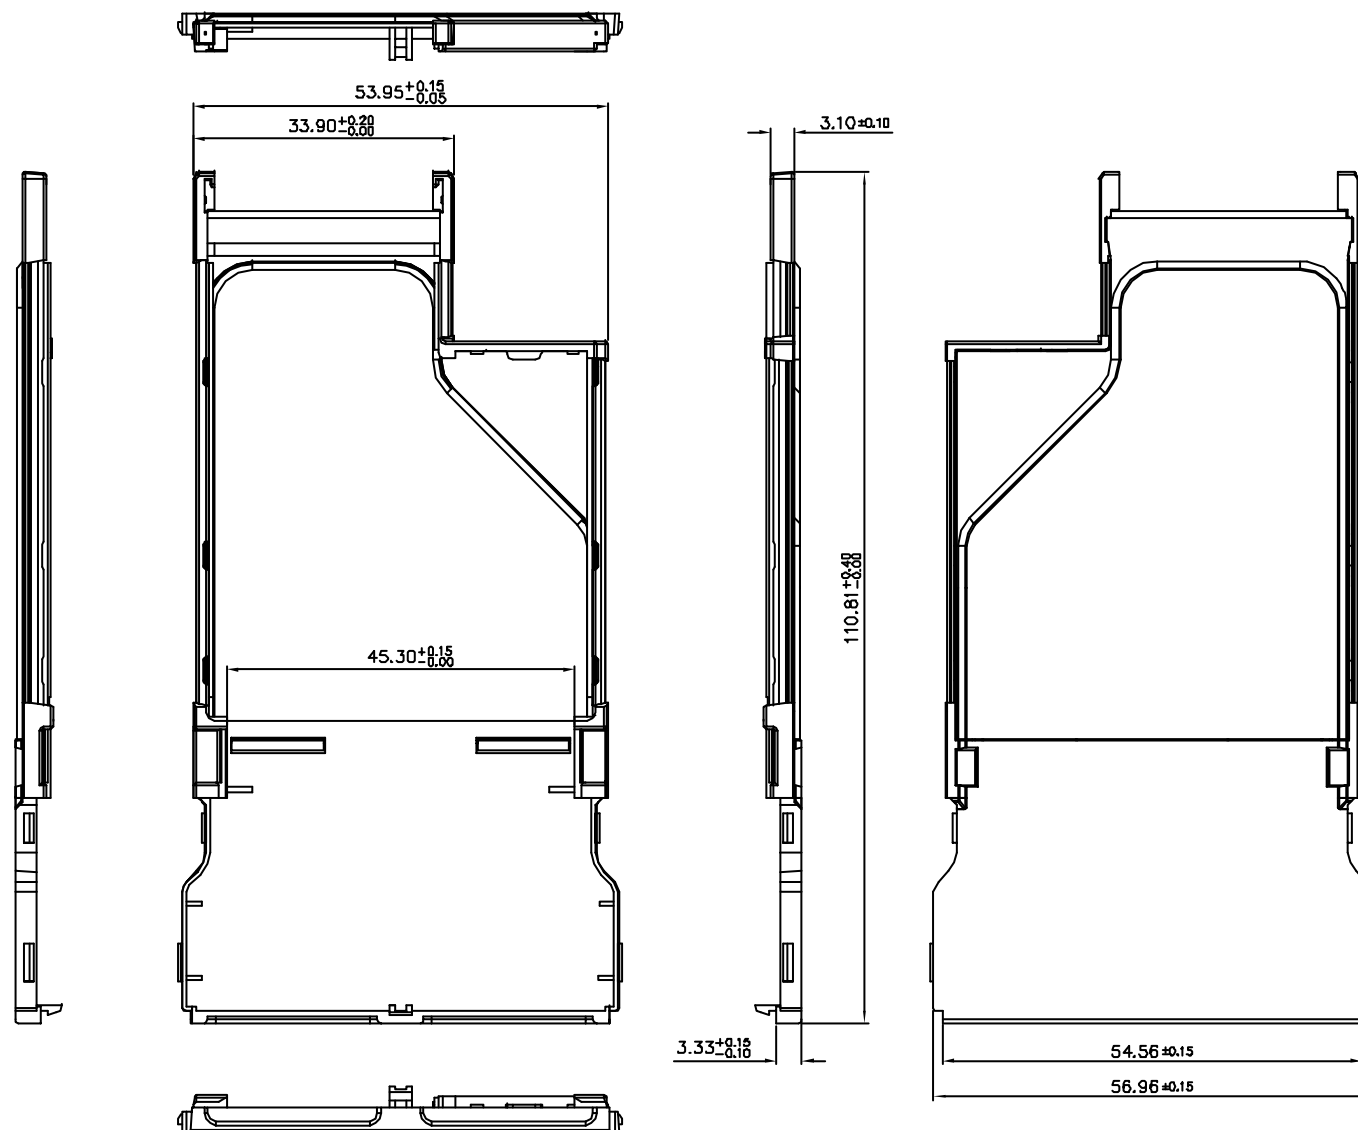

Note

1.Lower Cover

2.54mm/ExpressCard Plastic Frame Cover

3. Insulating Tape

4. Adhered Tape

With regard to adhesive position of the mylar, please refer to the drawing of adhesive position as adhered Type 33. Adhered positions to the double-side adhesive tape 5

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.12
.XX $\pm$ 0.08
.XXX $\pm$
ANG $\pm$




PPOJECTION

照片框

ORDER INFORMATION

PCE-CF54-26MH-LF
SERIES | LEADFREE
26 WAY TO MINI HDMI
WIDTH 53.95mm
CARD FRAME

DESCRIPTION: Lower Cover Assembly

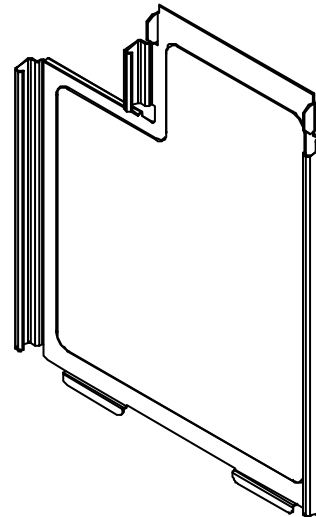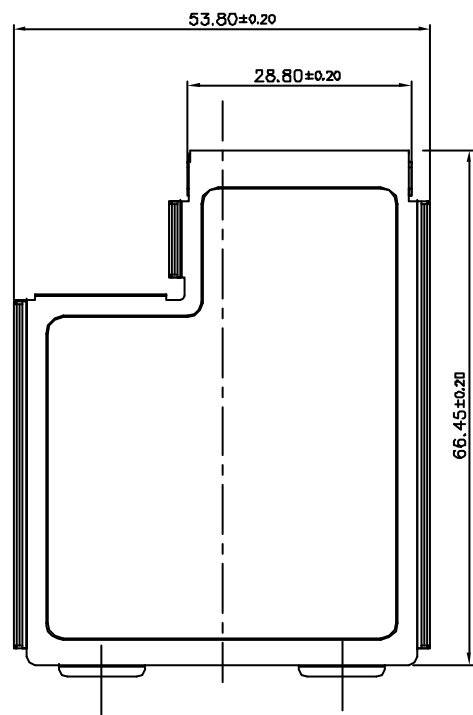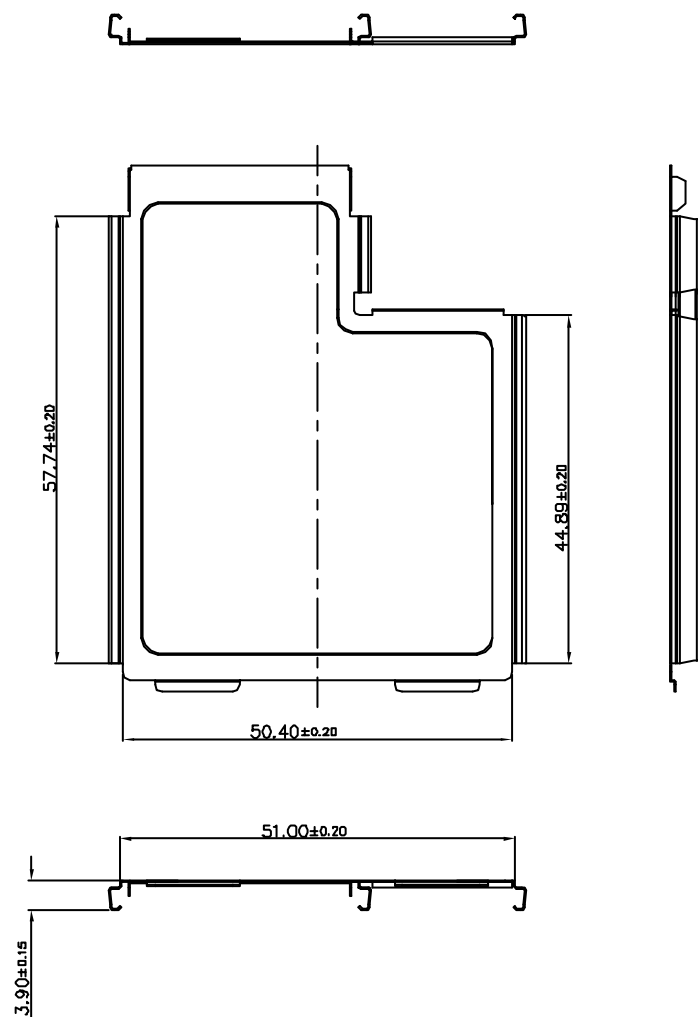

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4








X, ±
.X ± 0.12
.XX ± 0.08
.XXX ±
ANG ±

PPOJECTION

ORDER INFORMATION

PCE-CF54-26MH-LF
SERIES LEADFREE
26 WAY TO MINI HDMI
WIDTH 53.95mm
CARD FRAME

DESCRIPTION: Top stainless case for Express card/54

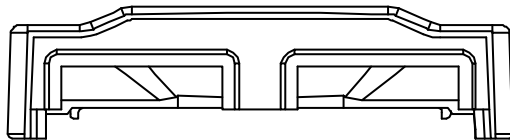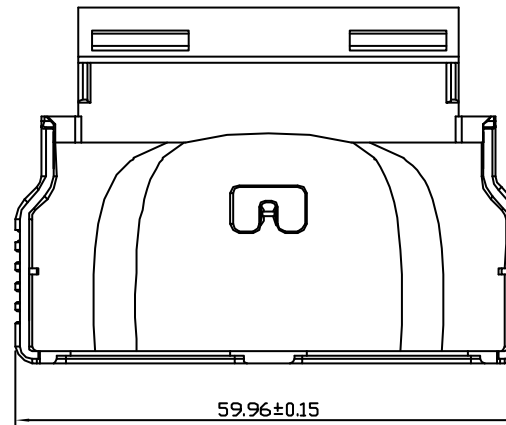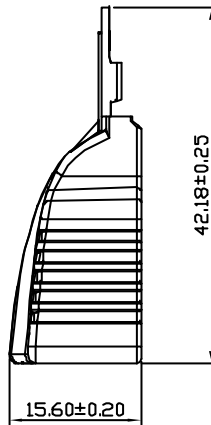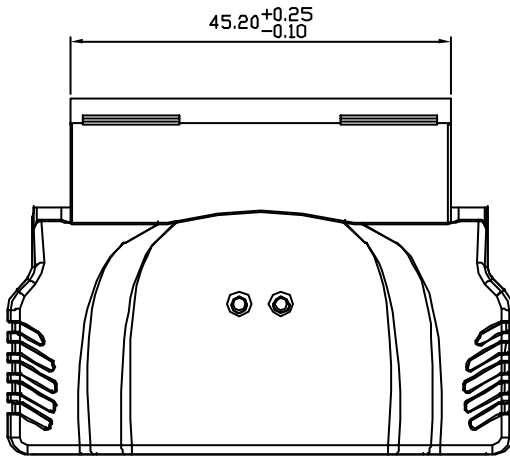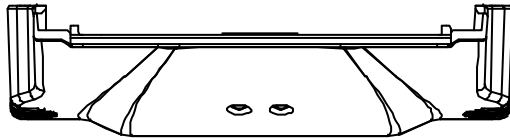

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.12
.XX ± 0.08
.XXX ±
ANG ±






PPOJECTION

照片框

ORDER INFORMATION

PCE-CF54-26MH-LF
SERIES LEADFREE
26 WAY TO MINI HDMI
WIDTH 53.95mm
CARD FRAME

DESCRIPTION: Top Cover Assembly

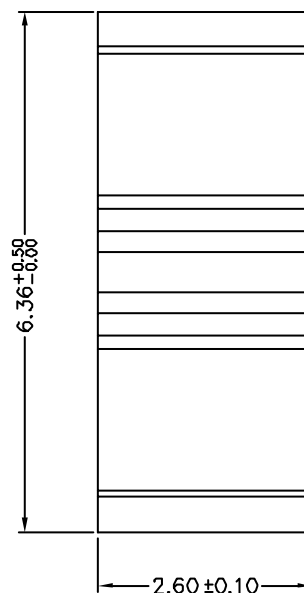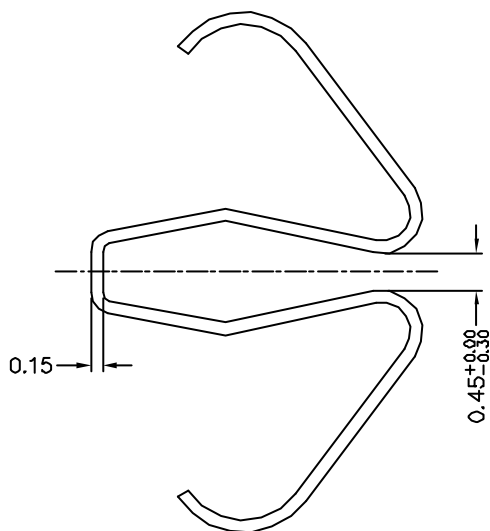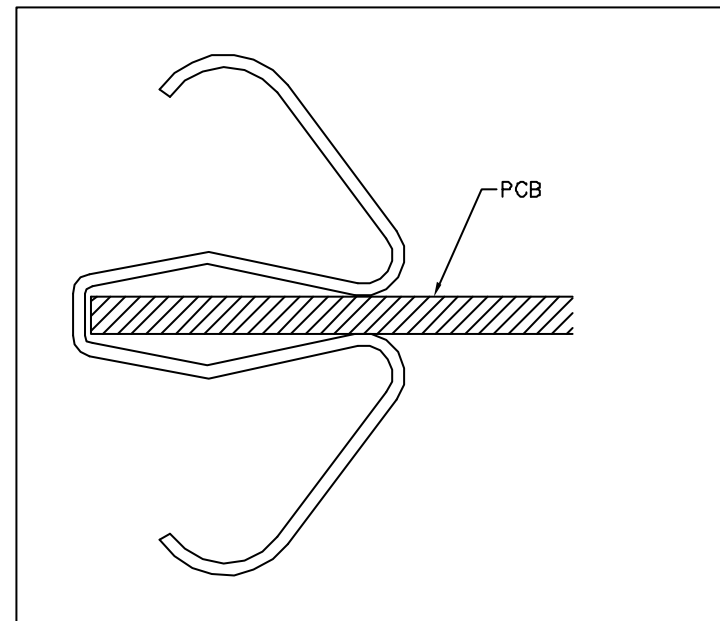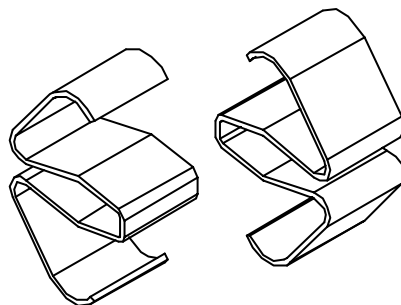

- Note
- 1.Material:
Metal- Phosphor Bronze,
 - 2.Thickness $0.15 \pm 0.02\text{m/m}$
 - 3.Underplated: Nickel
Contact Area Plating: Tin
 - 4.Underplated: Nickel
Contact Area Plating: Gold

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.12
.XX ± 0.08
.XXX ±
ANG ±

PPOJECTION

ORDER INFORMATION

PCE-CF54-26MH-LF
SERIES | LEADFREE
26 WAY TO MINI HDMI
WIDTH 53.95mm
CARD FRAME

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: Clip