


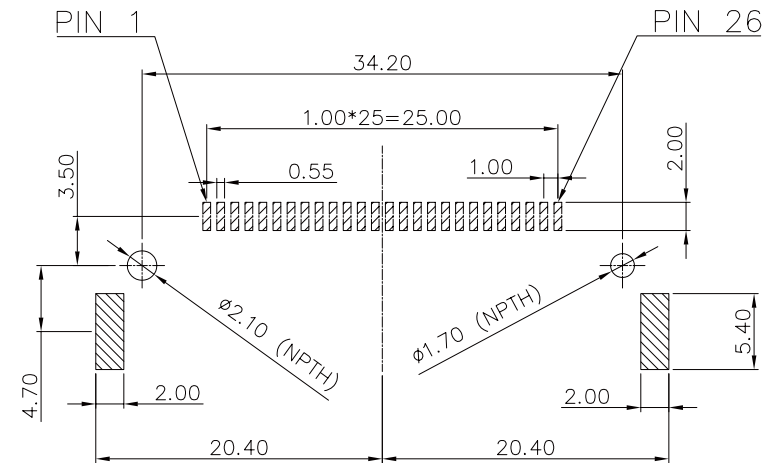

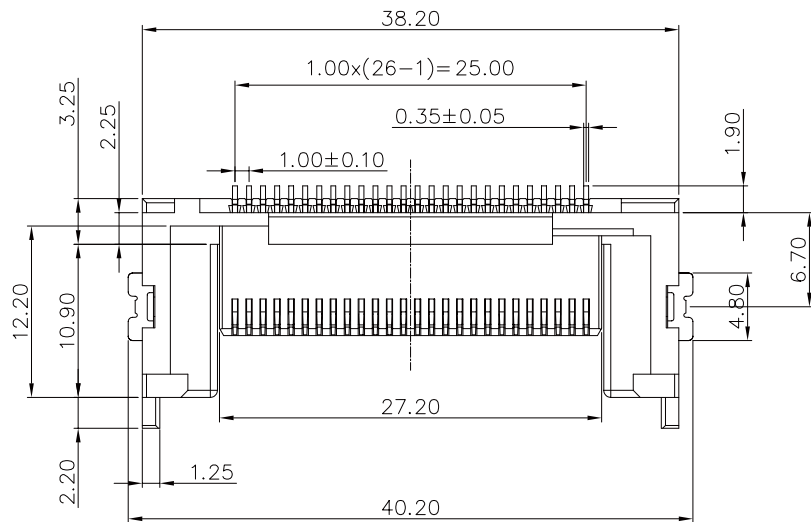


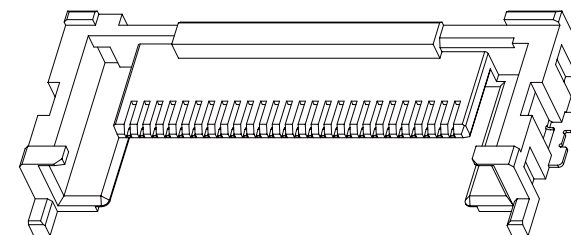

RECOMENDED PCB LAYOUT
TOLERANCE: $\pm 0.05\text{mm}$ (TOP VIEW)

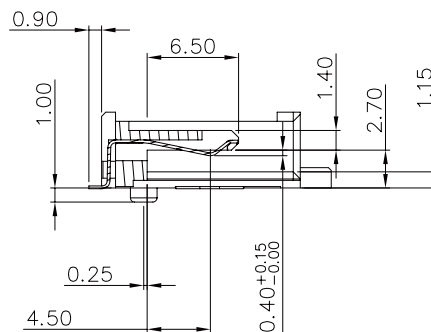

- NOTE:
- 1)Material:
 - Housing: Engineering Plastic, LCP With 30% G.F. UL 94V-0 RATED
 - Contact: Copper Alloy
 - Hold-Down: Copper Alloy
 - 2)Plating:
 - Contact:
 - Underplating: $1.27\mu\text{m}$ (50u") min. Nickel overall.
 - Contact Area: Gold Plating Over $1.27\mu\text{m}$ (50u") Nickel underplate.
 - Solder Tail: $2.54\mu\text{m}$ (100u") min. Tin Over Ni underplate.
 - Hold-Down: $2.54\mu\text{m}$ (100u") min. Tin over $1.27\mu\text{m}$ (50u") min. Ni underplate overall

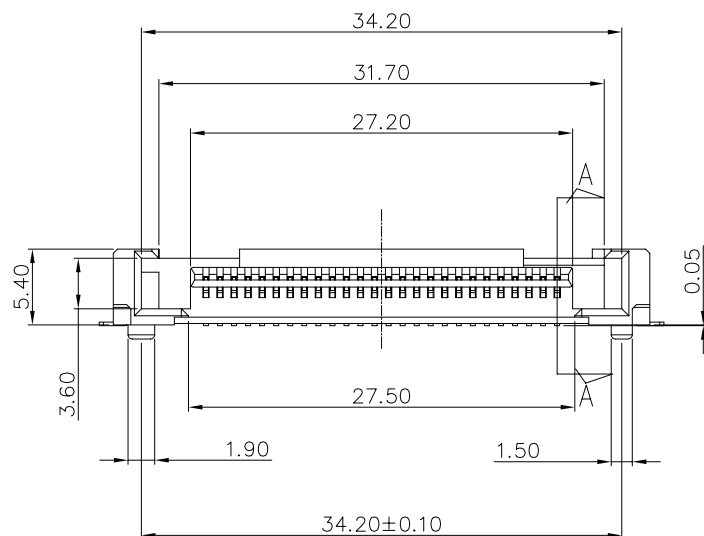

SECTION A-A

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.20
.XX ± 0.10
XXX $\pm$
ANG $\pm$

PPOJECTION



ORDER INFORMATION

PCE-PWP-26-LF
SERIES POST LEADFREE
26WAY
90°SMT
MALE

DESCRIPTION: