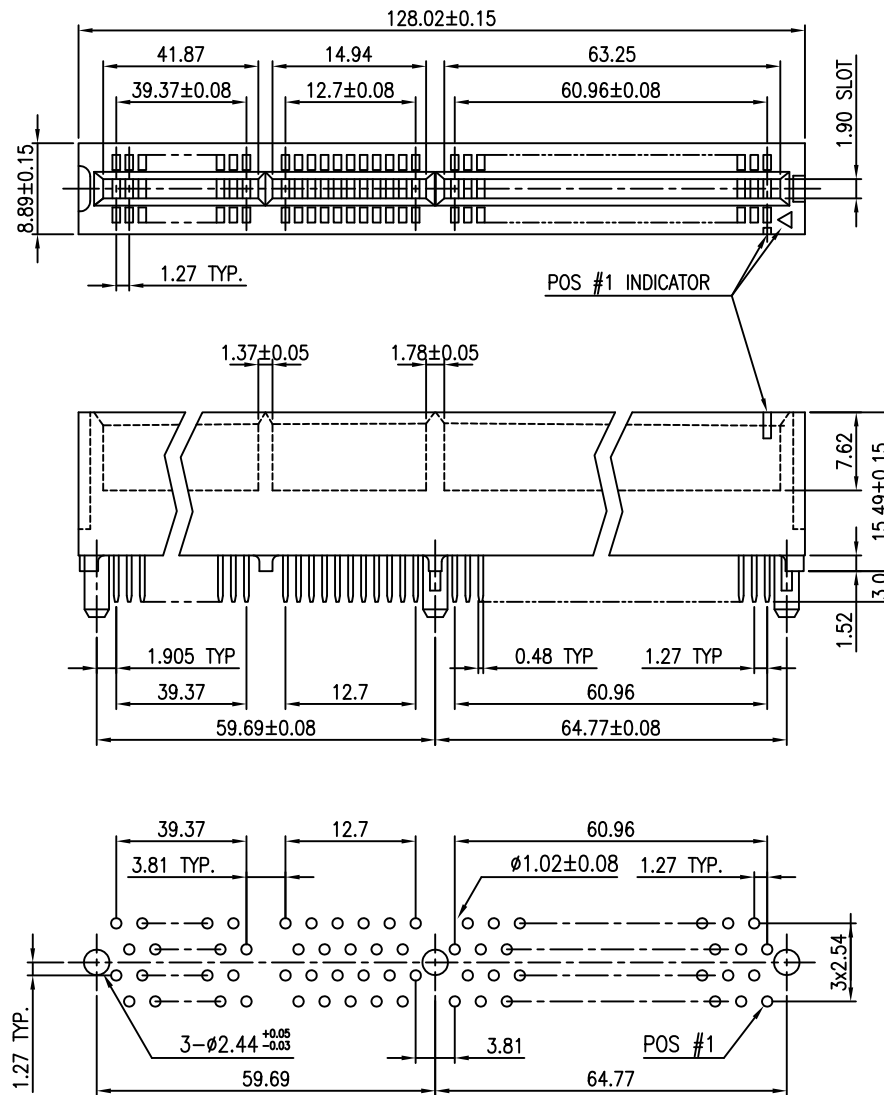


MATERIAL

INSULATOR: GLASS-REINFORCED HIGH THERMOPLASTIC,
PPS UL94V-0 RATED.
CONTACT: BERYLLIUM COPPER.
PLATING: MATING AREA- GOLD,
SOLDER AREA- TIN.

ELECTRICAL

VOLTAGE RATING: 250 VAC RMS.
CURRENT RATING: 3 AMP.
INSULATION RESISTANCE: 1,000 MEGOHMS MIN.
CONTACT RESISTANCE: 30 MILLIOHMS MAX.

MECHANICAL

CONTACT RETENTION: 460 GRAMS MIN PER CONTACT.
INSERTION FORCE: 230 GRAMS MAX PER CONTACT PAIR.
WITHDRAWAL FORCE: 15 GRAMS MIN PER CONTACT PAIR

ENVIRONMENTAL

TEMPERATURE RANGE: -55° TO +105°.

RECOMMENDED PCB LAYOUT

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ±
.X ± 0.10
.XX ± 0.05
.XXX ±
ANG ±



ORDER INFORMATION

PCI-DPPS-184V5-LF
SERIES | PPS | 184 WAY | LEADFREE
DIP 180°

DESCRIPTION: 64 BIT PCI CARDEGE, 5.0V

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com