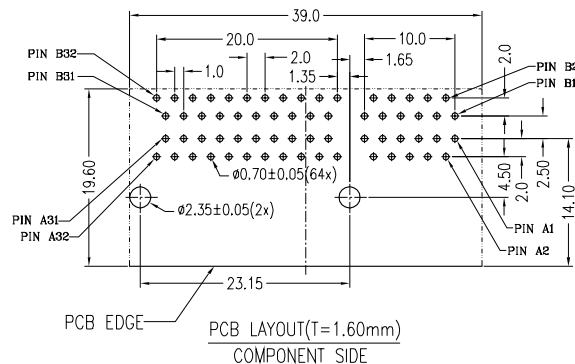
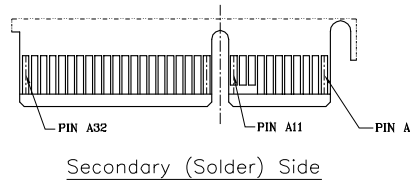
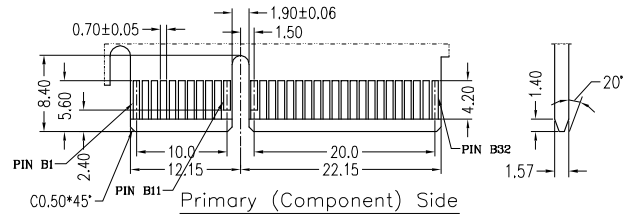


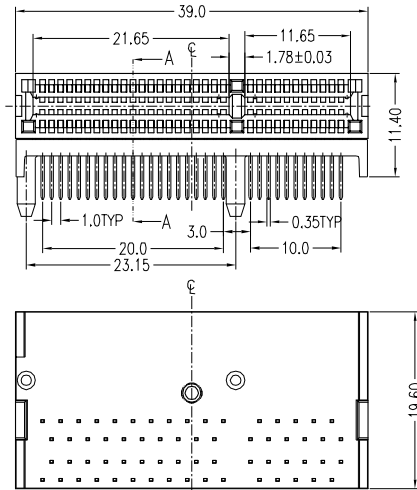


NOTES:

*Material

Housing: Nylon46, UL 94V-0 Rated. Color: Black

Contact: Brass

Plating: Au plating on contact area,
Sn (100u" Min.) plating on solder tail,
Ni (40u" Min.) underplating overall.

*Mechanical

Insertion Force: 1.15N max per contact pair;

Withdrawal Force: 0.15N min per contact pair;

Contact Retention Force: 4.9N min per contact;

*Electrical Specification

Contact Resistance : 30 mΩ Max.

Current Resistance : 1.1 Ampere

Insulation Resistance : 1000 MΩ Min, At 500V AC.

*Environmental

Operating Temperature : -55°C to +105°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

照片框

ORDER INFORMATION

PCIX-R11-064-LF
SERIES | LEADFREE
64 WAY
HIGH 11.4mm
DIP 90°

DESCRIPTION: PCI Express R/A DIP Type Add Height 64P