
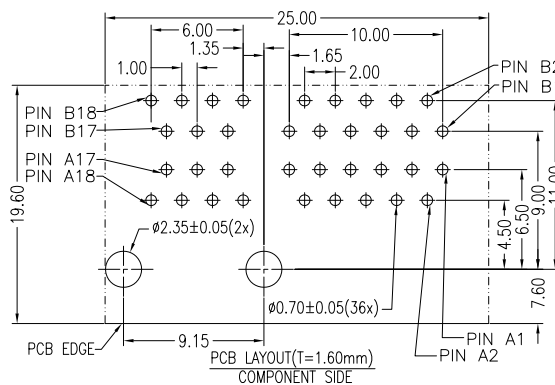
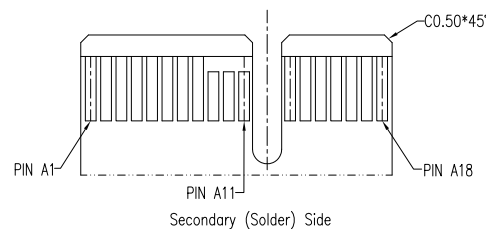
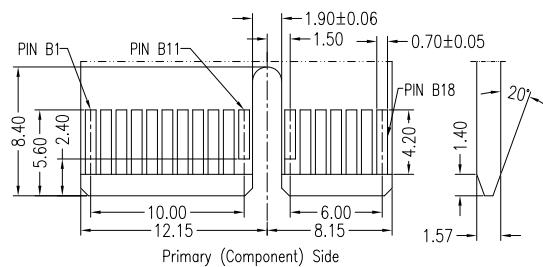

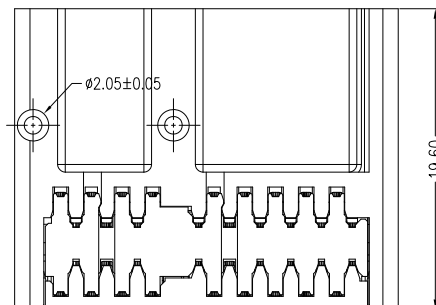
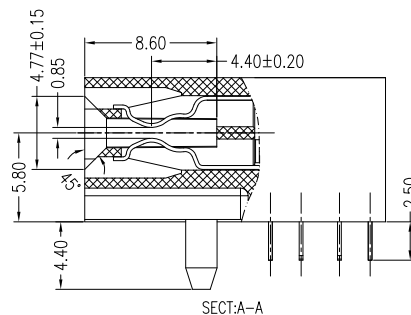


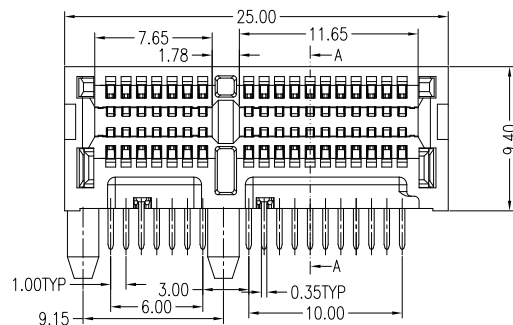

NOTES:

*Material

Housing: LCP, UL 94V-0 Rated. Color: Black.

Contact: Brass.

Plating: Au Plating On Contact Area;

Sn(100u" Min.) Plating On Solder Tail;

Ni(50u" Min.) Underplating Overall

*Mechanical

Insertion Force: 1.15N Max per contact pair;

Withdrawal Force: 0.15N Min per contact pair;

Contact Retention Force: 3.5N Min per contact;

Durability: 50 cycles

*Electrical Specification


Current Rating : 1.1 Ampere

Contact Resistance : 30mΩ Max.

Insulation Resistance : 1000MΩ Min, At 500V AC.

*Environmental

Operating Temperature : -55°c to +105°c



3D VIEW

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.35

.XX ± 0.25

.XXX ± 0.15

ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PCIX-RLCP-036-LF

SERIES LCP LEADFREE

36 WAY

DIP 90°

DESCRIPTION: PCI EXPRESS R/A DIP TYPE (GEN3) 36PIN (Right key)