
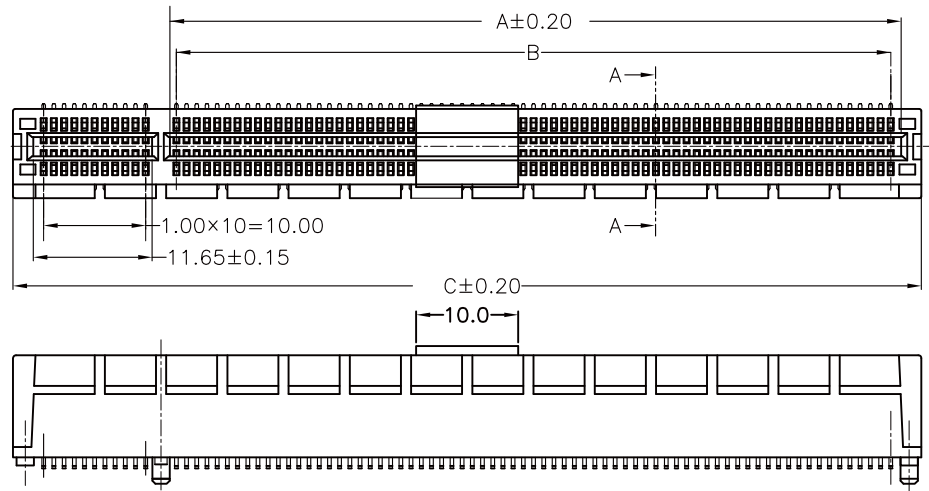



PCB LAYOUT

PIN數	A	B	C	D
36	7.65	6.00	25.00	9.15
64	21.65	20.00	39.00	23.15
98	38.65	37.00	56.00	40.15
164	71.65	70.00	89.00	73.15

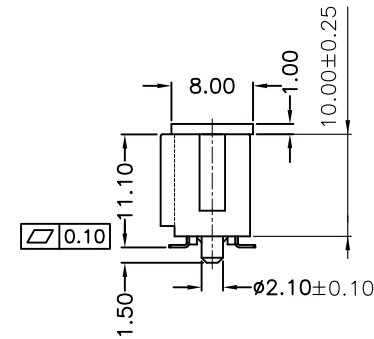

SECTION: A-A

Note:

1:Electical Performance

1.1.Dielectric Withstanding Voltabge: 500V/AC For 1.0 Minute.

1.2.Contadt Resistance:30mΩ Max

1.3.lnsulation Resistance:1000MΩ Min

2.Mechanical Performance.

2.1.CONTACT INSERTION FORCE: 0.115Kg Max Per.Contact Pair.

2.2.CONTACT WITHDRAWAL FORCE: 0.015Kg Min Per.Contact Pair.

2.3.Terminal Retention Force (in housing): 0.5Kg Minper Terminal.

3.Material & Finish:

3.1.Insulator:Hi-Temp NY-9T UL 94V-0,260°/10Sec, Black

3.2.Contact Plating: Tin Plating At Solder Tail Area;
Gold Plating At Mating Area, All Over Nickel Plating.

4.Environmental:Operating Temperature: -55°C~+85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.20
.XX ± 0.10
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

PCIX-VPCR-xxx-LF

SERIES
LEADFREE
036~164 WAY
REEL
CAP
POST
180°SMT

DESCRIPTION:

DEVICE TYPE: 36P


CUSTOMER :

DWG NO :

MATERIAL :PS0.4黑色

DATE :102.03.05

ITEM	W	A0	B0	K0	K1	P	E	F	D	D1	P0	P2
DIM	44 ^{+0.3} _{-0.3}	8.8 ^{+0.1} _{-0.1}	27.3 ^{+0.1} _{-0.1}	13.2 ^{+0.1} _{-0.1}	12.4 ^{+0.1} _{-0.1}	20 ^{+0.1} _{-0.1}	1.75 ^{+0.1} _{-0.1}	20.2 ^{+0.1} _{-0.1}	1.5 ^{+0.1} _{-0.0}	0 ^{+0.25} _{-0.0}	4.0 ^{+0.1} _{-0.1}	2.0 ^{+0.1} _{-0.1}

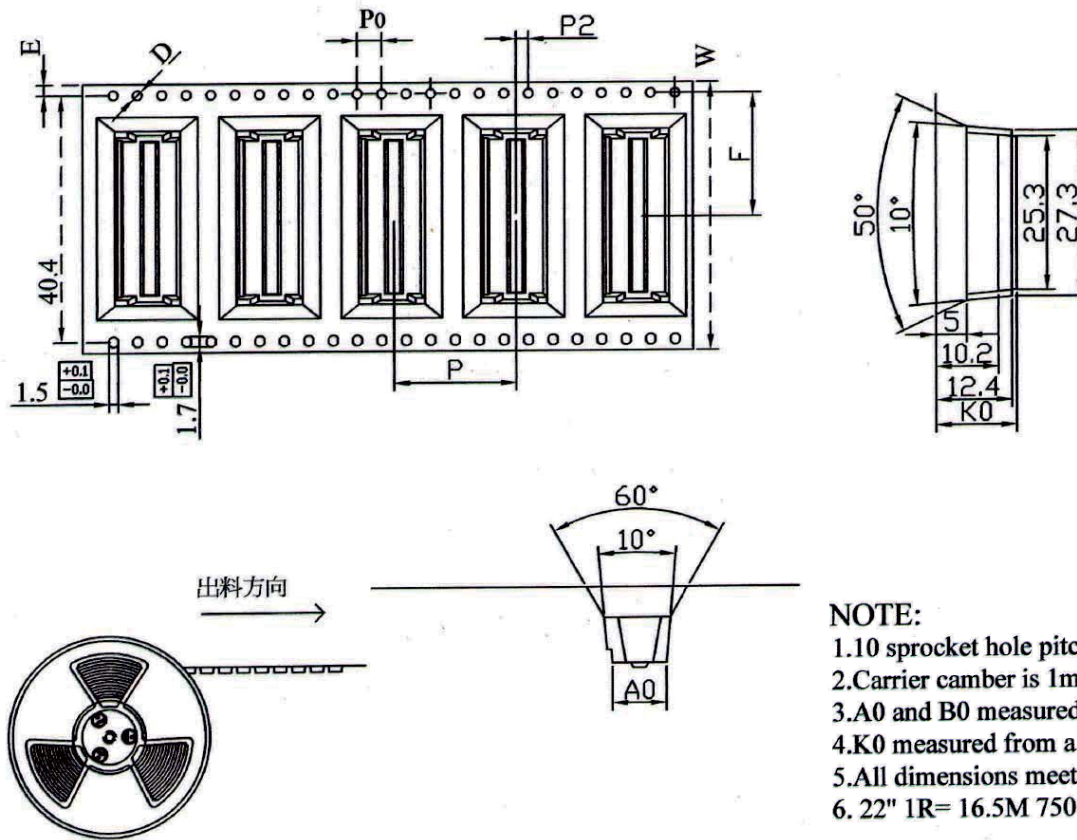

NOTE:

- 1.10 sprocket hole pitch cumulative tolerance ± 0.2
- 2.Carrier camber is 1mm in 100mm
- 3.A0 and B0 measured on a plane 0.3mm above the bottom of the pocket
- 4.K0 measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- 5.All dimensions meet EIA-481-2 requirements
6. 22" 1R= 16.5M 750 PCS 13"1R= 5.5M 250PCS

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
X ± 0.20
.XX ± 0.10
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

PCIX-VPCR-xxx-LF
SERIES
LEADFREE
036~164 WAY
REEL
CAP
POST
180°SMT

DESCRIPTION: 36pin