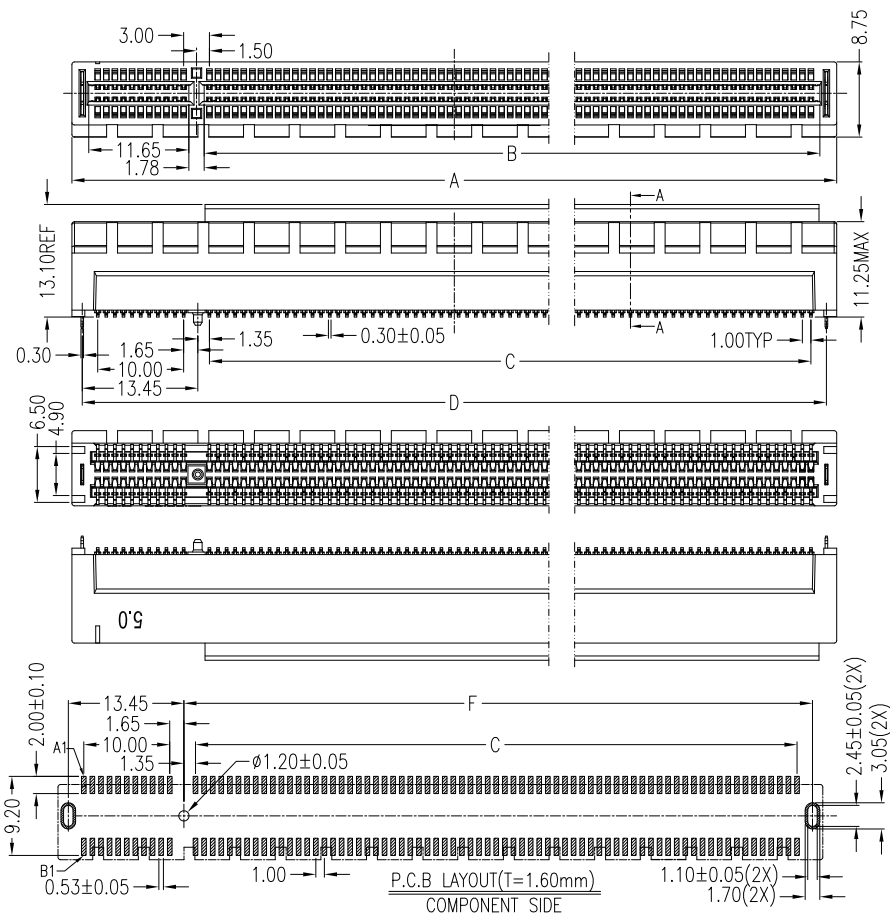


SECTION A-A

#POS REF	DIM'A'	DIM'B'	DIM'C'	DIM'D'	DIM'E'	DIM'F'
36P	25.00	7.65	6.00	22.60	8.15	9.15
64P	39.00	21.65	20.00	36.60	22.15	23.15
98P	56.00	38.65	37.00	53.60	39.15	40.15
164P	89.00	71.65	70.00	86.60	72.15	73.15

NOTES:

*Material

Housing: PA10T, UL 94V-0.

Cap: LCP, UL 94V-0.

Contacts: Copper Alloy.

Plating : Au Plating on Contact Area.

Sn (100u" Min.) plating on solder tail.

Ni (50u" Min.) underplating overall.

EMI: Stainless steel.

Harpoon: Brass.

Plating: Ni (50u" Min.) plating overall.

*Mechanical:

Insertion Force: 1.15N max per contact pair.

Withdrawal Force: 0.15N min per contact pair.

Contact Retention Force: 3.43N min per contact.

Durability: 50 cycles.

*Electrical Specification

Current Rating : 1.1 Ampere.




Contact Resistance : 30 mΩ Max.

Insulation Resistance : 1000 MΩ Min.

Dielectric Withstanding Voltage: 500 VAC.

*Environmental

Operating Temperature: -55°C To +105°C

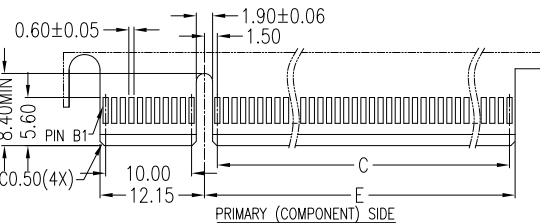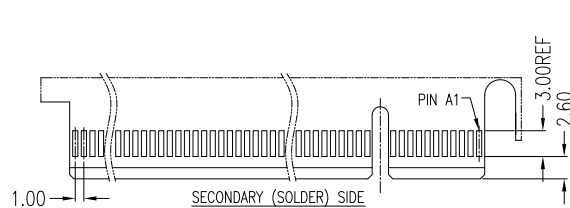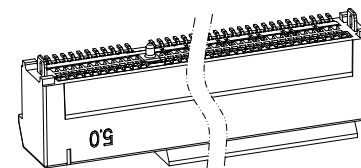

ADD-IN CARD EDGE-FINGER DIMENSIONS
DEFAULT TOLERANCE ±0.13

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

照片框

ORDER INFORMATION

PCIX-VZC-xxx-LF

SERIES

LEADFREE

036~164 WAY

CAP

CLIP

180°SMT

DESCRIPTION: PCI Express 5.0 SMT Type (Straight Metal Posts L:1.40)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com