


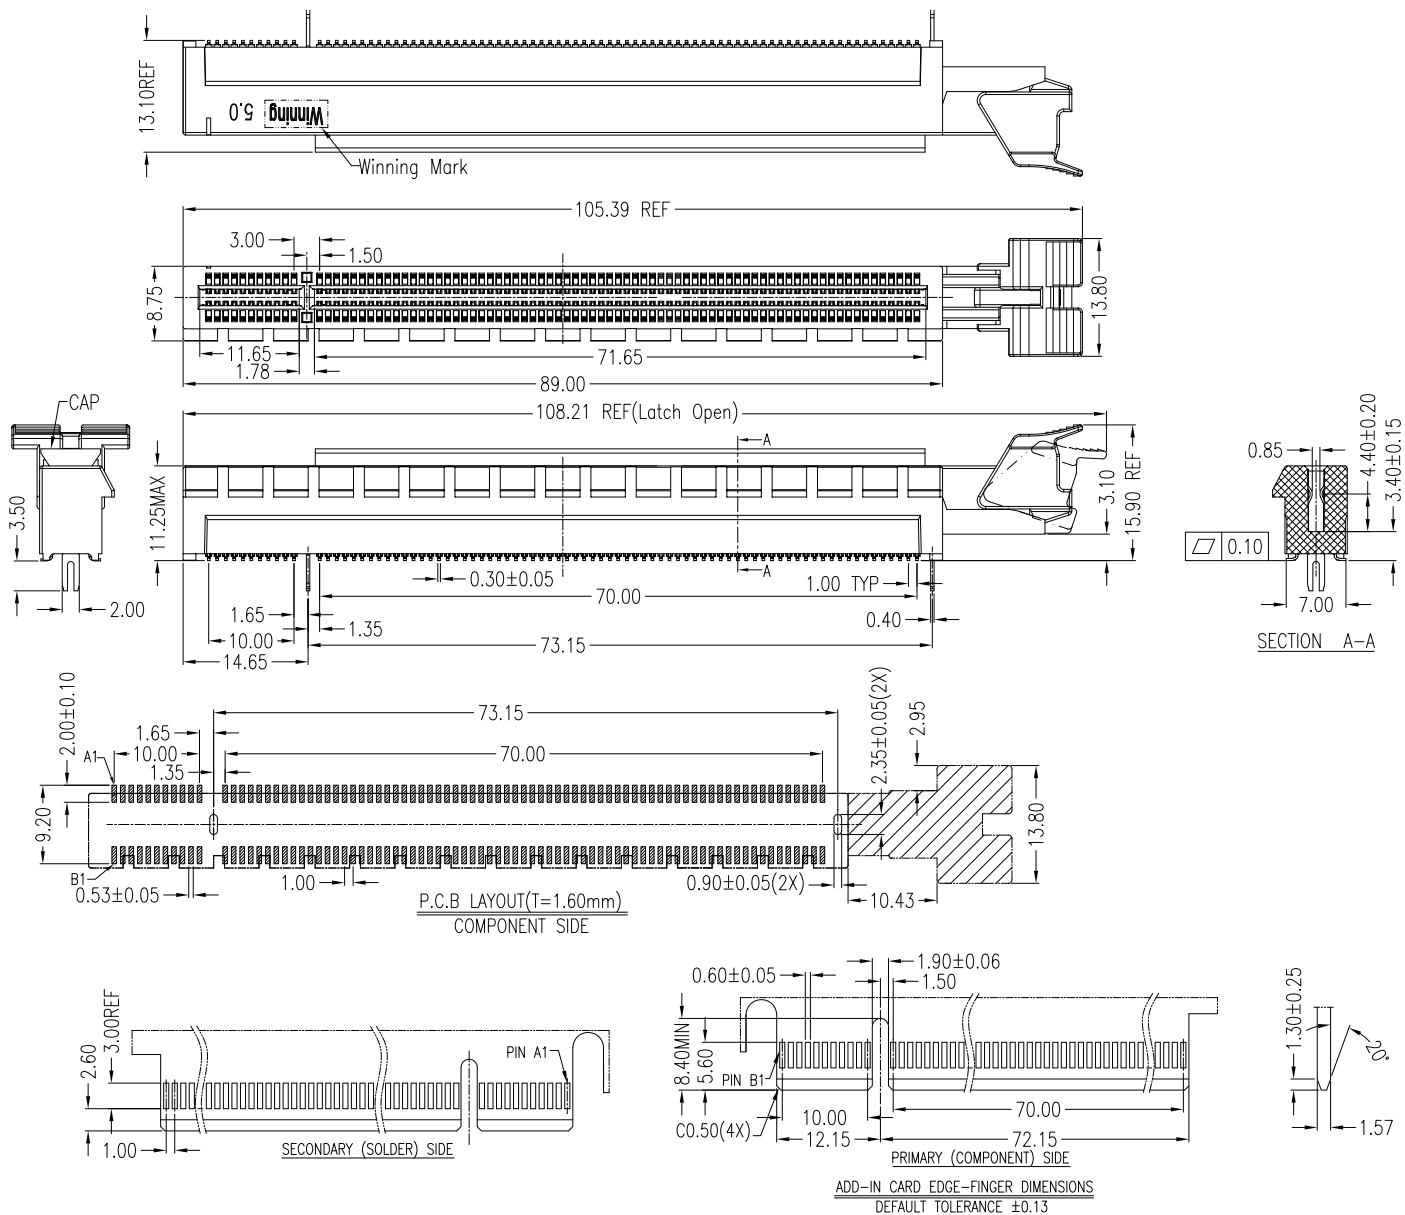

NOTES:

*Material

Housing: PA10T, UL 94V-0.

Latch: PA10T, UL 94V-0.

Cap: LCP, UL 94V-0.

Contacts: Copper Alloy.

Plating: Au Plating on Contact Area.

Sn (100u" Min.) plating on solder tail.

Ni (50u" Min.) underplating overall.

EMI: Stainless steel.

Harpoon: Brass.

Plating: Sn(100u" Min.) Plating Overall;

Ni(50u" Min.) Underplating Overall

*Mechanical:

Insertion Force: 1.15N max per contact pair.

Withdrawal Force: 0.15N min per contact pair.

Contact Retention Force: 3.43N min per contact.

Durability: 50 cycles.

*Electrical Specification

Current Rating: 1.1 Ampere.


Contact Resistance: 30 mΩ Max.

Insulation Resistance: 1000 MΩ Min.

Dielectric Withstanding Voltage: 500 VAC.

*Environmental

Operating Temperature: -55°C To +105°C

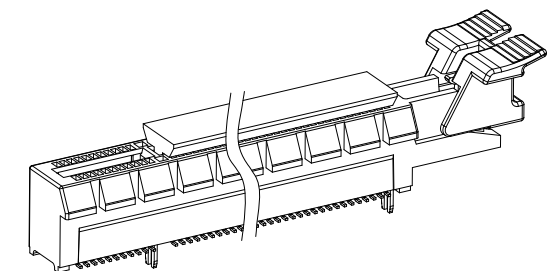

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

照片框

ORDER INFORMATION

PCIX-VZLC-164-LF

SERIES 164 WAY LEADFREE
CAP
PUSH LOCK
CLIP
180°SMT

DESCRIPTION: PCI Express 5.0 SMT Type (Double Push Type)