


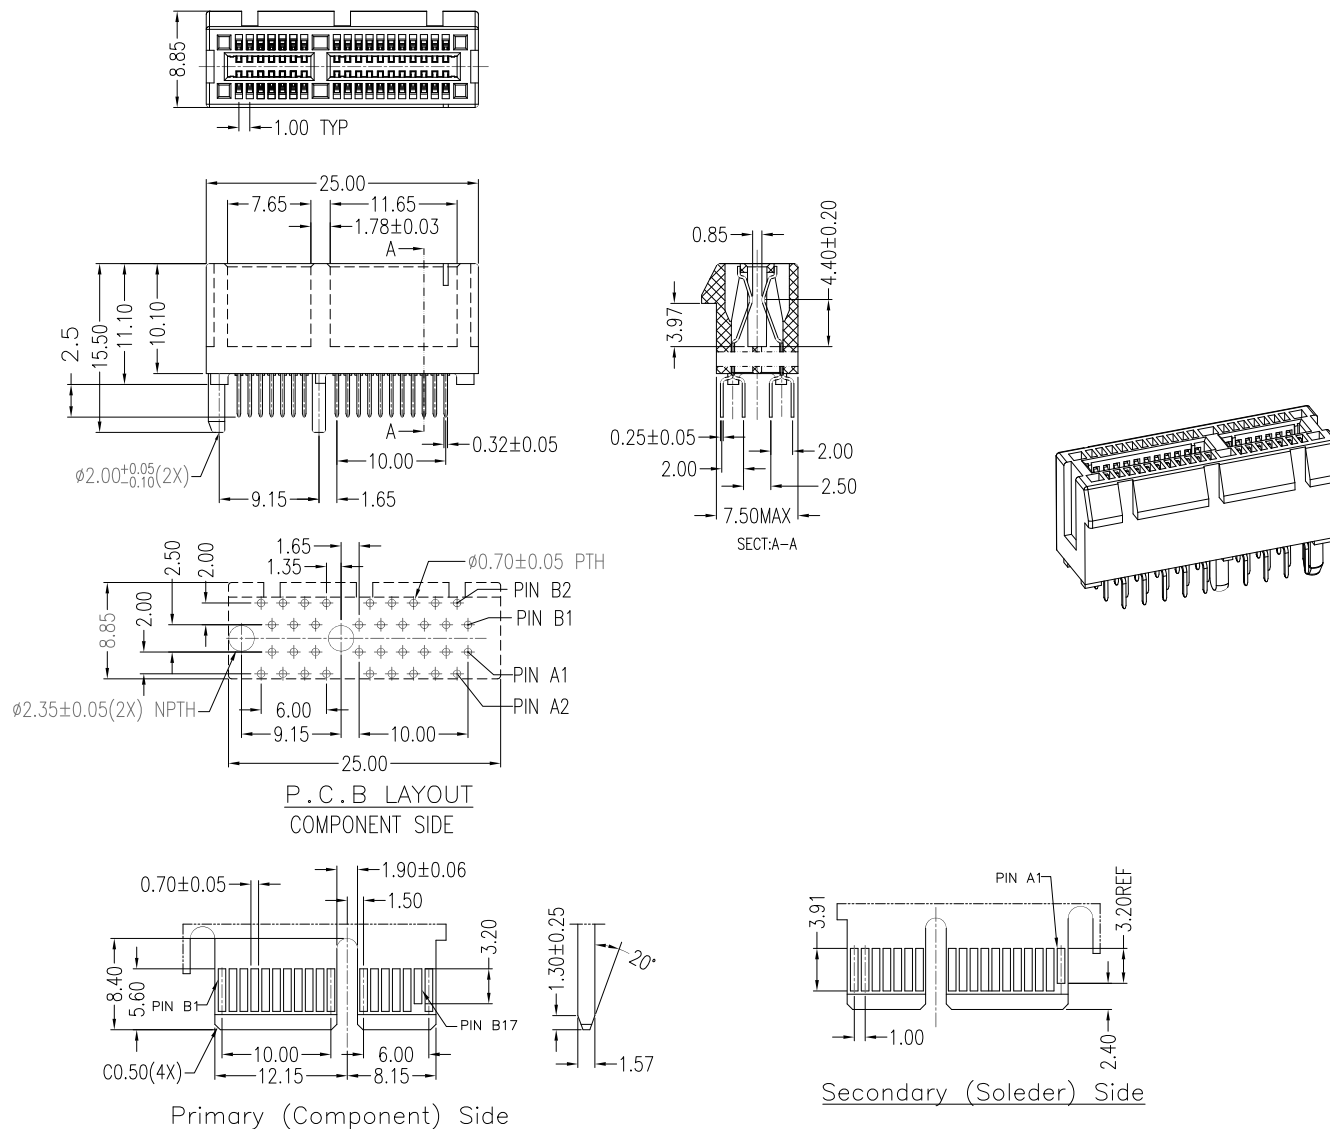

NOTES:

*Material

Body: Nylon46/Nylon66, UL 94V-0.

Contacts: Brass.

Plating: Au Plating on contact area.

Sn(100u"Min) plating on solder Tail.

Ni(50u"Min) contact underplating overall.

*Mechanical:

Insertion Force: 1.15N max per contact pair.

Withdrawal Force: 0.15N min per contact pair.

Contact Retention Force: 3.43N min per contact.

*Electrical Specification

Contact Resistance: 30 mΩ Max.

Current Rating: 1.1 Ampere.

Insulation Resistance: 1000 MΩ Min, At 500V AC.

*Environmental

Operating Temperature: -55°C to +105°C.

照片框

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

ORDER INFORMATION

PCIX3-DP-036-LF

SERIES T T LEADFREE
36 WAY
POST
DIP 180°

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: PCI EXPRESS 36Pin Plastic Posts (Subtract)