




3D VIEW

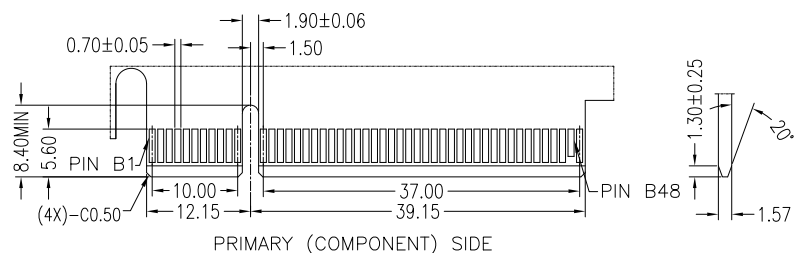

PRIMARY (COMPONENT) SIDE

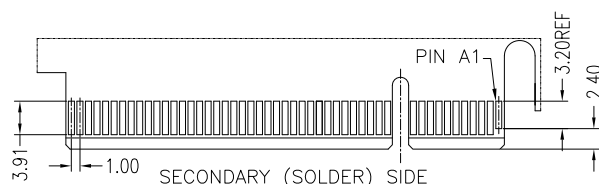

SECONDARY (SOLDER) SIDE

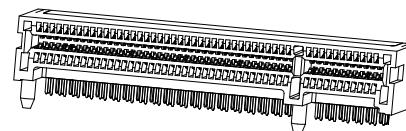

NOTES:

*Material

Housing: LCP, UL 94V-0 Rated. Color: Black.
Contact: Brass.
Plating: Au Plating On Contact Area;
Sn(100u" Min.) Plating On Solder Tail;
Ni(50u" Min.) Underplating Overall

*Mechanical


Insertion Force: 1.15N Max per contact pair;
Withdrawal Force: 0.15N Min per contact pair;
Contact Retention Force: 3.5N Min per contact;
Durability: 50 cycles

*Electrical Specification

Current Rating : 1.1 Ampere
Contact Resistance : 30mΩ Max.
Insulation Resistance : 1000MΩ Min, At 500V AC.

*Environmental

Operating Temperature : -55°C to +105°C

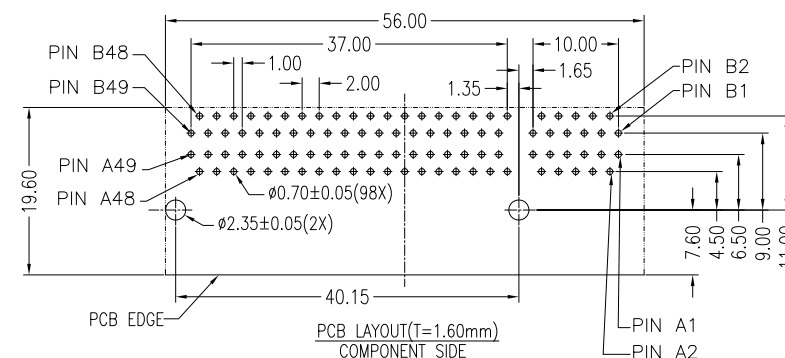

PCB LAYOUT(T=1.60mm)
COMPONENT SIDE

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

照片框

ORDER INFORMATION

PCIX3-RP-098-LF

SERIES LEADFREE
98 WAY
POST
DIP 90°

DESCRIPTION: PCI EXPRESS R/A DIP TYPE (GEN3) 98PIN (Right key)