

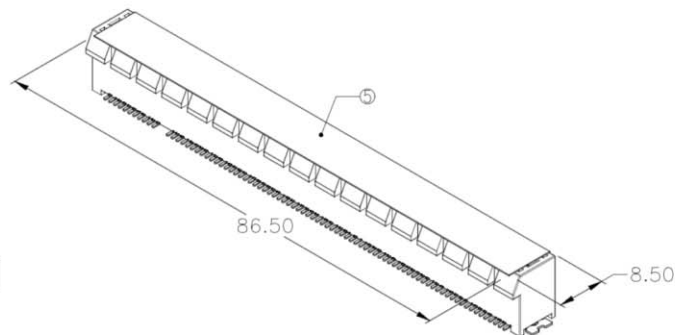
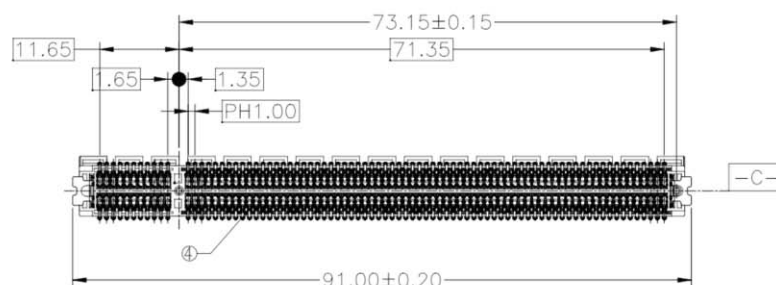
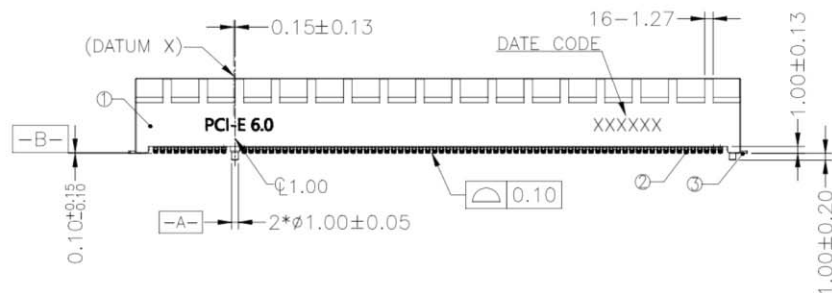


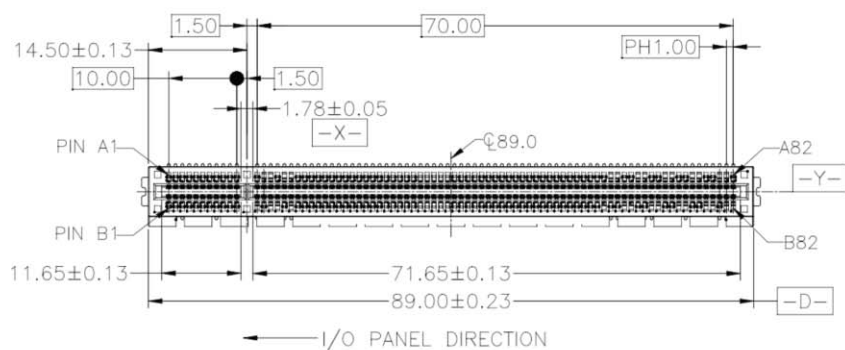

Specification:
Housing: PA10T UL94V-0, Black
Contacts: Au on contact area, See Table 1,
Matte tin 100u" Min. on solder area,
Ni 50u" Min. under plate
Fixed Sheet: Matte Sn plating 100u" Min.
Ni 50u" Min. under plate
Shielding Sheet: Over Nickel Ni 50u" Min.
Recommended process:
Reflow, Peak temperature: 260±5°C, 10s

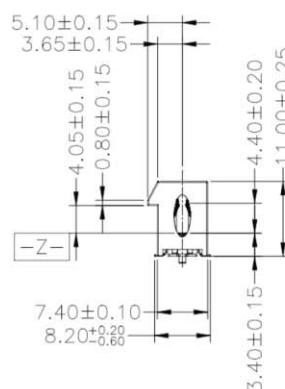

DATE CODE
XX XX X X
1 2 3 4
1. YEAR: 25/26
2. WEEK: 01/02
3. DAY: 1/2/3
4. SHIFT: D/N

R

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ± 0.50
.X ± 0.38
.XX ± 0.25
.XXX ± 0.15
ANG ±





照片框

ORDER INFORMATION

PCIX6-VPEC-164-LF

SERIES
CAP
EAR
POST
180°SMT
LEADFREE
164WAY

DESCRIPTION:

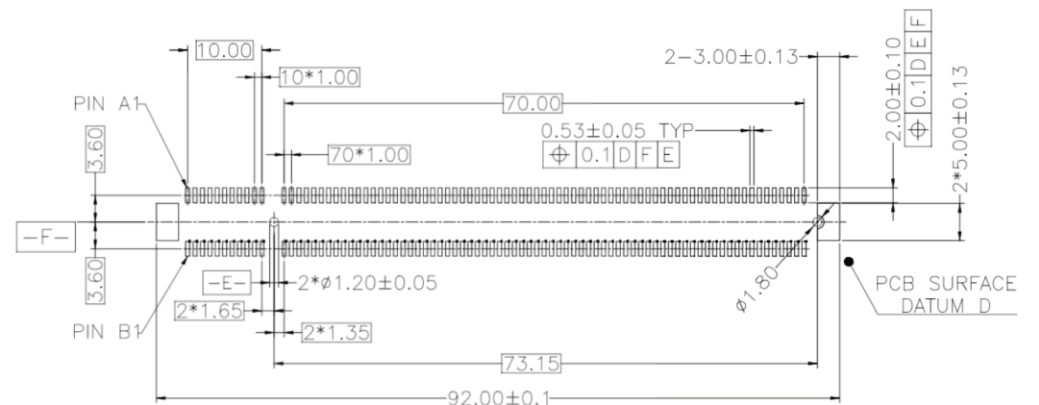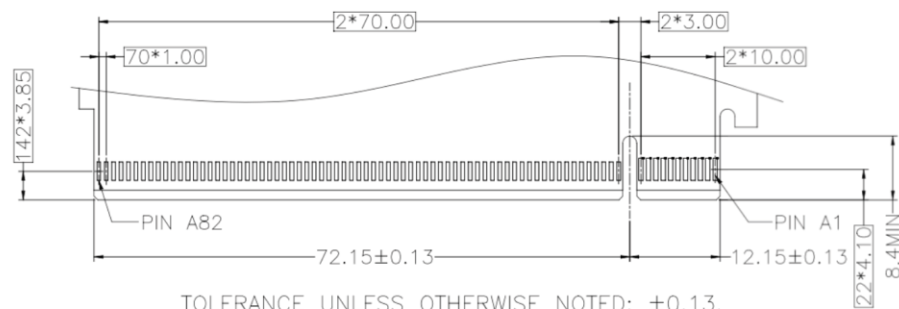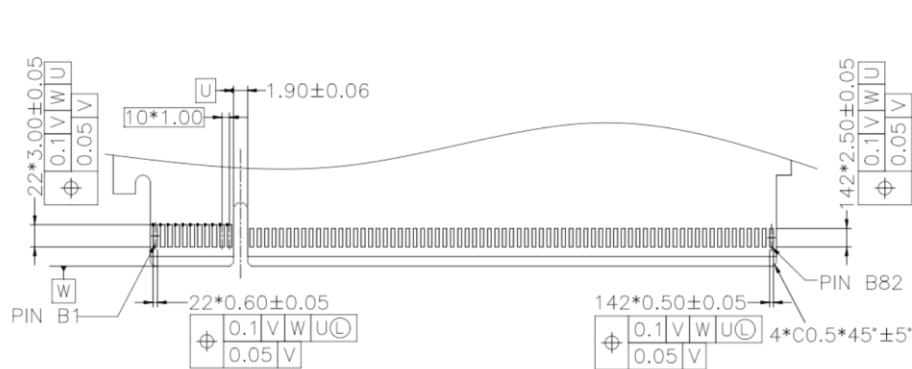

NOTE: TOLERANCE UNLESS OTHERWISE SPECIFIED IS ± 0.13
RECOMMENDED PCB LAYOUT, PAD TYPE

R

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X ± 0.50

.X ± 0.38

.XX ± 0.25

.XXX ± 0.15

ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

PCIX6-VPEC -164-LF

SERIES LEADFREE
164WAY

CAP
EAR
POST
180°SMT

DESCRIPTION: