





Material: *Insulator: Nylon 6T UL 94V-0 (Black)
 *Contact Post: Phosphor bronze, 0.30mm^t, Gold Flash Plated.
 *Solder Tab: Phosphor bronze, 0.15mm^t, Matte Tin Plated.
 Note: RoHS II and Halogen Free Compliance.

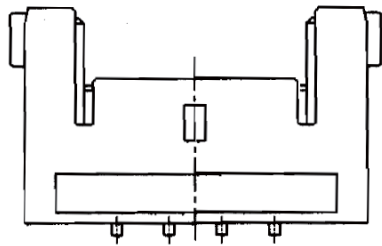

4P

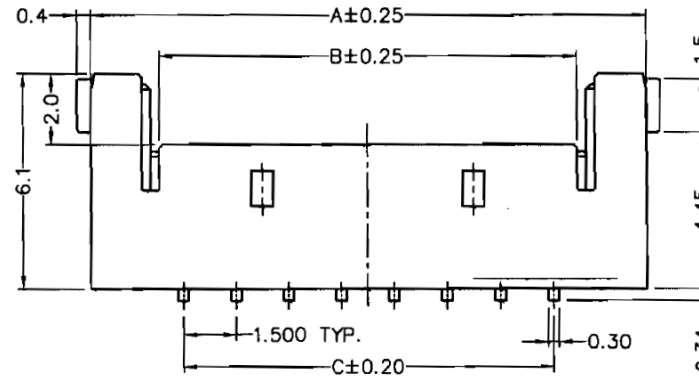

6P~12P

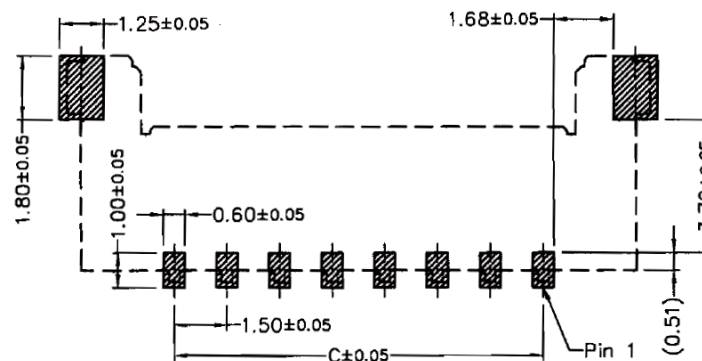

P.C.B. LAYOUT

Dimensional & Ordering Information:

Circuits	Part No.	Dimensions			Qty/Reel
		A	B	C	
4	PCK-WR-04	9.75	5.85	4.50	2000
6	PCK-WR-06	12.75	8.85	7.50	2000
8	PCK-WR-08	15.75	11.85	10.50	2000
10	PCK-WR-10	18.75	14.85	13.50	2000
12	PCK-WR-12	21.75	17.85	16.50	2000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
 X ± 0.25
 .XX ± 0.15
 .XXX ± 0.08
 ANG ±

PPOJECTION



照片框

ORDER INFORMATION


PCK15-WR-xx-LF
 SERIES | T | LEADFREE
 | 04~12WAY
 REEL
 90°SMT

DESCRIPTION:



Feeding Direction

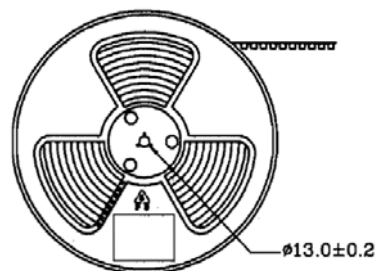



4 CIRCUITS

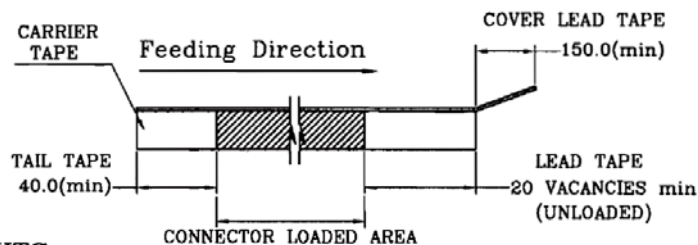

Circuits	Dimensions		Pcs/Reel
	A	B	
4	11.50	24.00	2000
6	28.40	32.00	2000
8	28.40	32.00	2000
10	28.40	32.00	2000
12	40.40	44.00	2000

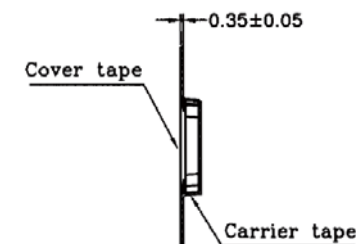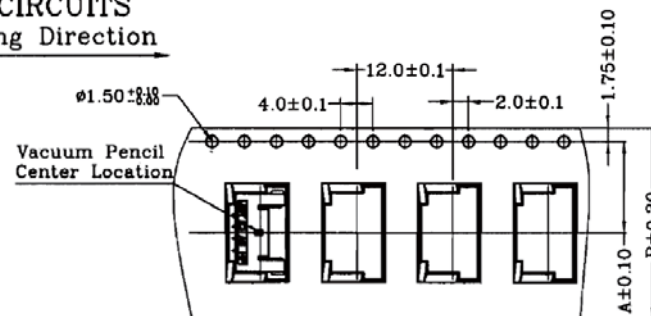

6 TO 12 CIRCUITS

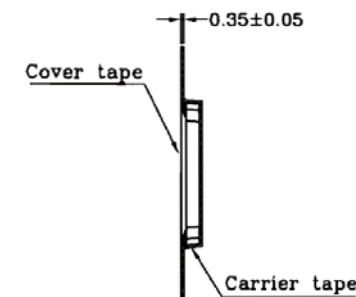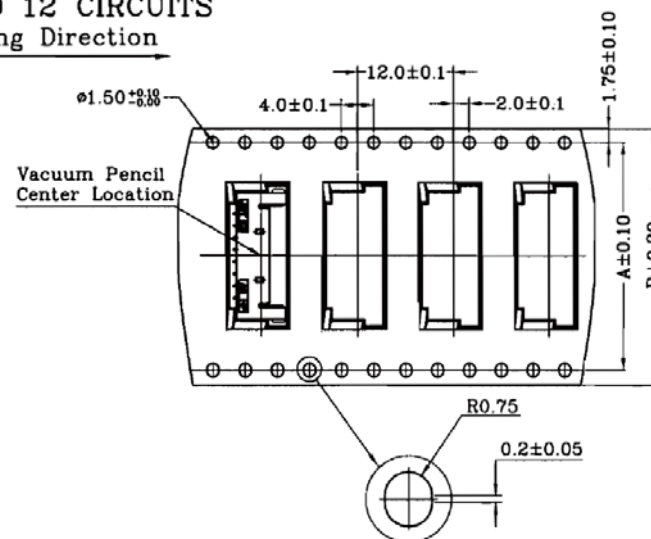

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.25
.XX ± 0.15
.XXX ± 0.08
ANG ±

照片框

ORDER INFORMATION

PCK15-WR-xx-LF

SERIES
LEADFREE
04~12WAY
REEL
90°SMT

DESCRIPTION: