


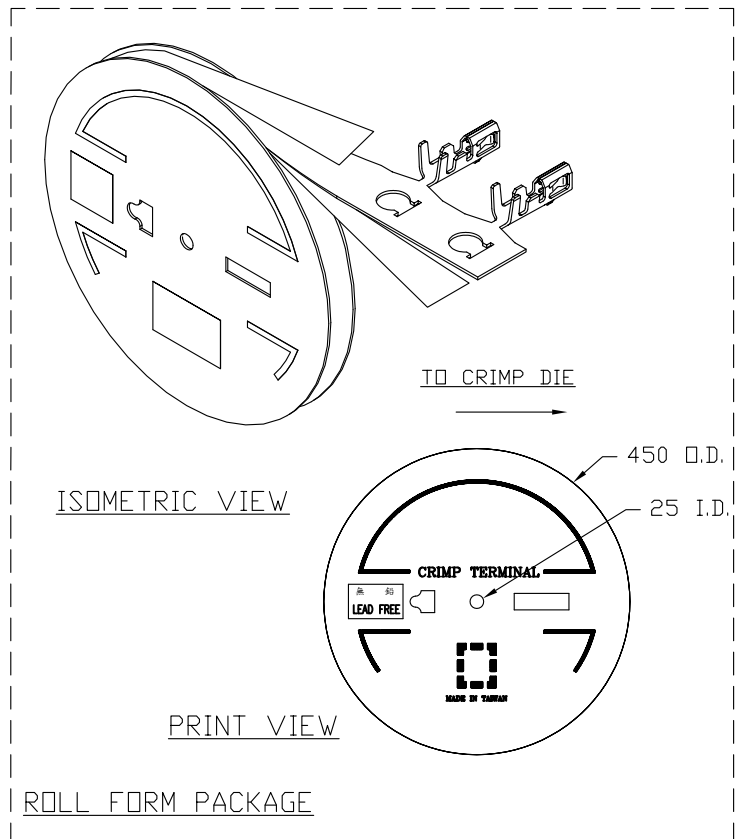


ORDER NO./DIMENSIONS:

ORDER NO.	TERMINAL TYPE	WIRE GAUGE	INSULATION DIAMETER	QUANTITY PER REEL
PCL-Tx-28	CHAIN	#28~#32	Ø 0.4 - 0.8	15,000 PCS

NOTES:

1. USE WITH PCL-H-2Xxx SERIES PLUG HOUSING.
2. GOLD PLATING IS MESURED AT CONTACT POINT AREA.
3. PRE TIN-PLATING IS PLATED WITH 80u" TIN OVER COPPER PLATING.
4. GOLD PLATING IS PLATED OVER 40 u" NICKEL PLATING.

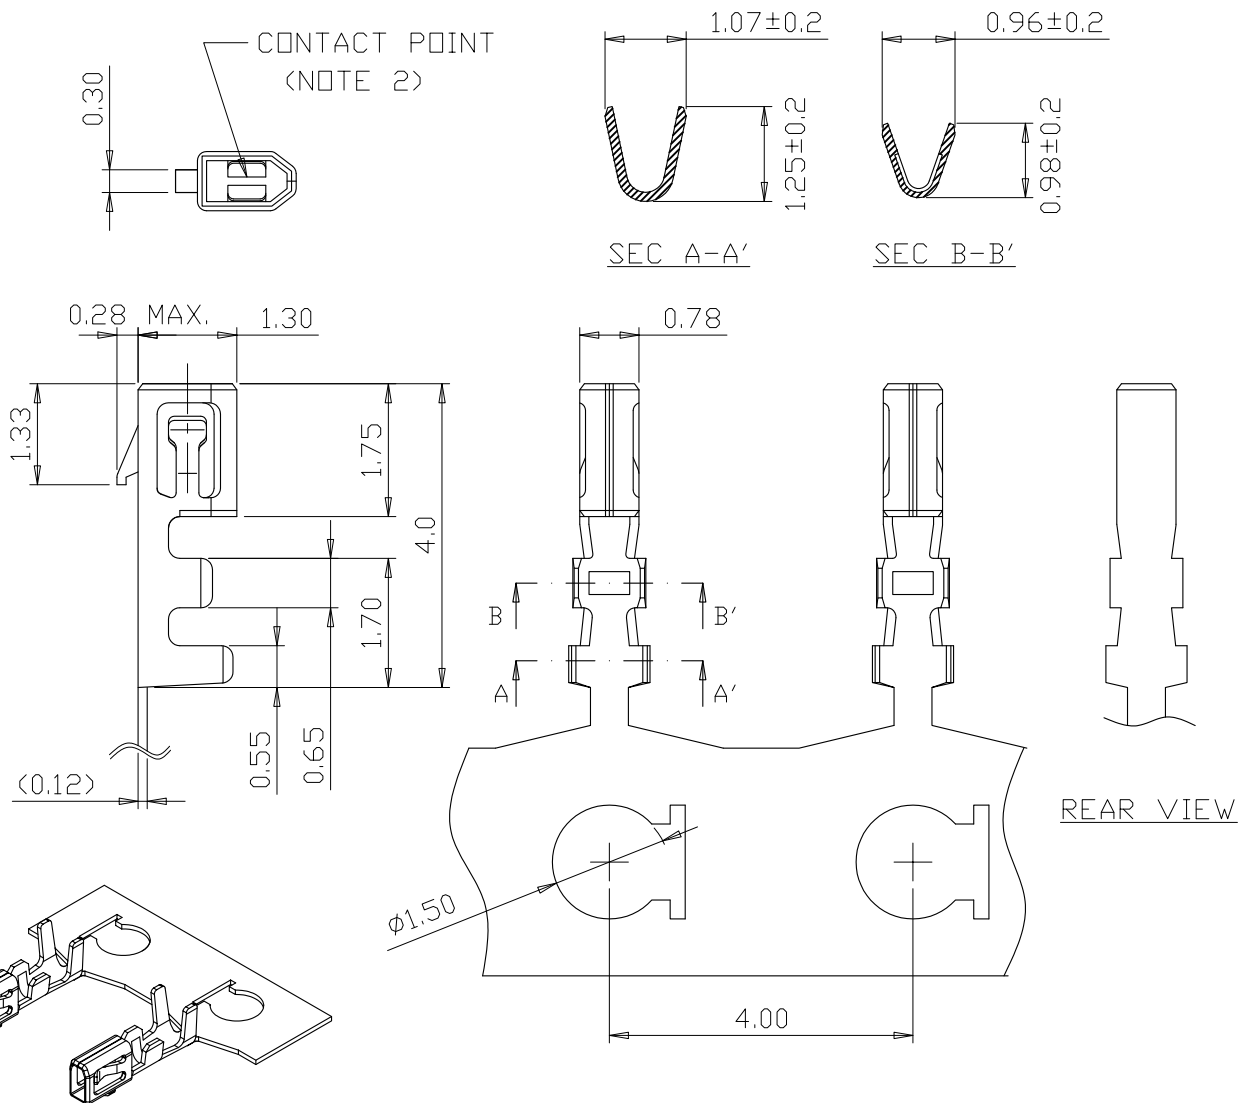

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±
X ± 0.25
.XX ± 0.12
.XXX ± 0.08
ANG ± 3°

照片框

ORDER INFORMATION

PCL-Tx-28-LF
SERIES T LEADFREE
28-32 AWG
BLANK: TIN
G: GOLD
TERMINAL

DESCRIPTION: