

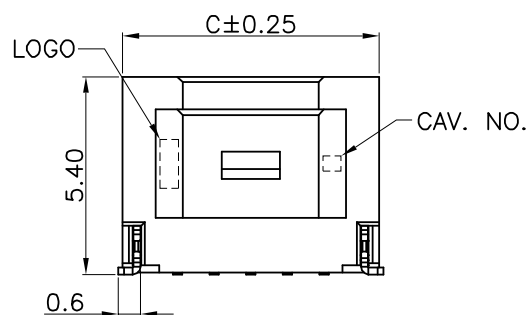

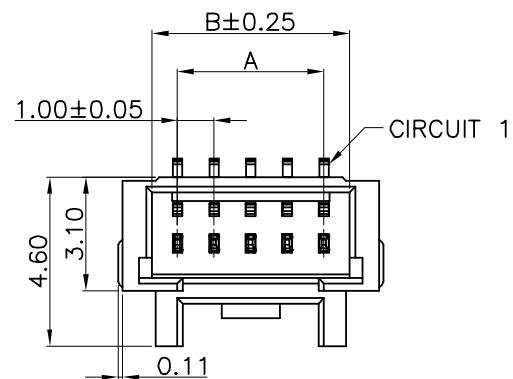


NOTES:

- MATERIAL:
INSULATION(HALOGEN FREE): NYLON 9T, UL94V-0 (BLACK)
CONTACT: COPPER ALLOY, $t=0.25\text{mm}$
SOLDER TAB: COPPER ALLOY, $t=0.20\text{mm}$ / MATTE-TIN PLATED OVER NICKEL
- CONTACT FINISH: MATTE-TIN PLATED OVER NICKEL

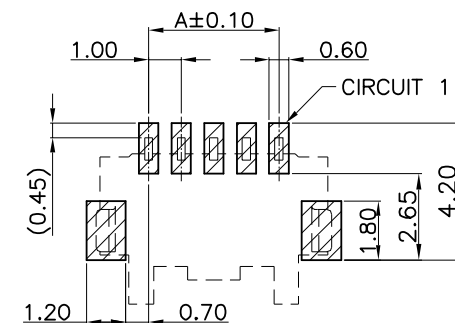

TOLERANCE: ± 0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

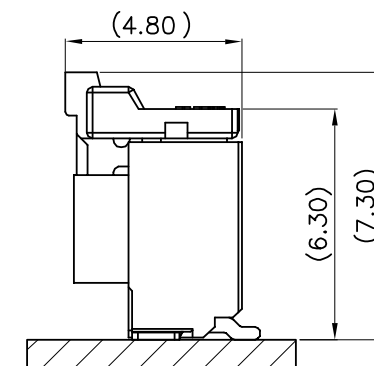

Mating Condition (REF.)

PIN	DIM.(mm)			
	A	B	C	D
1x03	2.00	3.40	5.00	4.50
1x04	3.00	4.40	6.00	5.50
1x05	4.00	5.40	7.00	6.50

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

PCLK-VXCR-1Xxx-LF

SERIES

180°SMT

REEL

CAP





NON POST

LEADFREE

1X03:03WAY

1X05:05WAY

DESCRIPTION: WIRE TO BOARD, PITCH 1.00mm, VERTICAL, SMT TYPE, ASSEMBLY

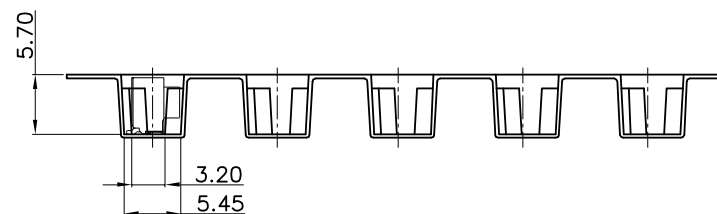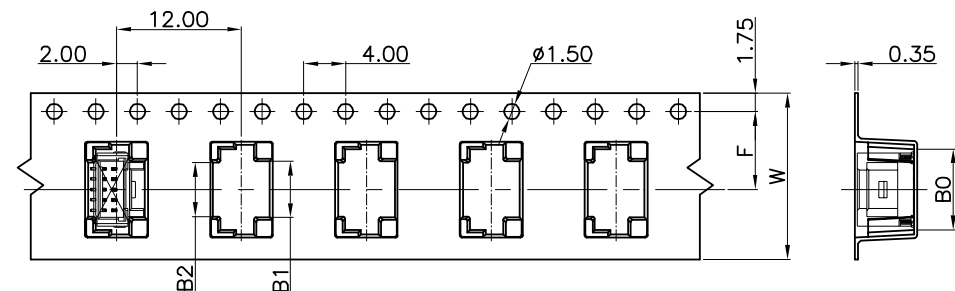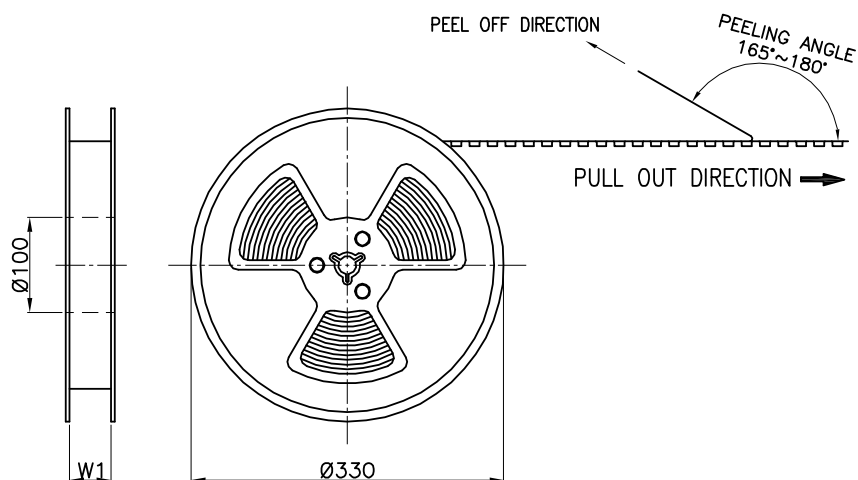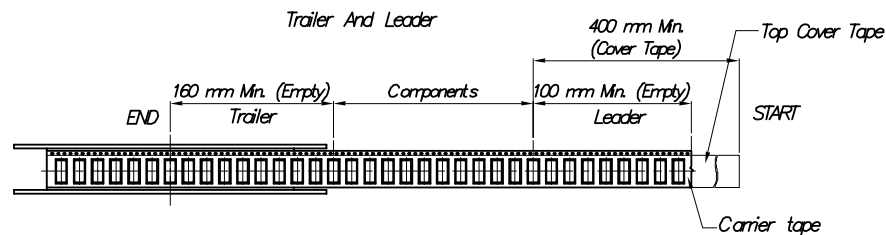

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. THE TOTAL TEARING CONTROL RANGE OF TOP COVER TAPE IS 10~130g, REFERENCE SPEC: EIA-481-D
4. PEELING SPEED: 300mm/MINUTES, REFERENCE SPEC: EIA-481-D
5. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
6. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS
7. THICKNESS : 0.35 ± 0.05 mm
8. COMPONENT LOAD PER 13" REEL : 1000 PCS

PIN	DIM.(mm)					
	B0	B1	B2	F	W	W1
1x03	5.20	4.40	3.20			
1x04	6.20	5.00	4.20	7.50	16.00	16.50
1x05	7.80	5.40	5.20			

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$

.X $\pm$ 0.25

.XX $\pm$ 0.15

.XXX $\pm$

ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

PCLK-VXCR-1Xxx-LF

SERIES

180°SMT

REEL

CAP

NON POST



LEADFREE

1X03:03WAY

1X05:05WAY

DESCRIPTION: WIRE TO BOARD, PITCH 1.00mm, VERTICAL, SMT TYPE, ASSEMBLY


PARTITION BOARD 2 PCS




PROTECT TAPE



INNER BAG




TRIANGLE BOARD 4 PCS

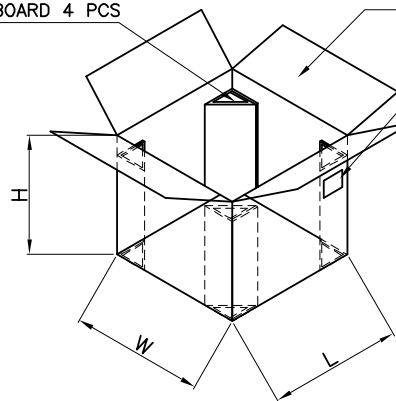

SHIPPING CARTON

TABEL



PACKING MATERIAL

PART NAME	DIM.(mm)
REEL	$\phi 330*(W+0.5)$
CARTON	350*350*340

PACKING CAPACITY

PIN	PCS/RE	RE/BC	PCS/BC
1x03~1x05	1000	14	14,000

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.25
.XX $\pm$ 0.15
.XXX $\pm$
ANG $\pm$ 3°

PPOJECTION

照片框

ORDER INFORMATION

PCLK-VXCR-1Xxx-LF

SERIES
180°SMT
REEL
CAP
NON POST
LEADFREE
1X03:03WAY
1X05:05WAY

DESCRIPTION: WIRE TO BOARD, PITCH 1.00mm, VERTICAL, SMT TYPE, ASSEMBLY