



1X02







1X03~1X05



CAV. NO. LOGO



CIRCUIT 1 0.25

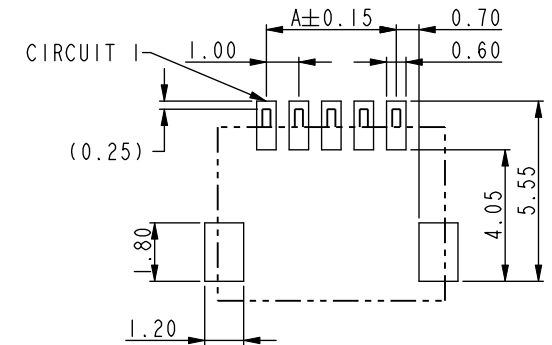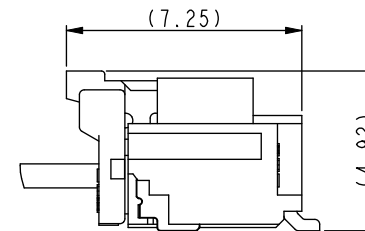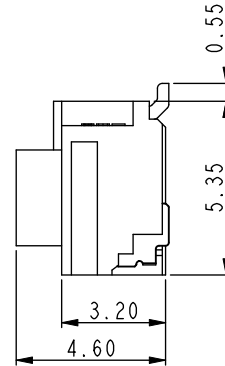

TOLERANCE: ±0.05
RECOMMENDED P.C.B. Layout
TOP VIEW

Mating Condition (REF.)

PIN	A	B	C	D
1X02	--	2.40	4.00	3.30
1X03	2.00	3.40	5.00	4.30
1X04	3.00	4.40	6.00	5.30
1X05	4.00	5.40	7.00	6.30

1	CONTACT	COPPER ALLOY; t=0.25mm	(1) TIN PLATED OVER NICKEL (2) GOLD FLASH PLATED ON CONTACT AREA & SOLDER TAIL, OVER NICKEL (3) *u" min. GOLD PLATED ON CONTACT AREA, GOLD FLASH ON SOLDER TAIL, OVER NICKEL
2	INSULATION	(HF) NYLON 9T, UL94-V0; COLOR: CREAM/BLACK	
3	SOLDER TAB	COPPER ALLOY; t=0.20mm	MATTE TIN PLATED OVER NICKEL
INDEX	PART NAME	MATERIAL	FINISH

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PROJECTION

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

照片框

ORDER INFORMATION

PCLK-WXR-1Xxx-LF

SERIES

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

T

1X02:02WAY


1X05:05WAY

REEL

NON POST

90°SMT

DESCRIPTION:

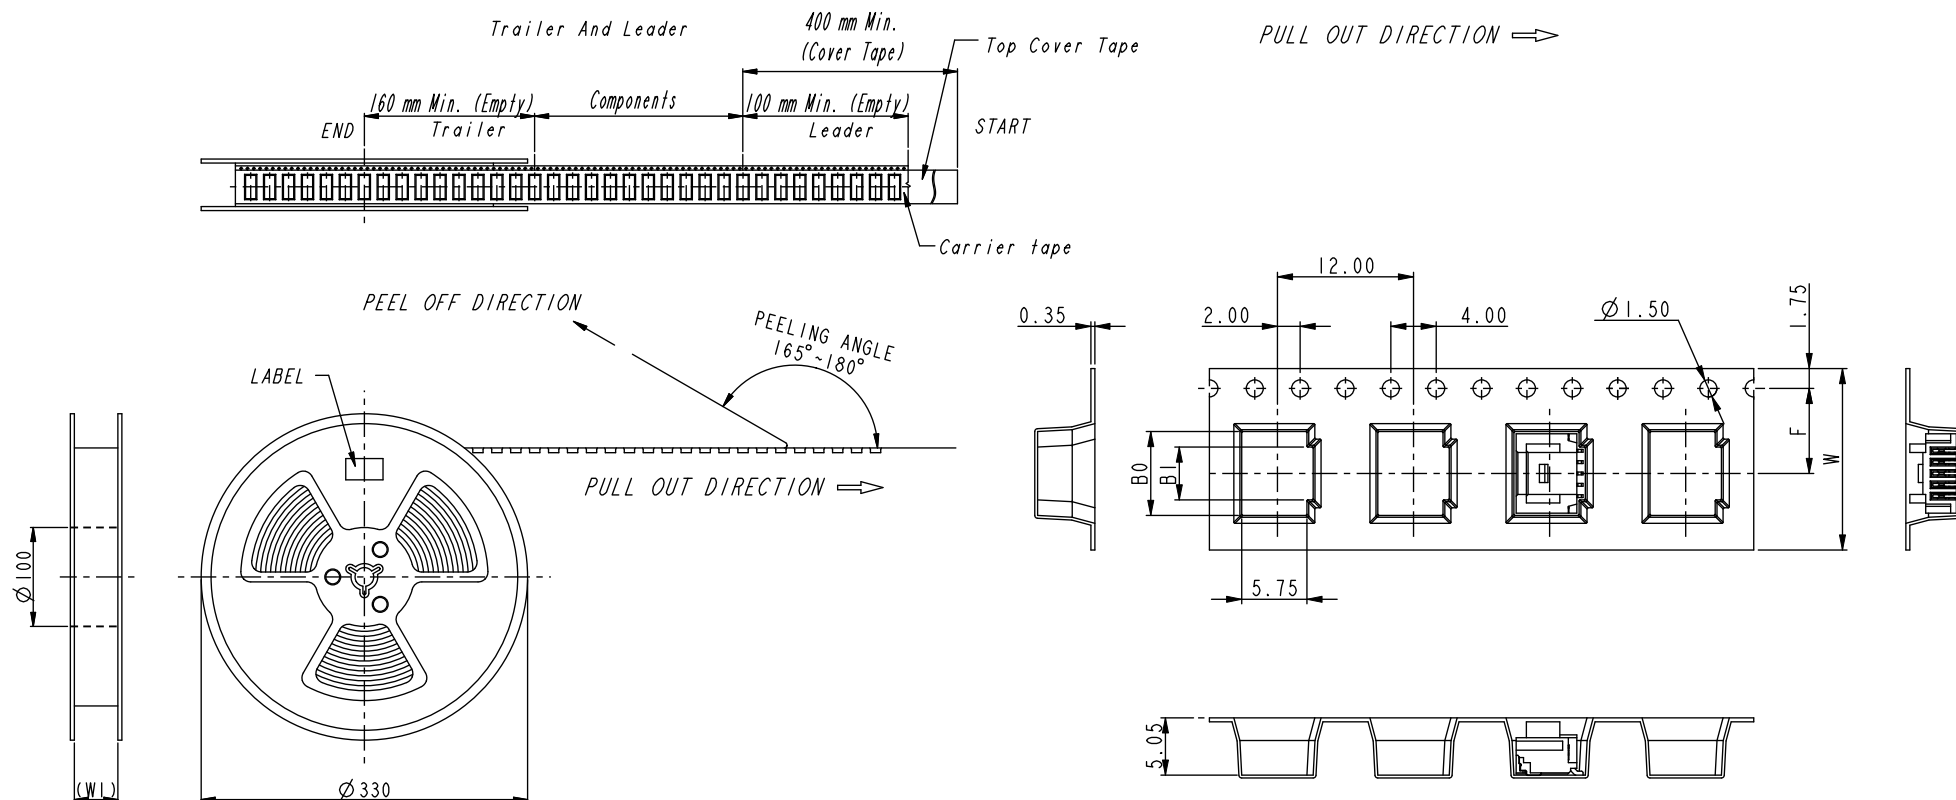

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.20
2. CARRIER CAMBER IS WITHIN 1 mm IN 250 mm
3. THE TOTAL TEARING CONTROL RANGE OF TOP COVER TAPE IS 10~130g, REFERENCE SPEC: EIA-481-D
4. PEELING SPEED: 300mm/MINUTES, REFERENCE SPEC: EIA-481-D
5. MATERIAL: TRANSPARENT CONDUCTIVE POLYSTYRENE ALLOY.(UP-5000)
6. ALL DIMENSIONS MEET EIA-481-D REQUIREMENTS
7. THICKNESS : 0.35 ± 0.05 mm

PIN	B0	BI	F	W	WI
1X02	4.40	1.66	7.50	16.00	16.50
1X03	5.40	2.66	7.50	16.00	16.50
1X04	6.40	3.66	7.50	16.00	16.50
1X05	7.40	4.66	7.50	16.00	16.50

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X ± 0.25
.XX ± 0.15
.XXX $\pm$
ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

PCLK-WXR-1Xxx-LF

SERIES

LEADFREE

1X02:02WAY


1X05:05WAY

REEL

NON POST




90°SMT

DESCRIPTION:

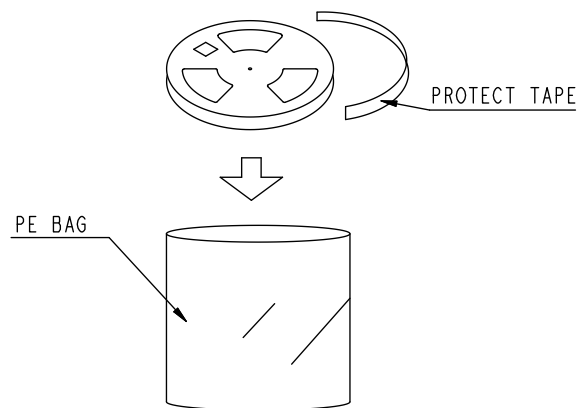

PIN	PCS/RE	RE/BC	PCS/BC
1X02	1000	12	12000
1X03	1000	12	12000
1X04	1000	12	12000
1X05	1000	12	12000

NOTES
 1. DIMENSION:
 REEL: $\varnothing 330 \times (W+0.5)$
 CARTON: 350*350*340

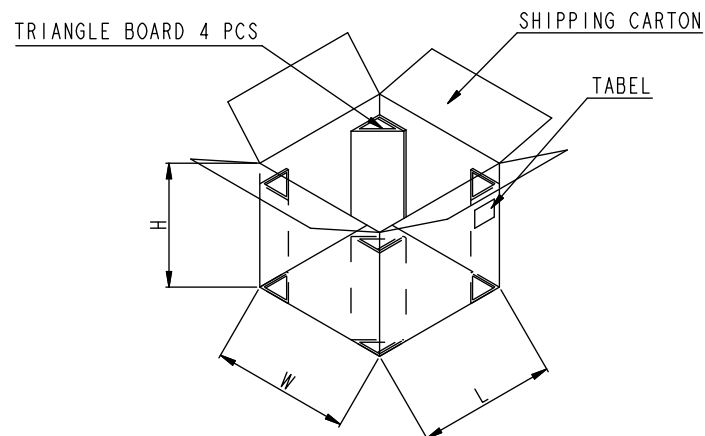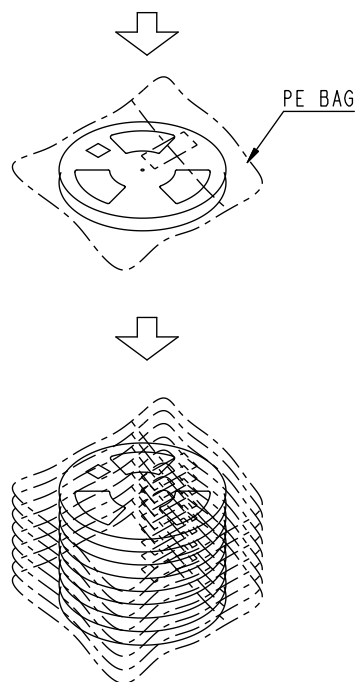

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
 .X ± 0.25
 .XX ± 0.15
 .XXX $\pm$
 ANG $\pm 3^\circ$

PPOJECTION

照片框

ORDER INFORMATION

PCLK-WXR-1Xxx-LF

SERIES

1X02:02WAY

1X05:05WAY

REEL

NON POST

90°SMT

LEADFREE

DESCRIPTION: