


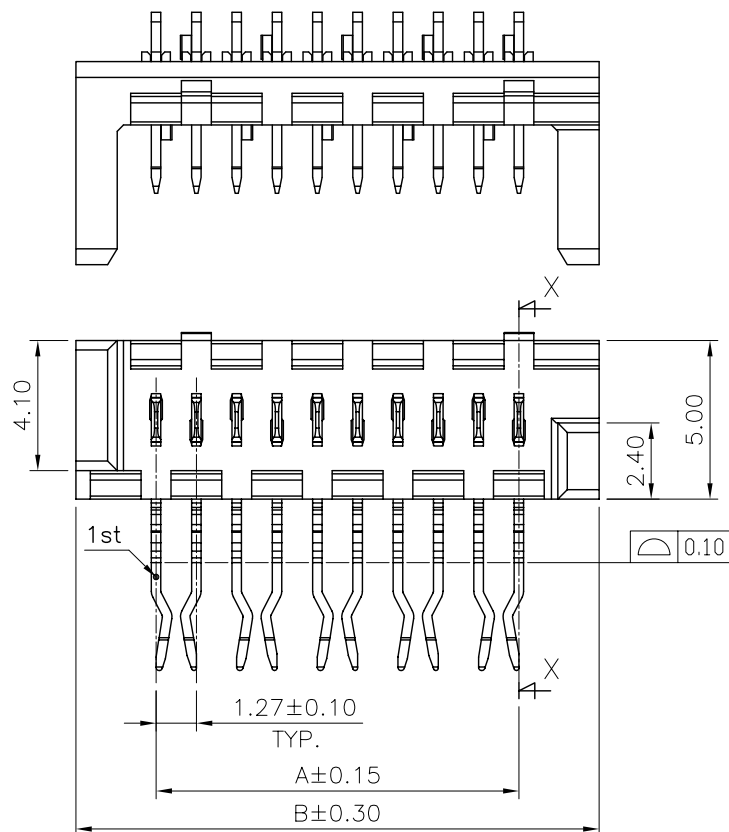


Material:



* Insulation:

Base: Nylon 6T +30% G.F UL 94V-0 (無鹵材質)

Contact: Brass

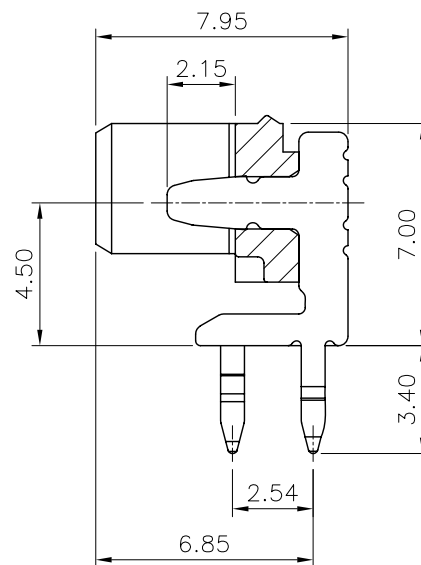


SEC. X-X

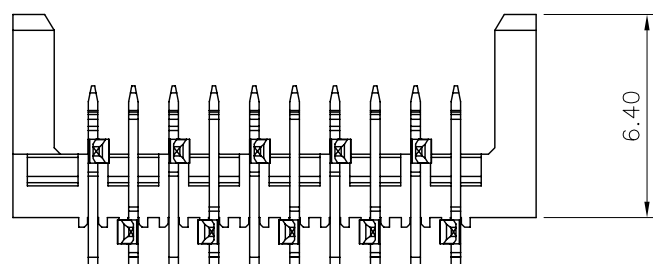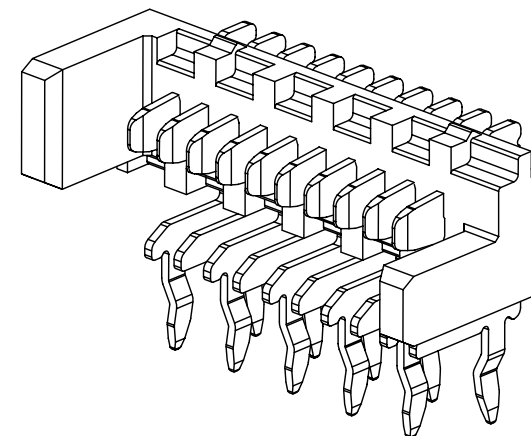

DIM.A= 1.27 x No. of Spaces

DIM.B= DIM.A + 5.05

*Available in 4 ~ 26 Circuits

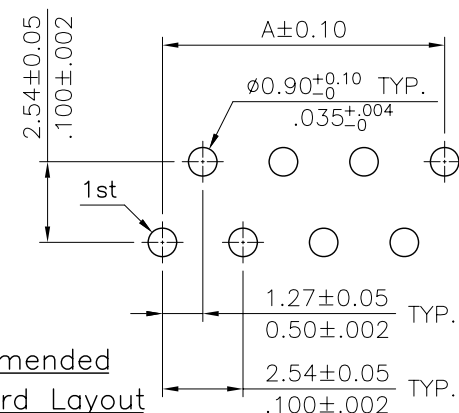

Recommended
P.C. Board Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PF-PRXK-xx-LF
SERIES LEADFREE
04~26WAY
KINK LEG
NON POST
DIP 90°
MALE

DESCRIPTION: