
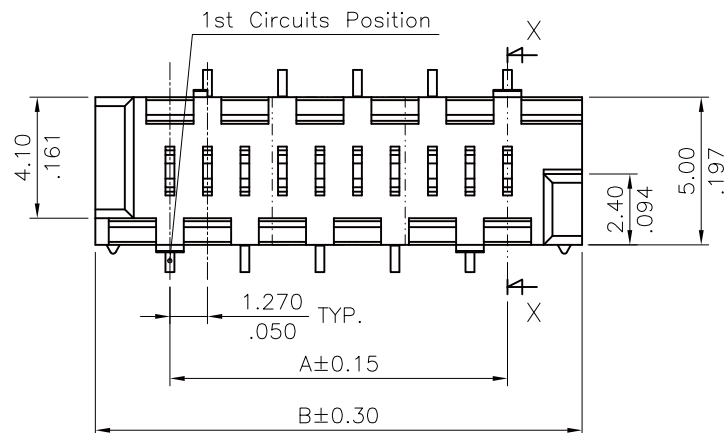
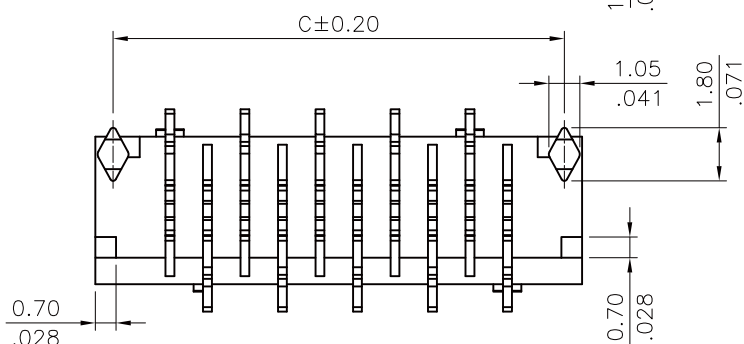



Material:

Insulation: High Temperature Plastic UL 94V-0

Contact: Brass

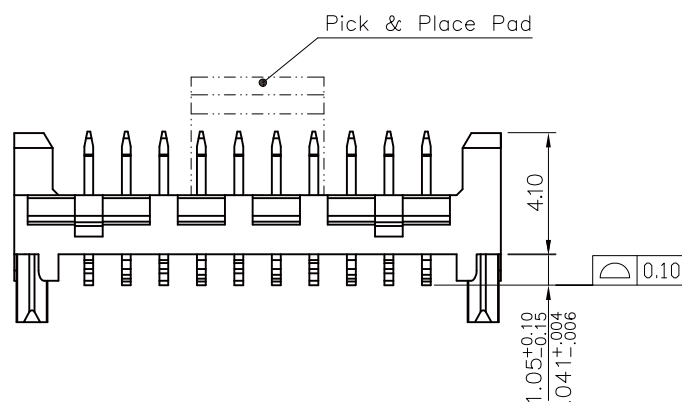

DIM.A= 1.27 x No. of Spaces

DIM.B= DIM.A + 5.05

DIM.C= DIM.A + 3.85

*Available in 4 ~ 26 Circuits

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°


PPOJECTION

照片框

ORDER INFORMATION

PF-PVP41CR-xx-LF
SERIES MALE 180°SMT REEL CAP POST
LEADFREE 04~26WAY

DESCRIPTION:

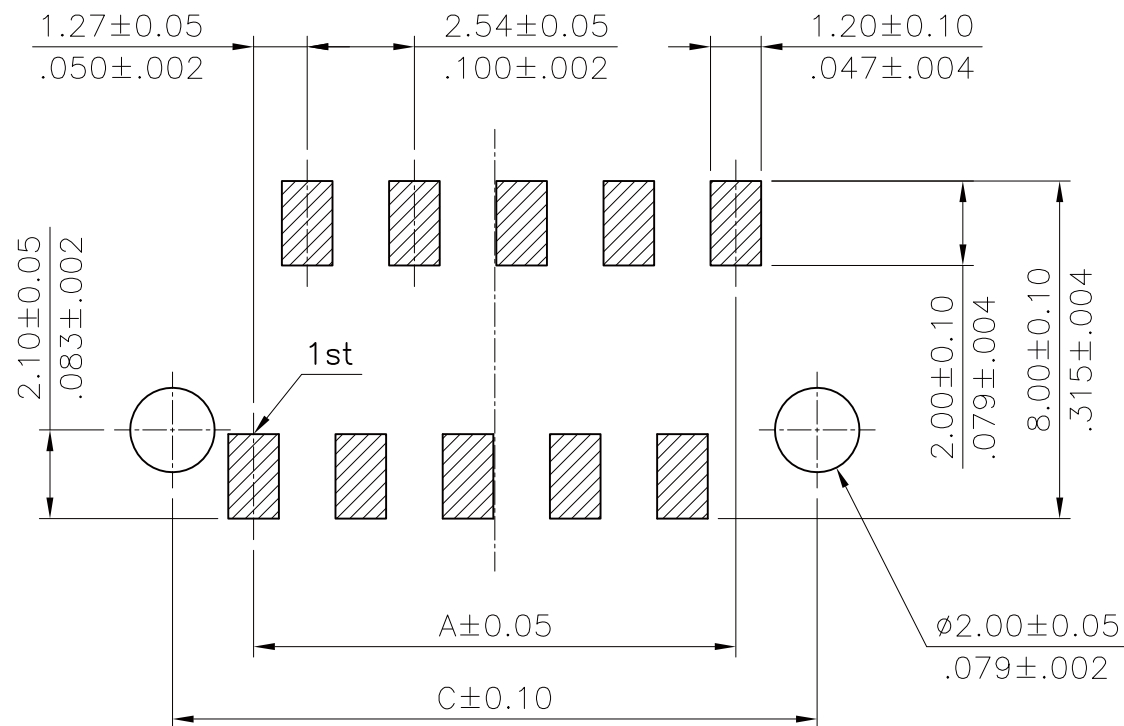

P.C.B Layout
Clearance Fit With P.C.B Pegs

DIM.A= 1.27 x No. of Spaces
DIM.B= DIM.A + 5.05
DIM.C= DIM.A + 3.85
*Available in 4 ~ 26 Circuits

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°


PPOJECTION

照片框

ORDER INFORMATION

PF-PVP41CR-xx-LF
SERIES MALE 180°SMT POST
REEL CAP 4.1mm
LEADFREE 04~26WAY


DESCRIPTION:

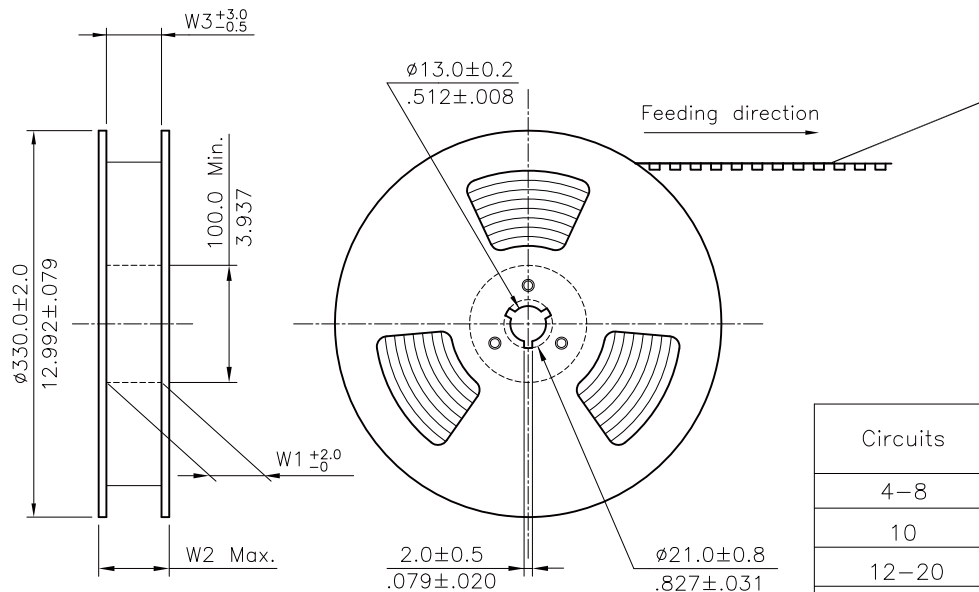

NOTE :

- * Reel Material : Corrugated Paper
- * Carrier Material : Transparent Anti-static Polystyrene
- * Cover Tape Material : Polyester
- * Cover Tape Peel Strength : 0.1N – 1.3N
- * Carrier camber is within 1mm in 100mm
- * Packing length per 22" reel : 24.6 Meters
- * Quantity : 600 PCS/Reel

Circuits	Dimension					Packing (Reel/Caton)
	E	F	W1	W2	W3	
4-8	24.0(.945)	—	24.5(.965)	30.5(1.201)	24.5(.965)	9
10	32.0(1.260)	28.40(1.118)	32.5(1.280)	38.5(1.516)	32.5(1.280)	7
12-20	44.0(1.732)	40.40(1.591)	44.5(1.752)	50.5(1.988)	44.5(1.752)	5
22-26	56.0(2.205)	52.40(2.063)	56.5(2.224)	62.5(2.461)	56.5(2.224)	3

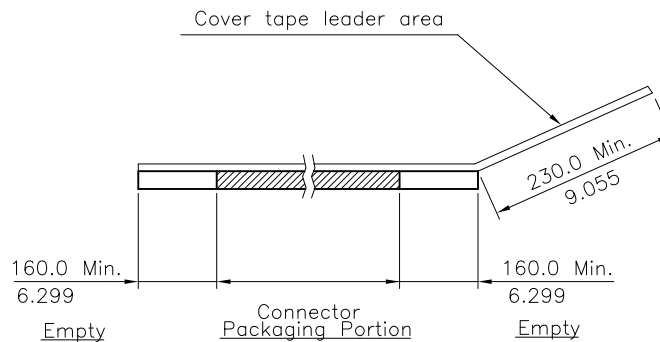

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°



PPOJECTION

照片框

ORDER INFORMATION

PF-PVP41CR-xx-LF
SERIES REEL LEADFREE
MALE 180°SMT 4.1mm POST
CAP 04~26WAY

DESCRIPTION:

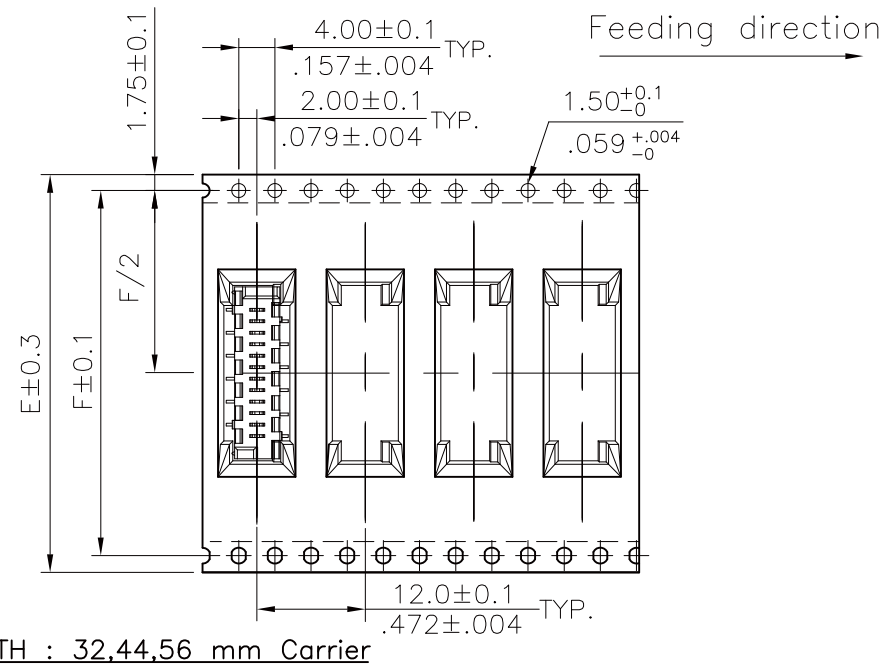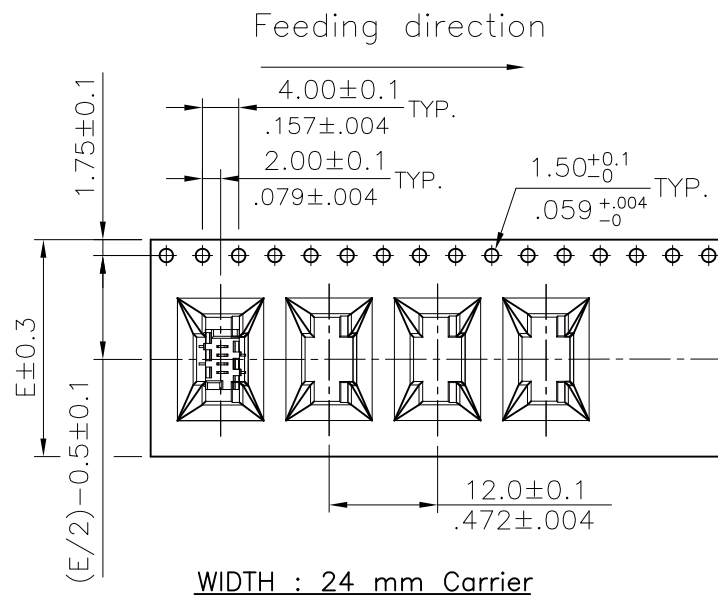

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

PF-PVP41CR-xx-LF
SERIES
MALE
180°SMT
REEL
CAP
4.1mm
POST
LEADFREE
04~26WAY

DESCRIPTION: