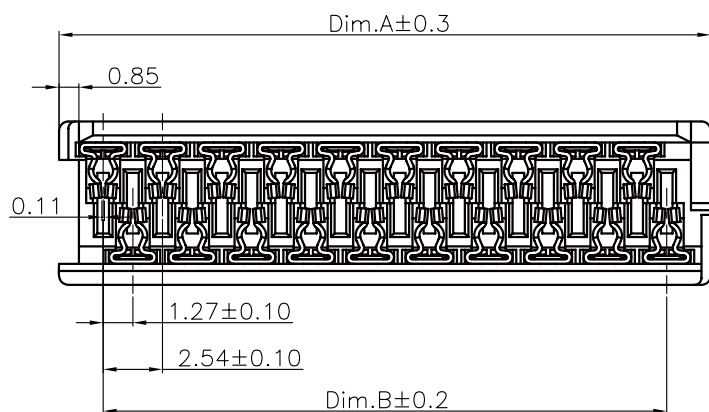
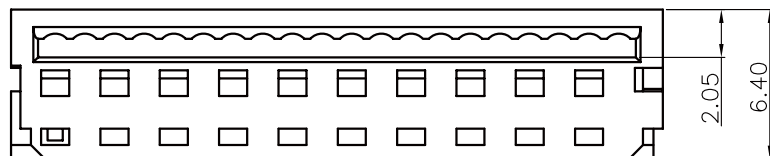


#### Specifications:

Current Rating:1.2A

Voltage Rating:32V

Contact Resistance:10m ohm. Max.

Insulation Resistance:1000M ohm. Min.

Withstanding Voltage:500V AC For One Minute

Operating Temperature Range:-40°C To +105°C

APPLICABLE WIRE: AWG #26 and #28

#### Materials:

Insulator:High Temp. Plastic(PBT UL94V-0)

Insulator Color:White

Contact:Phosphor Bronze

Plating:Tin Plated

#### Dimension:

| Pos. | Dimension |       | Pos. | Dimension |       |
|------|-----------|-------|------|-----------|-------|
|      | A         | B     |      | A         | B     |
| 04   | 7.59      | 3.81  | 16   | 22.83     | 19.05 |
| 06   | 10.13     | 6.35  | 18   | 25.37     | 21.59 |
| 08   | 12.67     | 8.89  | 20   | 27.91     | 24.13 |
| 10   | 15.21     | 11.43 | 22   | 30.45     | 26.67 |
| 12   | 17.75     | 13.97 | 24   | 32.99     | 29.21 |
| 14   | 20.29     | 16.51 | 26   | 35.53     | 31.75 |

#### RoHS Compliant

#### TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



#### ORDER INFORMATION

PF-SF-xx-LF  
SERIES | LEADFREE  
04-26WAY  
IDC  
FEMALE

DESCRIPTION: 1.27mm Flat IDC Connector