
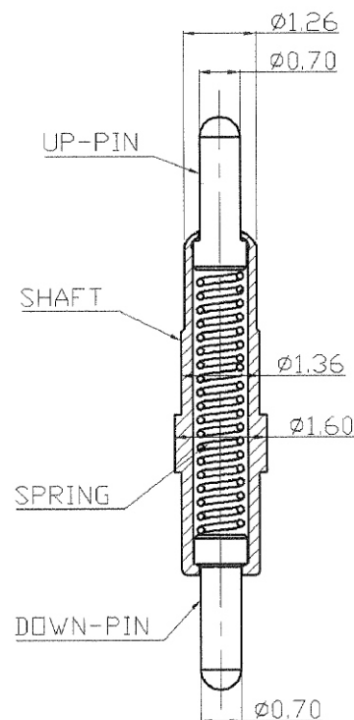


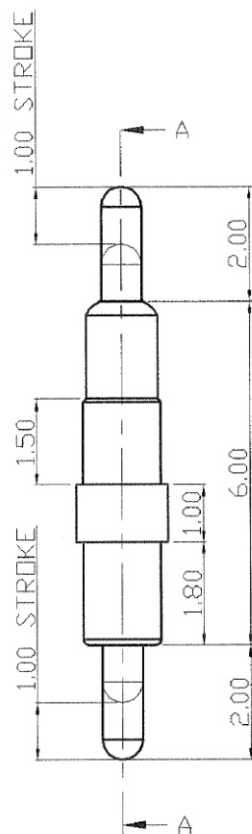

SECTION A-A

NOTE:

1. MATERIAL:

1-1 PIN: COPPER ALLOY.

1-2 TUBE: COPPER ALLOY.

1-3 SPRING: SWP-B, PIANO WIRE OR EQUIVALENT.

2. FINISH:

2-1 UP-PIN & DOWN-PIN: OVERALL 1u" MIN, GOLD OVER 3u" NICKEL

2-2 SHAFT: OVERALL 0.1u" MIN, GOLD OVER 1.73u" NICKEL

2-3 SPRING: OVERALL 0.1u" MIN, GOLD OVER 1.73u" NICKEL

3. MECHANICAL SPECIFICATION:

3-1 SPRING FORCE: 50±10gf @ CONNECTOR WORKING HEIGHT 8mm

3-2 DURABILITY: 2,000 cycles

3-3 MAX. STROKE FOR BOTH CONTACT PIN: 1.5mm

4. ELECTRICAL SPECIFICATION:

4-1 RATING VOLTAGE: 12v RMS

4-2 RATING CURRENT: 0.5A MAX.

4-3 CONTACT RESISTANCE:

30 mohms MAX @ CONNECTOR WORKING HEIGHT 7mm

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

PGP-D-078070-LF

SERIES

LEADFREE

MAX WORKING HEIGHT 7.0mm

TOTAL LONG 8.0mm

0.7 Ø

DIP 180°

DESCRIPTION: