
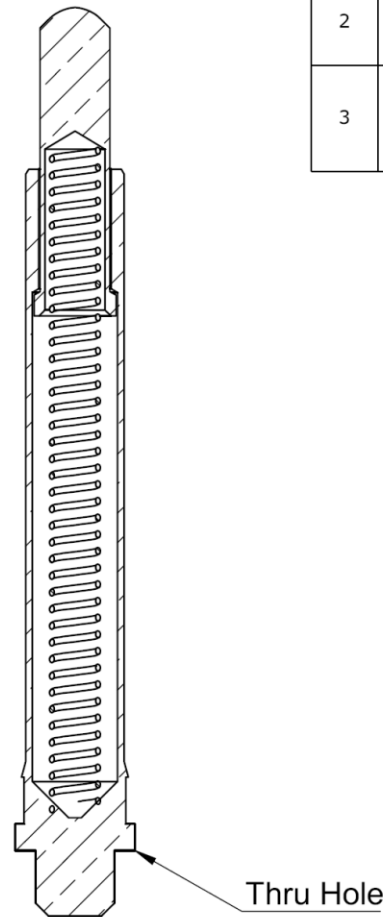


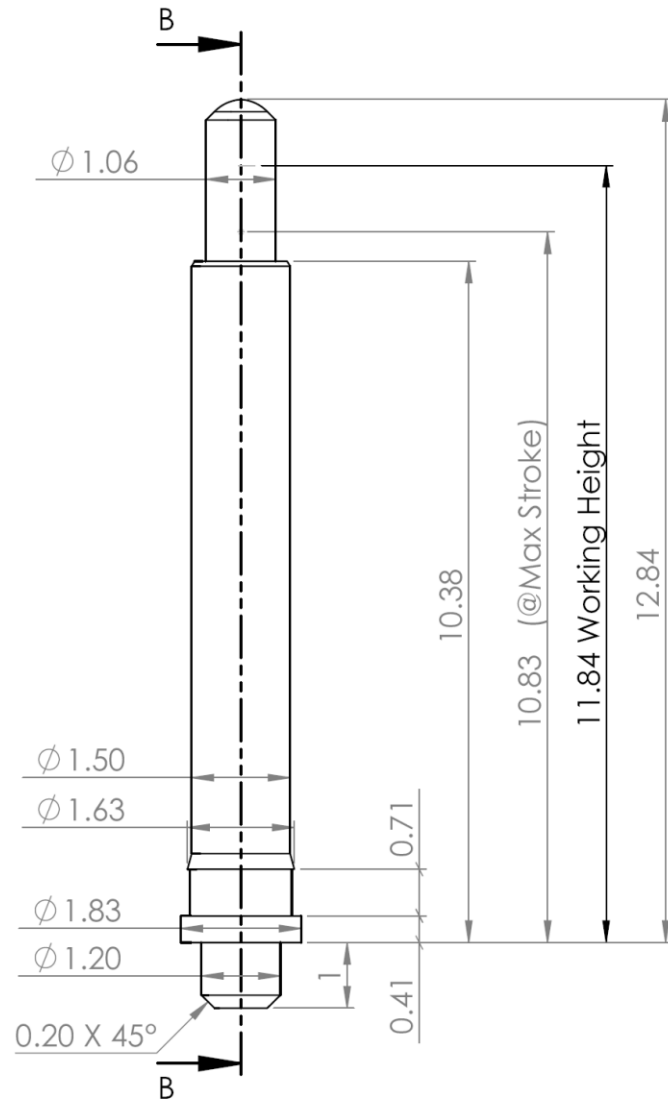

SECTION B-B
SCALE 10 : 1

ITEM NO.	DESCRIPTION	MATERIAL	PLATING	QTY.
1	BODY	C3604	Min 0.1um Gold plating over 1.4um Nickel Plating	1
2	PLUNGER	C3604	Min 0.4um Gold plating over 1.4um Nickel Plating	1
3	SPRING	Stainless Steel 304 or Beryllium cooper	----	1

Force @	Spring Load
MID stroke	60g
Initial (Pre-Load)	25g

Electrical:
Contact resistance: 30m Ohm Max.
Current rating: 2.0 A

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PGP-D-10128118-LF

SERIES

1.06 Ø

DIP 180°

LEADFREE

MAX WORKING HEIGHT 11.84mm

TOTAL LONG 12.84mm

DESCRIPTION: