


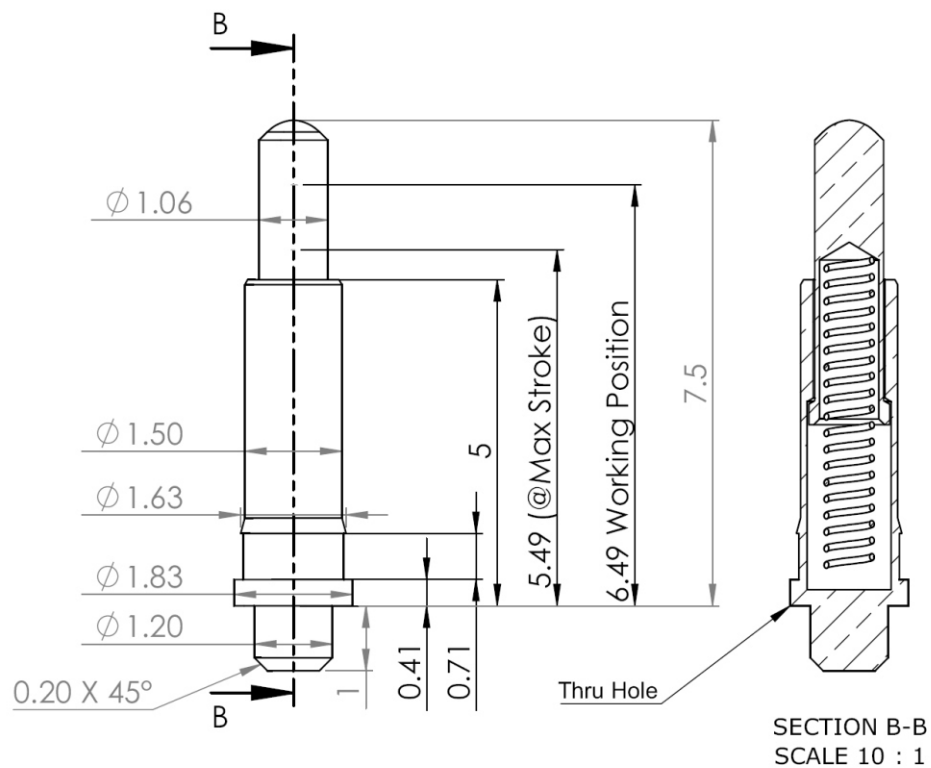


ITEM NO.	DESCRIPTION	MATERIAL	PLATING	QTY.
1	SPRING PIN BODY	Cooper Alloy C3604	Min 0.1um Gold plating over 1.4um Nickel Plating	1
2	SPRING PIN PLUNGER	Cooper Alloy C3604	Min 0.4um Gold plating over 1.4um Nickel Plating	1
3	SPRING	Stainless Steel 304	----	1

Force @	Spring Load
MID stroke	60g
Initial (Pre-Load)	25g

Electrical:
Contact resistance: 30m Ohm Max.
Current rating: 2.0 A

Used as contacts for speaker.

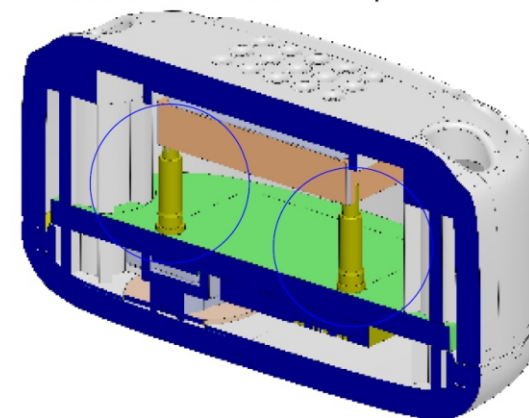

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PGP-D-107564-LF

SERIES

LEADFREE

MAX WORKING HEIGHT 6.49mm

TOTAL LONG 7.50mm

1.06 Ø

DIP 180°

DESCRIPTION: