


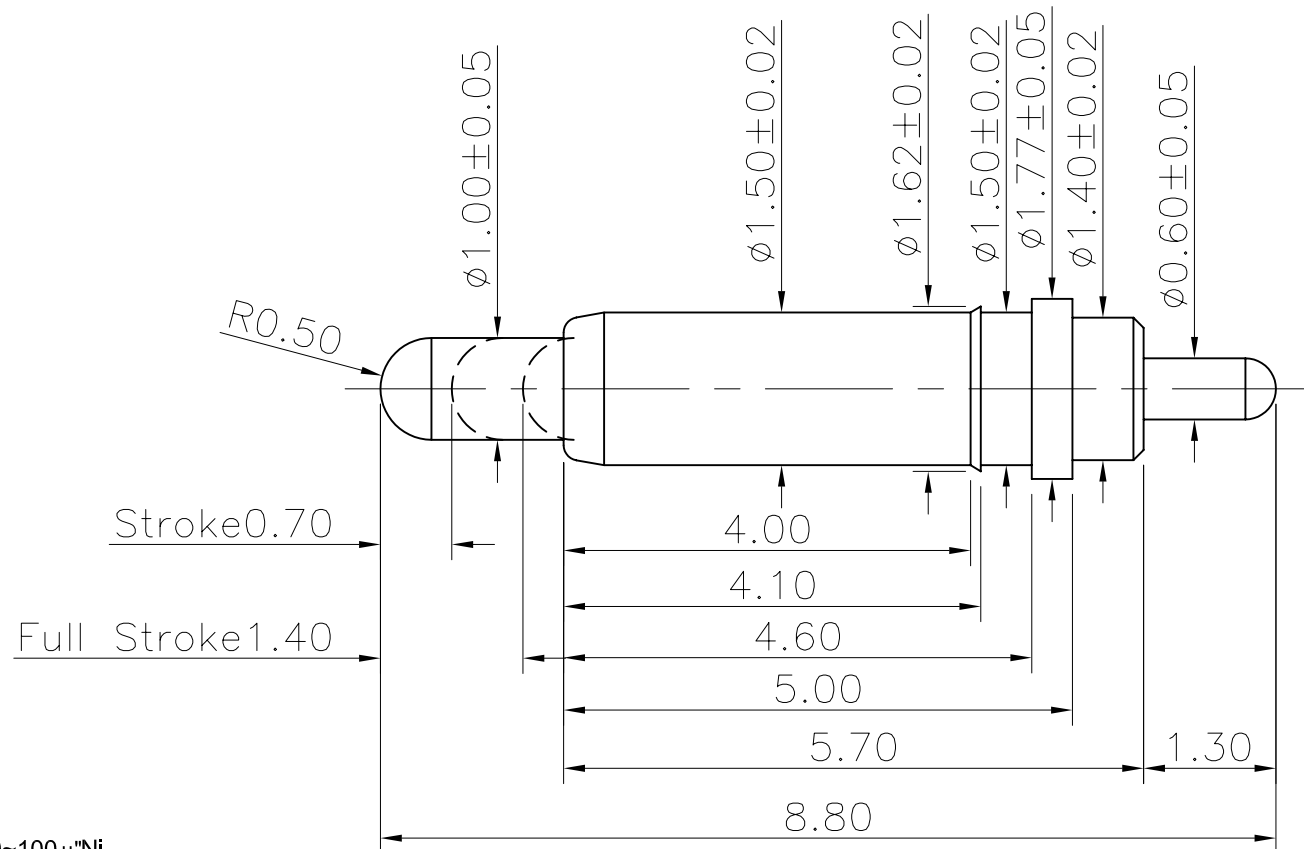

Notes:

1.Material

- .Plunger : Brass
- .Barrel : Brass
- .Spring : SUS304

2.Plating

- .Contact Surface : 10 μ " minimum Au Over 50~100 μ "Ni

3.Electrical

- .Rated Current & Voltage : DC 12 V ; 1 A
- .Contact Resistance : 50 $m\Omega$ maximum at 0.70 mm Stroke

4.Mechanical

- .Full Stroke: 8.80 mm
- .Spring Force : 110 g $\pm$ 20% at 0.70 mm Stroke
- .Durability : 10,000 Cycles(minimun)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

PGP-D-1X8.8-LF
SERIES | LEADFREE
TOTAL LONG 8.8mm
1.0 ϕ
180°

DESCRIPTION: POGO PIN