


Item	Part name	Q'ty/Ea'	Material	Finish
1	Plug connector	1		
2	Shell	1	PC/ABS	BLACK
3	Wire	1		
4	USB 2.0	1		
5				

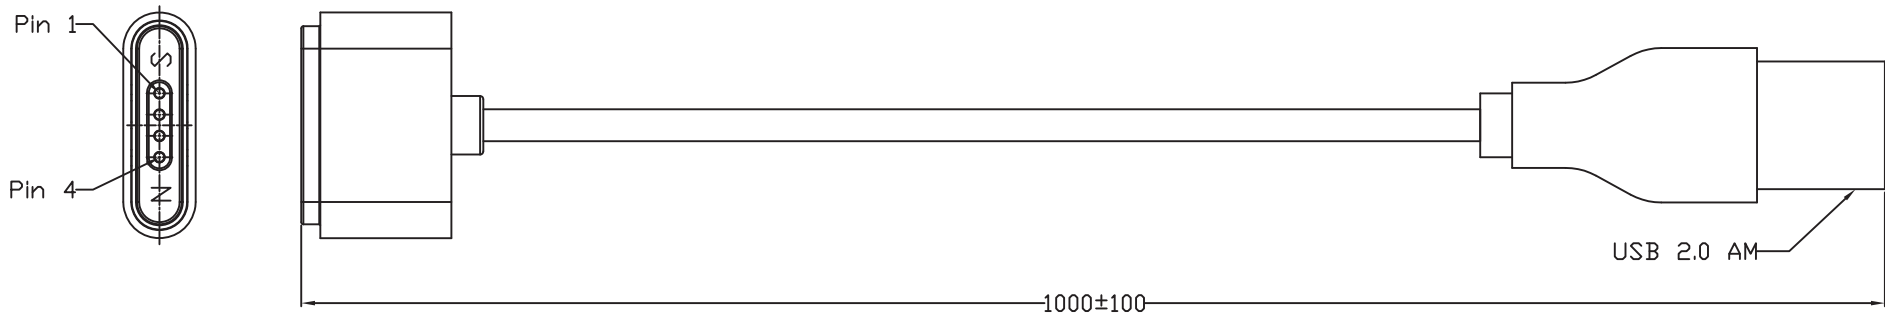

- NOTES:
1. SPECIFICATION:
- 1.1 ELECTRICAL CHARACTERISTICS:
- OPEN AND SHORT TEST
- DIELECTRIC WITHSTANDING VOLTAGE:500V DC
- INSULATION RESISTANCE:10M OHM
- CURRENT RATING 0.5A
- 1.2 ENVIRONMENTAL CHARACTERISTICS:
- OPERATING TEMPERATURE RANGE : -40°C TO +85°C.
2. DIMENSION SHALL BE INTERPRETED PER ASME Y14.5M-2009.
3. HARMFUL MATERIAL CONTROL FOLLOW "RoHS"

PIN ASSIGNMENTS		
Contact Number	Signal Name	Color
1	VCC	Red
2	D+	Green
3	D-	White
4	GND	Black

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ± 0.20
.XX ± 0.15
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

PGP20UB-044A24MS1-M1M-LF

SERIES

LEADFREE
1000mm
MALE TO MALE
MAGNETIC SUCTION
24 AWG
04 TO 04 A TYPE

DESCRIPTION: 4PIN MAGNET CONNECTOR/USB 2.0 CABLE ASSY.