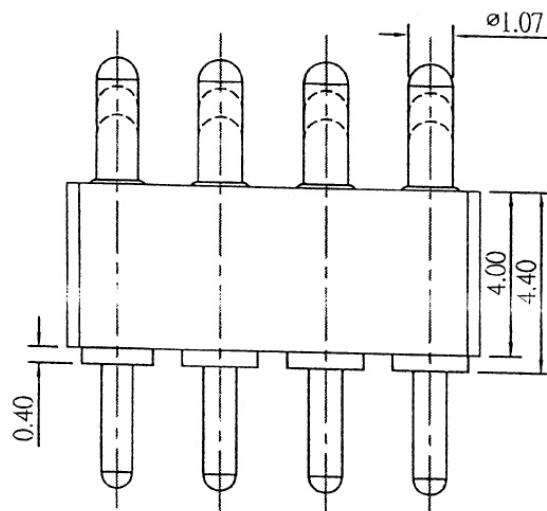
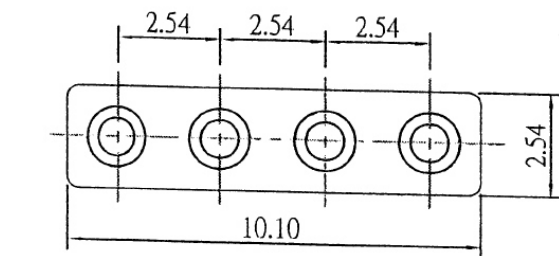


Note:

.Materials

Housing : Black glass filled polyster  
UL 94V-0

Plunger & Barrel : Brass

Spring : Stainless Steel

.Plating

Plunger : 20  $\mu$ " minimum Au over,  
50  $\mu$ " minimum Ni

Barrel : 10  $\mu$ " minimum Au over,  
50  $\mu$ " minimum Ni

.Electrical

Contact Resistance : 50m $\Omega$  max  
at Working Length

.Mechanical

Total Length : 7.50 mm

Working Length : 6.80mm

Soring Force : 0.85N  $\pm$  0.2N at Working Length

Durability : 50,000 Cycles minimum

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X,  $\pm$   
.X  $\pm$   
.XX  $\pm$   
.XXX  $\pm$   
ANG  $\pm$

照片框

ORDER INFORMATION

PGP26-D075-1X04-LF

SERIES

LEADFREE

04 WAY

HIGH 7.5mm

DIP 180°

DESCRIPTION: